


**SECTION 9
TOWN OF MENASHA**

SCALE .001".1
CHECKED M DATE 10-10-67
SCHUMAN

卷之三

9 20 17 3

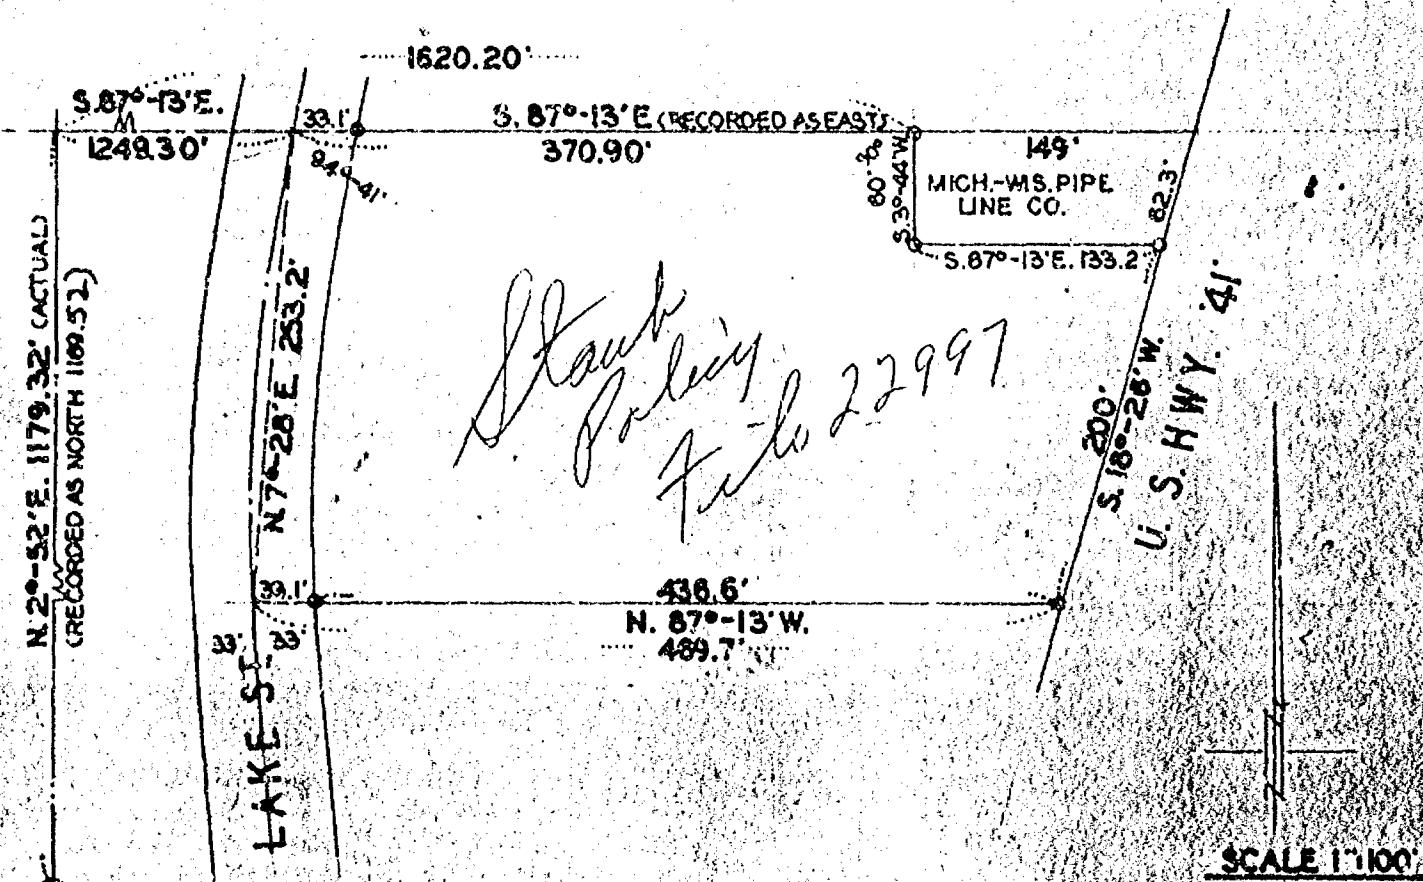

SCALE 1:100

IRON

CENTER OF
SEC. 9 T. 23 N.
R. 17 E.

DESCRIPTION

That part of the N.E. $\frac{1}{4}$ of Section 9 T.20N., R.17E., in the Town of Menasha, Winnebago County, Wisconsin described as follows:
Commencing at the center of Section 9, T.20N., R.17E., thence N.2°-52' E. 117.32 ft.; thence S.87°-13'E. 1620.20 ft. to the point of beginning; thence S.3°-44'W. 60ft.; thence S.87°-13'E. 133.2 ft. to the westerly R.O.W. line of U.S.Highway '41'; thence S.18°-26'W. along the westerly R.O.W. line of U.S.Highway '41' 200.0 ft.; thence N.87°-13'W. 469.7 ft. to the centerline of the pavement of Lake St. (formerly Hwy. '125'); thence along the curve of said pavement, to the right, having a chord bearing of N. 7°-28'E. and a chord distance of 253.2 ft.; thence S.87°-13'E. 370.9 ft. to the point of beginning.

CERTIFICATE OF SURVEY

I, David D. Eisele, hereby certify that I surveyed the above described property according to the official records and that the above plat is a true and correct representation thereof.

7-24-70

Date

Rev. 8/12/70

10

of.
David R. Embley

David D. Eisale

Reg. Wis. Land Surveyor S-971

