

CITY OF OSHKOSH

11th Ward

**Shred.**


No. 2-150C

HASTINGS, MN

LOS ANGELES-CHICAGO-LOGAN, OH

MCGREGOR, TX-LOCUST GROVE, GA

U.S.A.

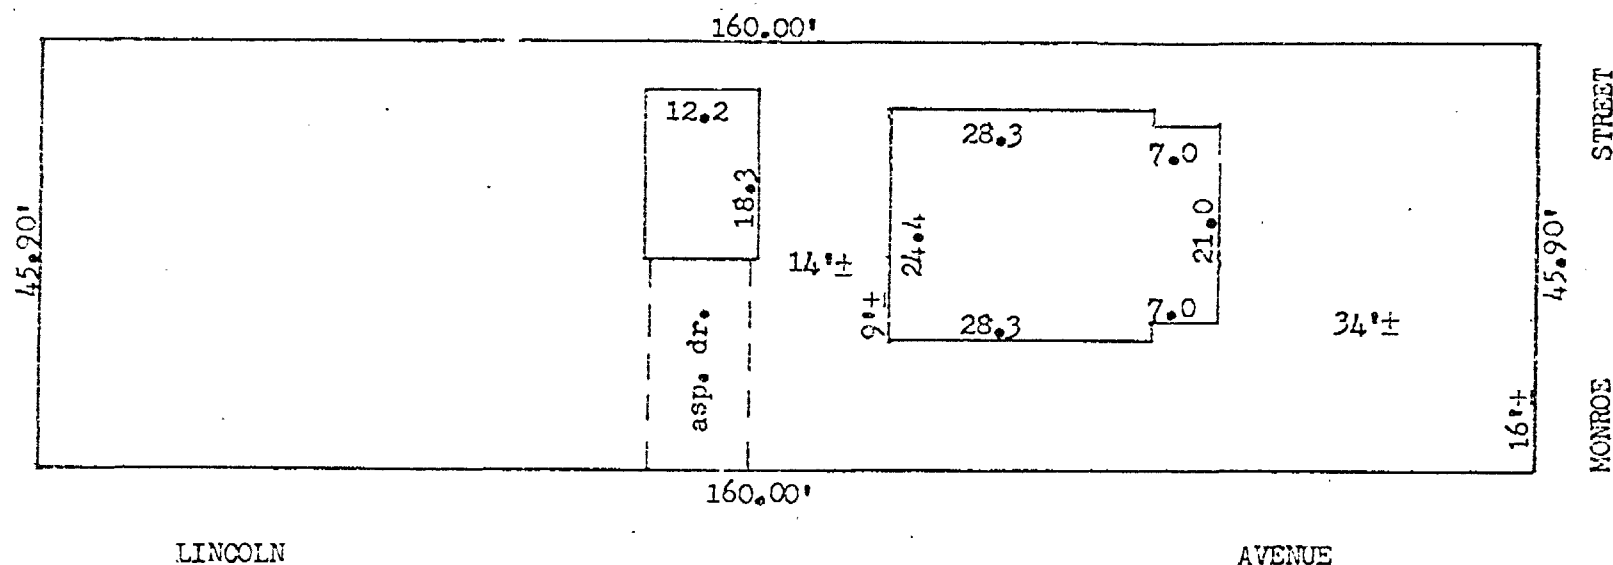


Lot Nine (9) of Block Three (3) in KIRST AND BEGLINGER'S SUBDIVISION, in the Eleventh Ward, City of Oshkosh, Winnebago County, Wisconsin.

—LAWLER—

803 MONROE STREET

NO BUILDING ENCROACHMENTS PRESENT

1½ STORY HOUSE



*Robert F. Reider*

I, ROBERT F. REIDER certify that this mortgage inspection was made by me or under my direction and control of the described property on, March 3, 1988, according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. Shawmut First Mortgage Corp. in agreement with Carow Land Surveying Co., Inc. has waived parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: SHAWMUT FIRST MORTGAGE CORP.

REVISIONS	Shawmut First Mortgage Corp. 54 Park Place, Appleton, Wisconsin 54915		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
	DRAWN BY mv-dw	KO	SCALE 1"=20'
	APPRO	X	DATE 3-4-88
			DRAWING NO. 883.12

## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys. A-E 5.02 U.S. public land survey monument record.

A-E 5.01 Minimum standards for property surveys. (1) SCOPE. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) PROPERTY SURVEY. DEFINITION. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) BOUNDARY LOCATION. Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) DESCRIPTIONS. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 5

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) MEASUREMENTS. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.


(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1975, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1976, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and f. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320



—KUNDERT— 816 BOWEN STREET  
NO BUILDING ENCROACHMENTS PRESENT  
2 STORY HOUSE

I, ROBERT F. REIDER

certify that this mortgage inspection was made by me or under my direction and control of the described property on, March 3, 1988, according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. Chase Home Mortgage Corp. in agreement with Carow Land Surveying Co., Inc. has waived parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: CHASE HOME MORTGAGE CORP.

REVISIONS	Chase Home Mortgage Corp. P.O. Box 28165 Green Bay, Wisconsin 54304		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
DRAWN BY M.V.-dw	KO	SCALE 1"=20'	DRAWING NO.
APPRO	X	DATE 3-7-88	883.11

## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys  
 A-E 5.02 U.S. public land survey monument record

A-E 5.01 Minimum standards for property surveys. (1) SCOPE. The minimum standards of this section apply to every property survey performed in this state except that.

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) PROPERTY SURVEY, DEFINITION. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) BOUNDARY LOCATION. Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) DESCRIPTIONS. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 5

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) MEASUREMENTS. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and 7. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, No. 320

# PLAT OF SURVEY

KNOWN AS 709 EAST NEW YORK AVENUE. BEING LOT 5 AND THE EAST 55.5 FT. OF LOT 19, ALL IN CASWELL'S ADDITION, 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.


OCTOBER 14, 1937

SURVEY FOR JACKIE HUBERTY


SURVEY NO. 87-1138

- ——— DENOTES 1" DIAMETER IRON PIPE FOUND AS SHOWN.
- ——— DENOTES 1 INCH BY 24 INCH IRON PIPE SET.

( ) = RECORD DIMENSIONS WHERE DIFFERENT FROM FIELD MEASUREMENTS.  
NEW YORK AVENUE 60ft.

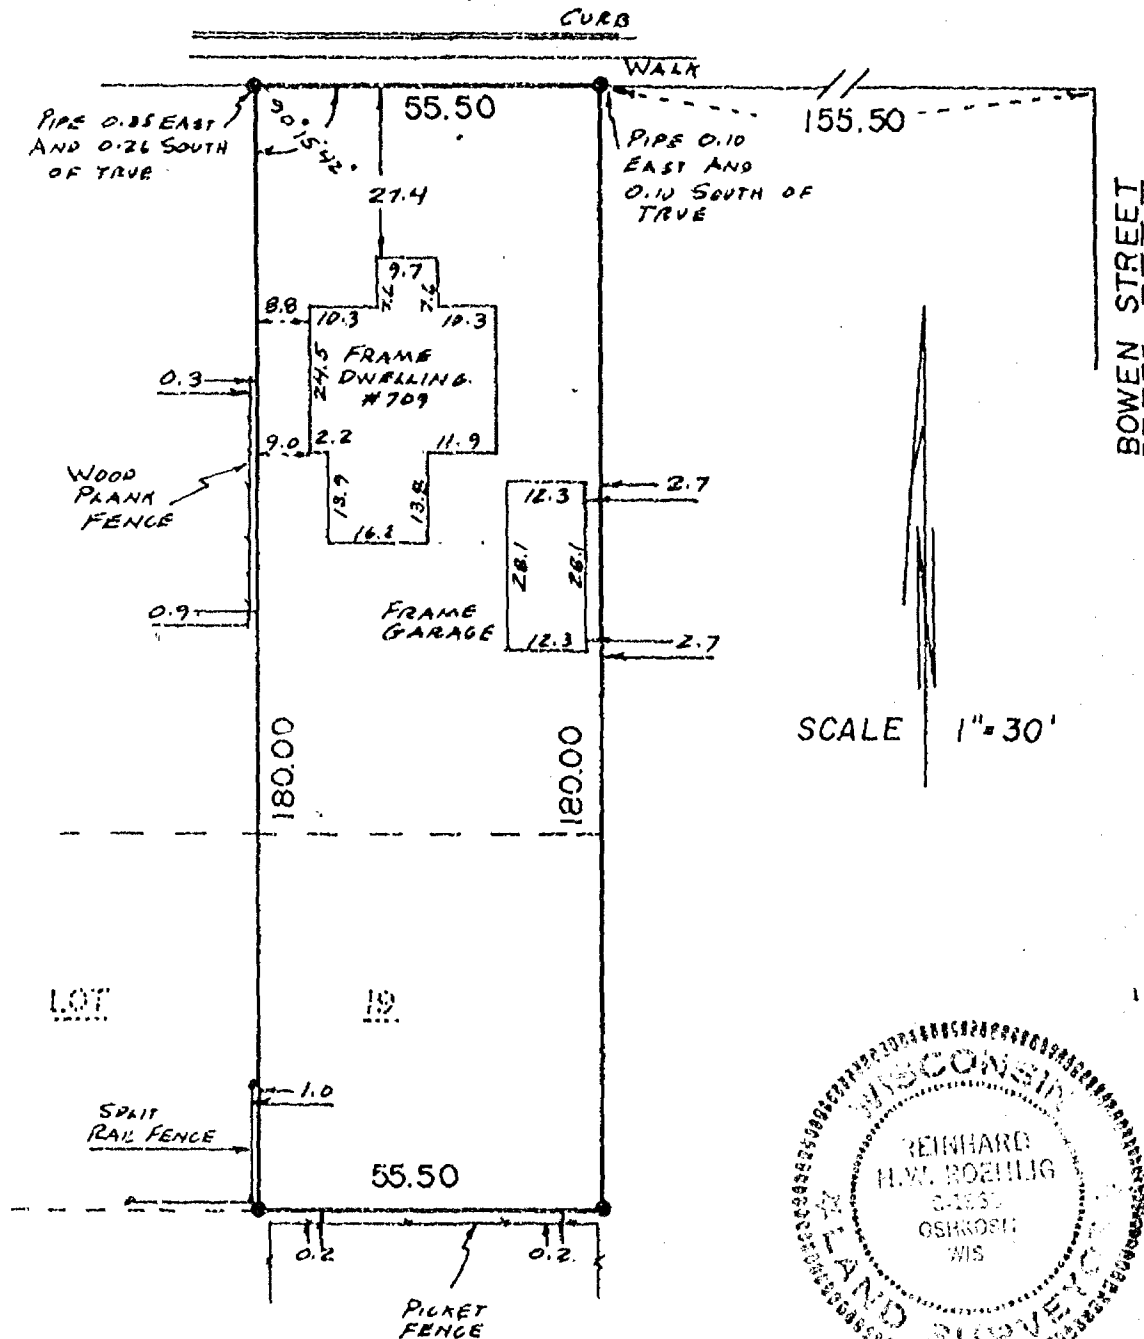

SCALE 1"=30'

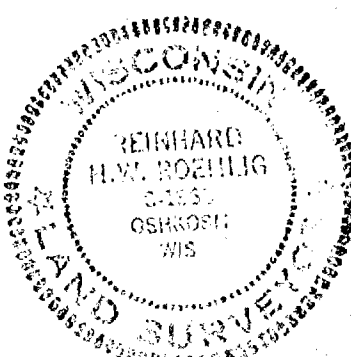

## SURVEYOR'S CERTIFICATE

I, REINHARD H. W. ROEHLIG, Registered Land Surveyor No. 6-1368, hereby certify That I have surveyed the property described hereon and that the above map is a true representation thereof and shows the size and location of the property, its exterior boundaries, the location and dimensions of all visible structures thereon, fences, apparent easements, roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the property, and also those who purchase, mortgage, or guarantee the title thereto within one (1) year from the date hereon, and as to them I certify the accuracy of said survey and map.

## SCHULER & ASSOCIATES


320 W. Northland Ave.  
 Appleton, WI. 54912  
 (414) 734-9107

2530 W. 20th Ave.  
 Oshkosh, WI. 54904  
 (414) 426-2800

REGISTERED LAND SURVEYOR


DATE

*Reinhard H. W. Roehlig*  
 10/14/37

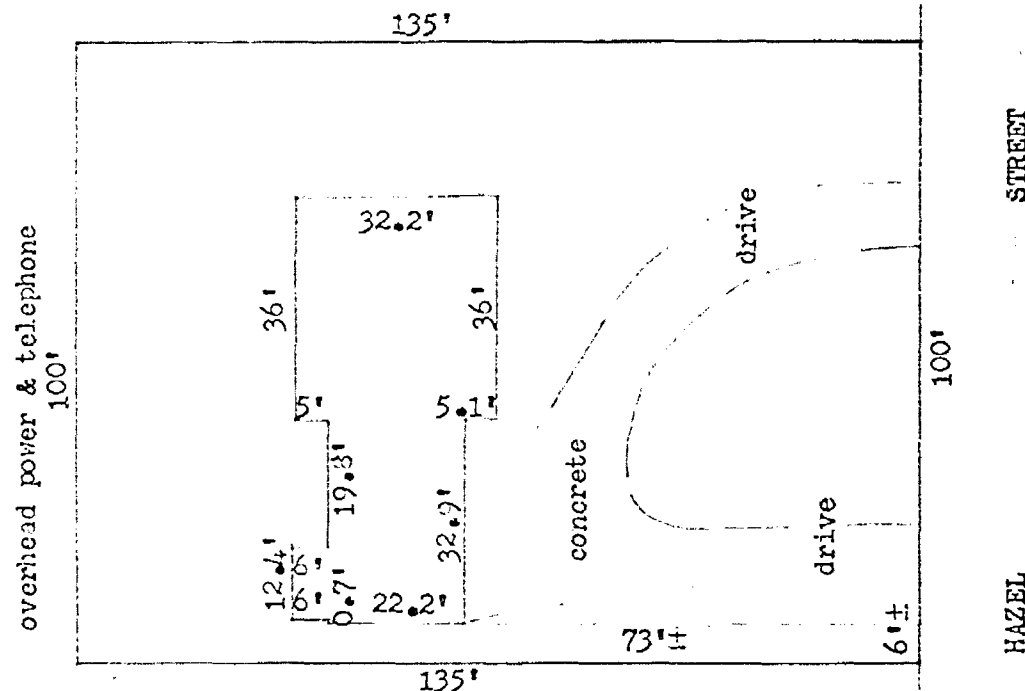

The South One Hundred (100) feet, front and rear, of the North One Hundred Ninety (190) feet, front and rear, of the East One Hundred Thirty-five (135) feet, of that part of the North East 1/4 of the SOUTH EAST 1/4 of Section Thirteen (13) Township Eighteen (18) North, of Range Sixteen (16) East, in the Eleventh Ward, City of Oshkosh, lying south of the South line of Baldwin Street and west of the West line of Hazel Street.

CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.



THERE ARE NO BUILDING ENCROACHMENTS.  
HOUSE IS A TWO STORY WITH ATTACHED GARAGE.  
FOGUE - 1033 HAZEL STREET

I, ROBERT F. REIDER  
certify that this mortgage inspection was made by me or under my direction and control of the described property on, MARCH 13, 1987, according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. FIRST GIBRALTAR MORT. CO. in agreement with Carow Land Surveying Co., Inc. has waived parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: First Gibraltar Mortgage Co.

REVISIONS	FIRST GIBRALTAR MORTGAGE CO. 54 PARK PLACE, APPLETON, WISCONSIN 54915 CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
	DRAWN BY ec dw RFR	SCALE 1"=30'	DRAWING NO. 873.99
	APP'D LEC	DATE 3-13-87	

## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys

A-E 5.02 U.S. public land survey monument record

A-E 5.01 Minimum standards for property surveys. (1) **SCOPE.** The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) **PROPERTY SURVEY, DEFINITION.** In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) **BOUNDARY LOCATION.** Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) **DESCRIPTIONS.** Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 5

(5) **MAPS.** A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) **MEASUREMENTS.** (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) **MONUMENTS.** The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (a) and (6) (e), Register, June, 1978, No. 234, eff. 7-1-78; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and f. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) **WHEN MONUMENT RECORD REQUIRED.** A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320



# PLAT OF SURVEY


FOR: ELAINE HODREN

KNOWN AS 910 GROVE STREET. BEING LOT 27 IN BLOCK "B" OF G.L. MADISON'S NORTH PARK ADDITION, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

○ ——— DENOTES 3/4" X 24" IRON ROD SET.  
( ) ——— DENOTES RECORDED DIMENSION.

SCALE 1" = 30'

GROVE STREET 66ft.

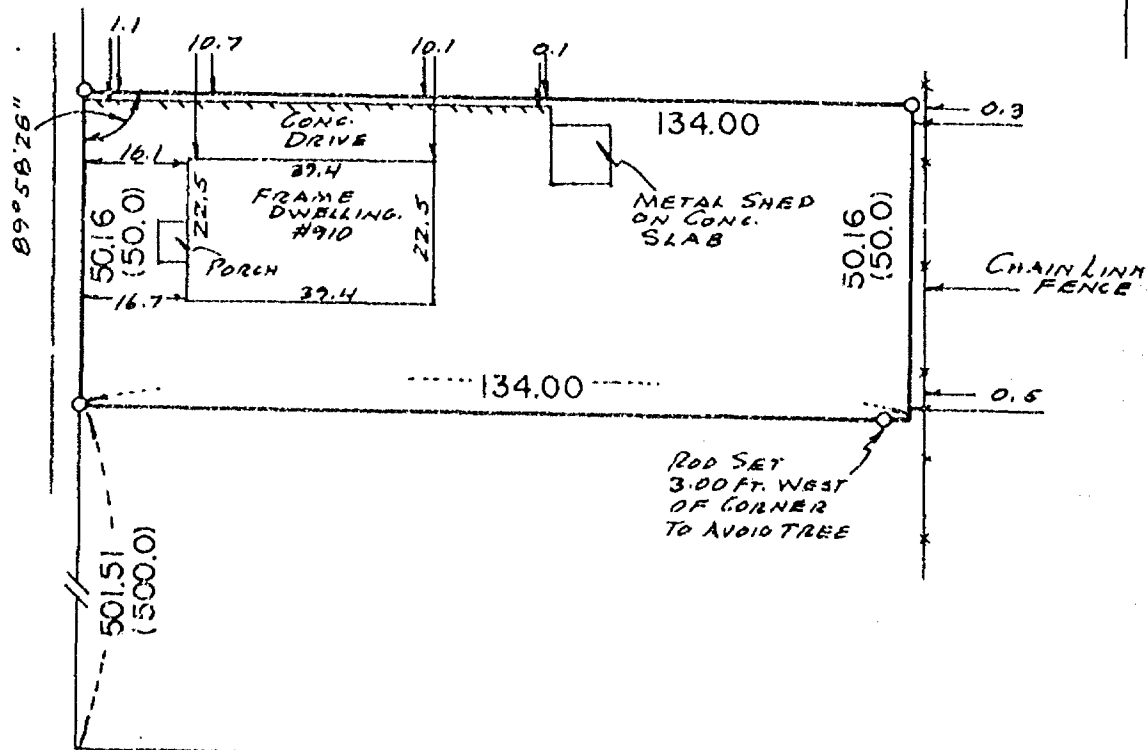

EAST LINCOLN AVENUE



STATE OF WISCONSIN  
COUNTY OF WINNEBAGO

I do hereby certify that I have surveyed the property described above according to official records, and that the plat above drawn is a correct representation of said survey

OSHKOSH, WIS.

5-18-87  
*Reinhard H.W. Roehrig*  
REGISTERED LAND SURVEYOR

SCHULER & ASSOCIATES

APPLETON, WIS. (734-9107)  
OSHKOSH, WIS. (426-2600)

DWG. LB7-1040



## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys. A-E 5.02 U.S. public land survey monument record.

A-E 5.01 Minimum standards for property surveys. (1) Scope. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) PROPERTY SURVEY, DEFINITION. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) BOUNDARY LOCATION. Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) DESCRIPTIONS. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1962, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 6

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) MEASUREMENTS. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 272, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; (1) (b) and c. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320

# PLAT OF SURVEY


KNOWN AS 1243 MERRITT AVENUE, BEING THE WEST 15.0 FT. OF LOT 26 AND THE EAST 35.0 FT. OF LOT 25, IN BLOCK 37 OF EVANS ADDITION, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

JANUARY 18, 1985

SURVEY FOR FIRST SAVINGS  
APPLICANT: LAWRENCE PASQUINI  
MONUMENT WAIVER ON FILE

SURVEY NO. 1591-M

( ) = RECORD DIMENSIONS WHERE DIFFERENT FROM FIELD MEASUREMENTS.

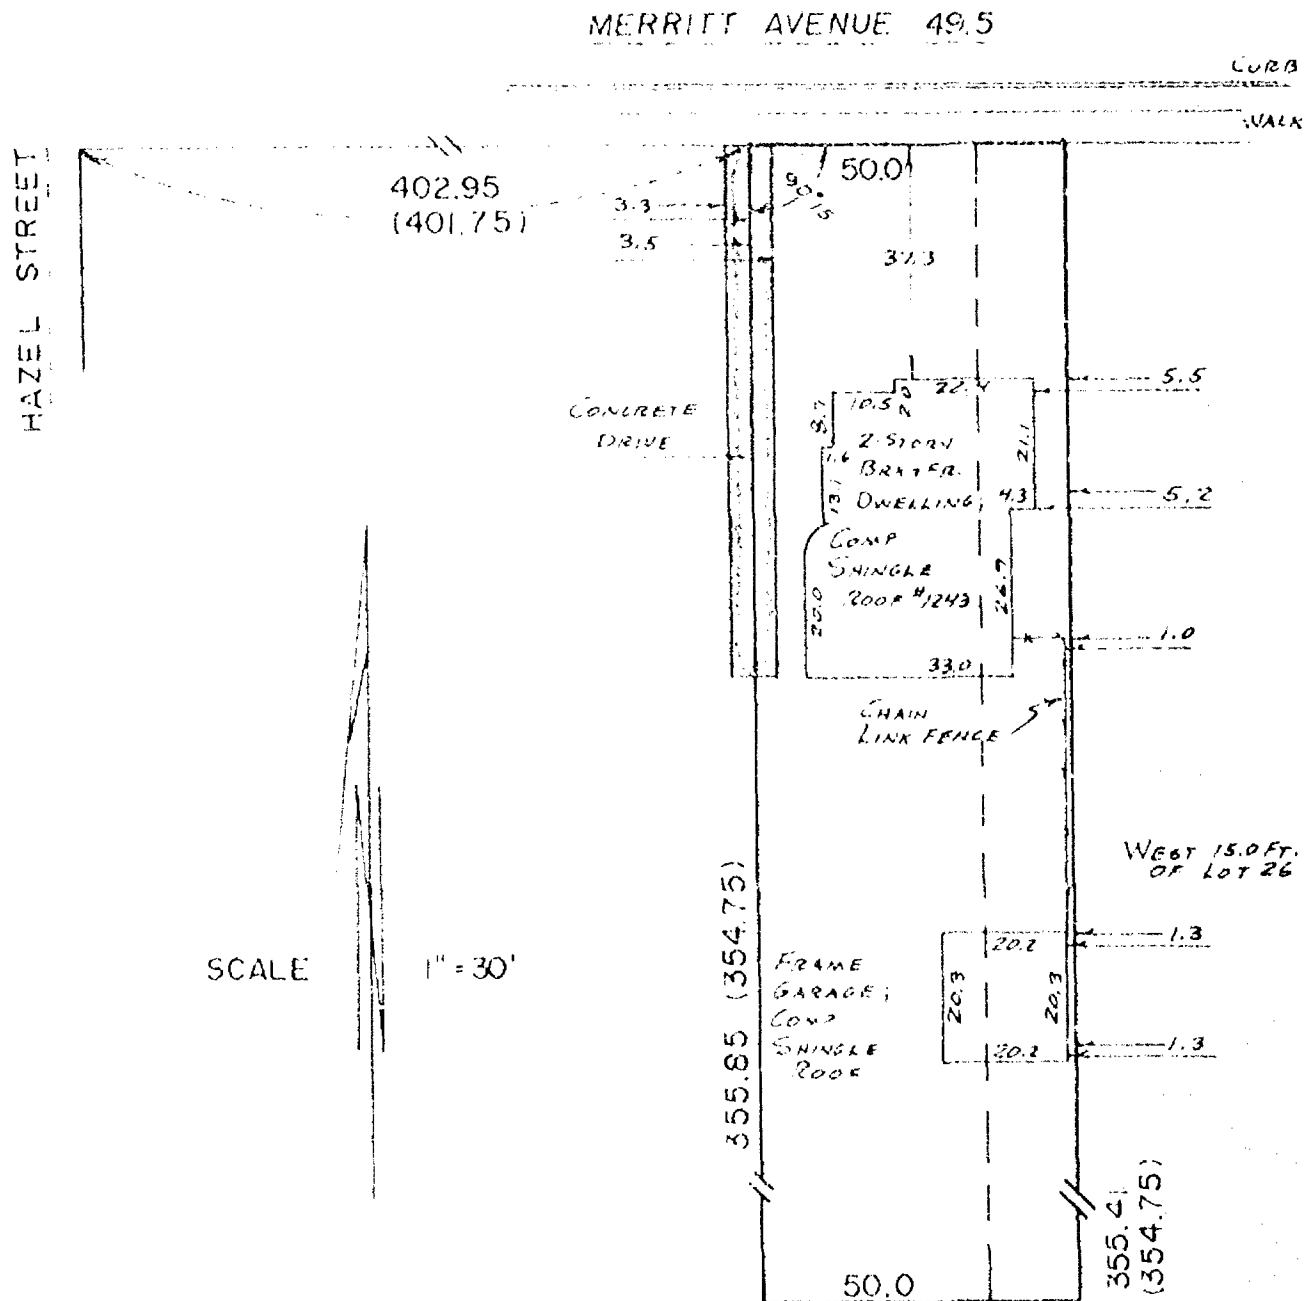


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.




**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 428-2800

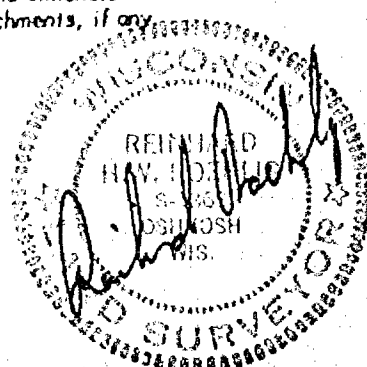


BOYD STREET

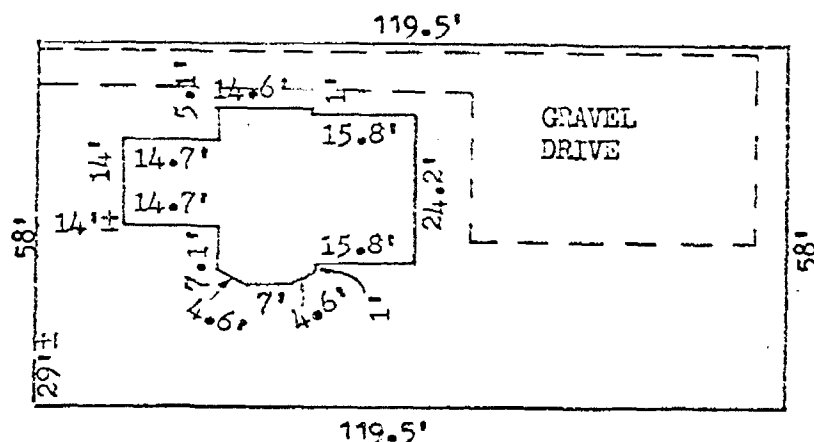

2 STORY HOUSE

Robert F. Reider

certify that this mortgage inspection was made by me or under my direction and control of the described property on, JULY 28, 1986, according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. Oshkosh Savings & Loan in agreement with Carow Land Surveying Co., Inc. has waived parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: Oshkosh Savings & Loan.

REVISIONS	Oshkosh Savings & Loan P.O. Box 80. Oshkosh, Wis. 54902		DRAWING NO. 867-236	
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912			
	DRAWN BY mv-dv MV	SCALE 1"=30'		
	APPD X	DATE 7-28-86		



## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys      A-E 5.02 U.S. public land survey monument record

A-E 5.01 Minimum standards for property surveys. (1) **SCOPE.** The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) **PROPERTY SURVEY, DEFINITION.** In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) **BOUNDARY LOCATION.** Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) **DESCRIPTIONS.** Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 4

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) **MEASUREMENTS.** (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) **MONUMENTS.** The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (c) and (5) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and r. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) **WHEN MONUMENT RECORD REQUIRED.** A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320


# PLAT OF SURVEY

KNOWN AS 504 GEHRES COURT, BEING LOT 34 IN PRECOURT ASSESSOR'S PLAT,  
IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

NOVEMBER 4, 1985

SURVEY NO. 1672-M

SURVEY FOR FIRST FINANCIAL SAVINGS  
MONUMENT WAIVED ON FILE  
APPLICANT: STEPHEN S. FRIEHEIT

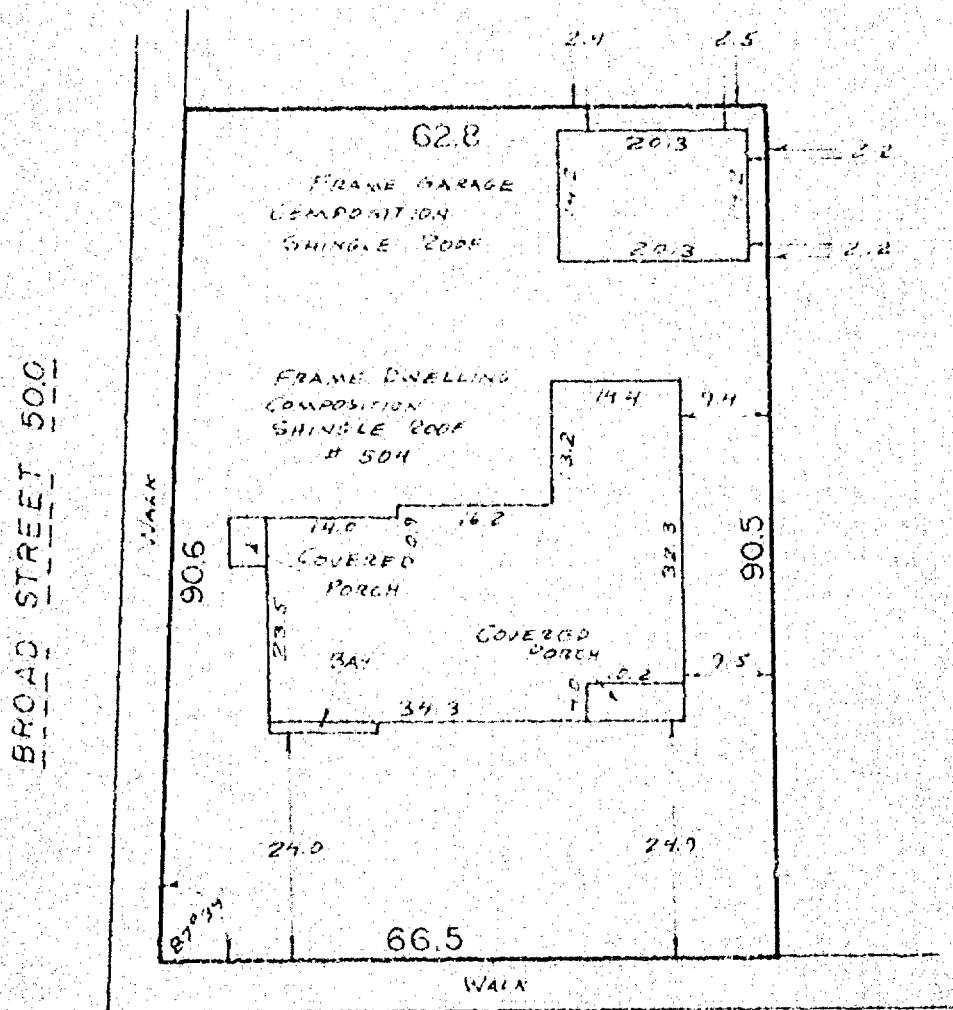


SCALE 1"=20'

GEHRES COURT 50.0

I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**  
417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

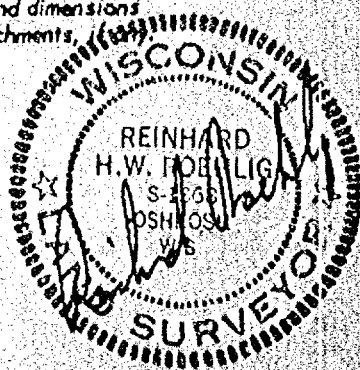



# PLAT OF SURVEY


KNOWN AS 637 BOWEN STREET, BEING LOT 29 IN THE REPLAT OF BLOCK 62, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

MAY 13, 1985

SURVEY FOR DONALD DAVIES

SURVEY NO. 1617-S

( ) = RECORD DIMENSIONS WHERE DIFFERENT FROM FIELD MEASUREMENTS.

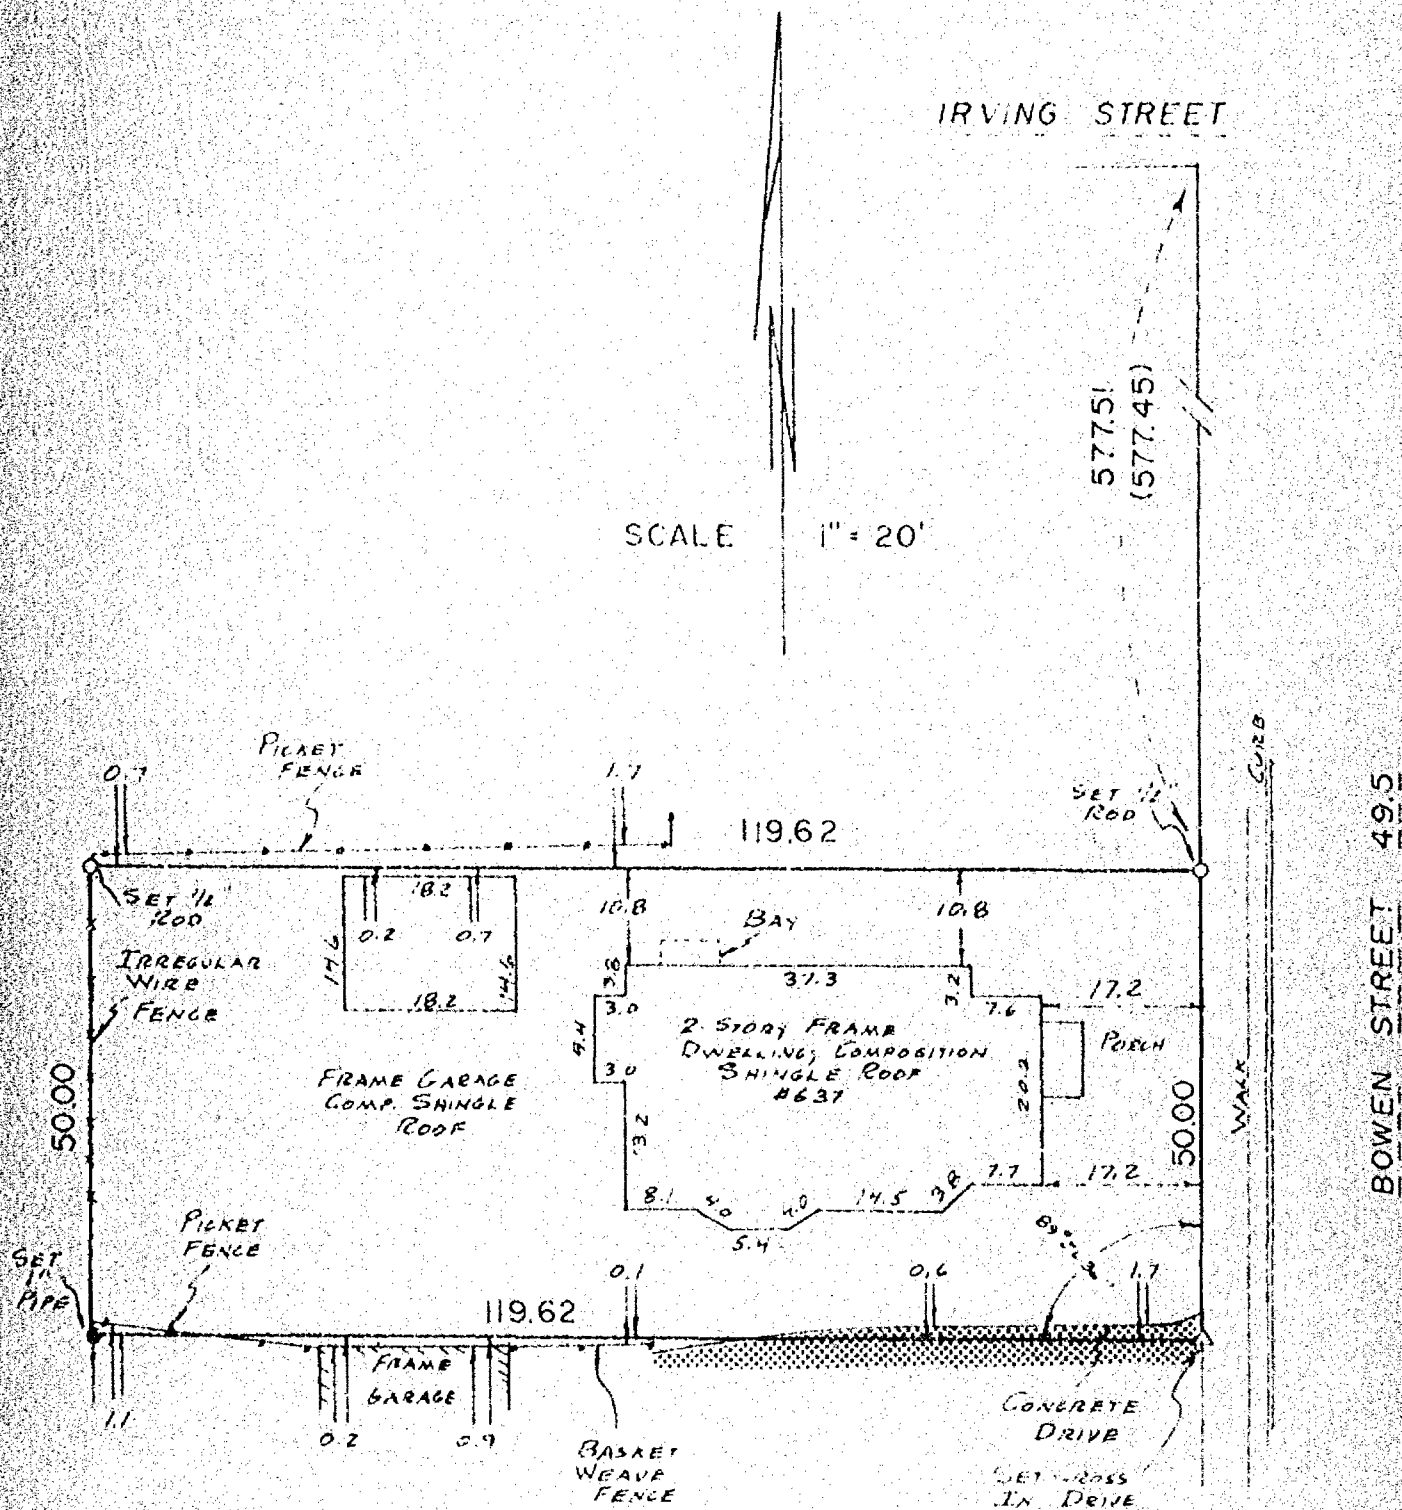


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title, thereo, within one (1) year from date hereof.




**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

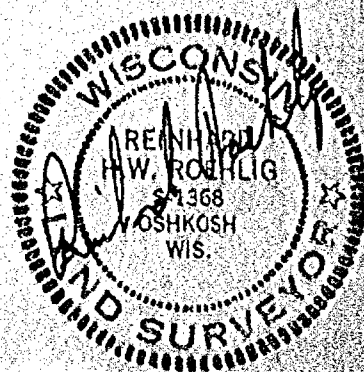



IRON PIPE IS 0.1' EAST OF ACTUAL CORNER  
LOT AS SURVEYED BY R.F. WOLVERTON DATED FEBRUARY 27, 1937.

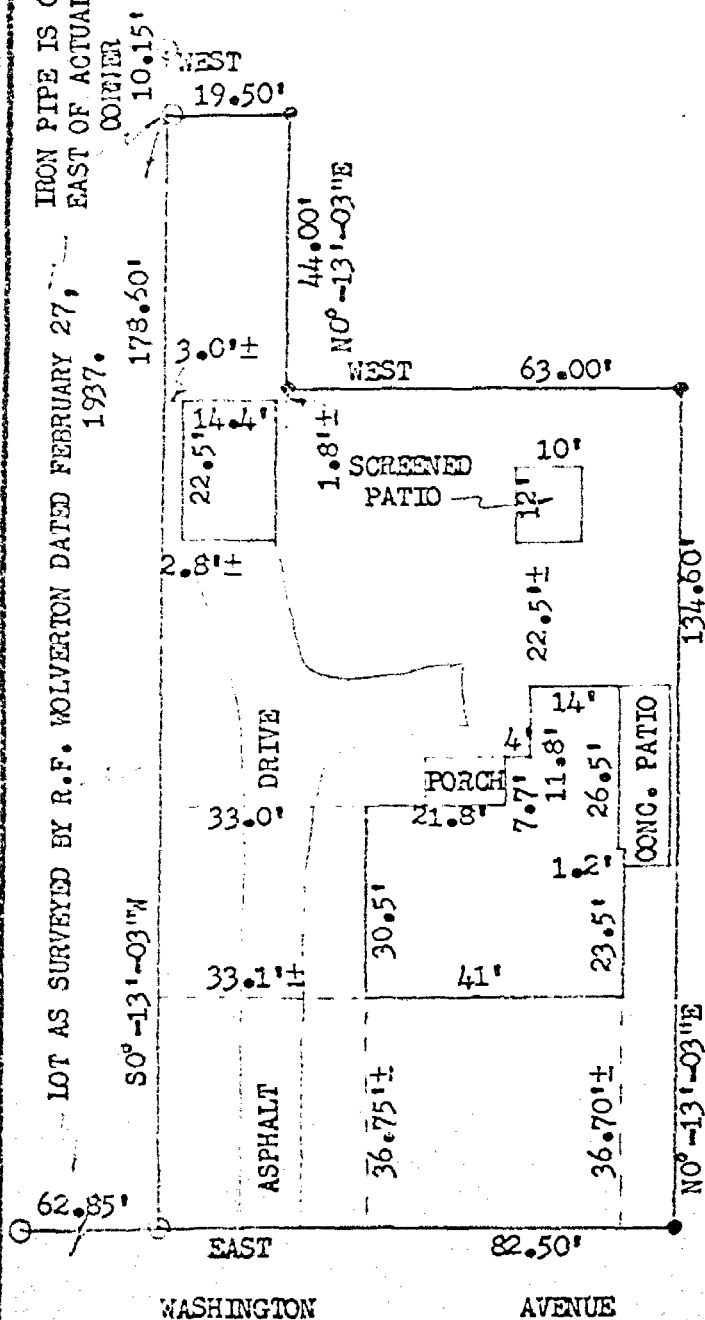

# DESCRIPTION:

The West 1/4 of Lot Thirty (30) of Block Thirty-seven (37) in EVAN'S ADDITION, in the Eleventh Ward, City of Oshkosh, per Leach's Map of 1894, excepting therefrom the North One Hundred Twenty (120) feet thereof, and also excepting therefrom the Easterly Sixty-three (63) feet of the Northerly Forty-four (44) feet thereof. ALL IN WINNEBAGO COUNTY, WISCONSIN.

THERE ARE NO BUILDING ENCROACHMENTS.

HOUSE IS A STORY AND ONE HALF.

WARREN - 1318 WASHINGTON AVENUE

## LEGEND

○ = 1" IRON PIPE FOUND

● = 3/4" x 24" SOLID ROUND #6 REBAR SET




I, ROBERT F. REIDER, CERTIFY THAT THIS PLAT OF SURVEY IS A CORRECT REPRESENTATION OF THE PROPERTY DESCRIBED AND PRESENT BUILDINGS THEREON.

*Robert F. Reider*  
ROBERT F. REIDER, RLS-1251

*8-14-85*  
DATED

REVISIONS	FIRST WISCONSIN REAL ESTATE SERVICE 3019 W. SPENCER ST., APPLETON, WIS. 54914		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
	DRAWN BY RT KV RFR	SCALE 1"=30'	DRAWING NO.
	APPD LEC	DATE 8-14-85	A858.144

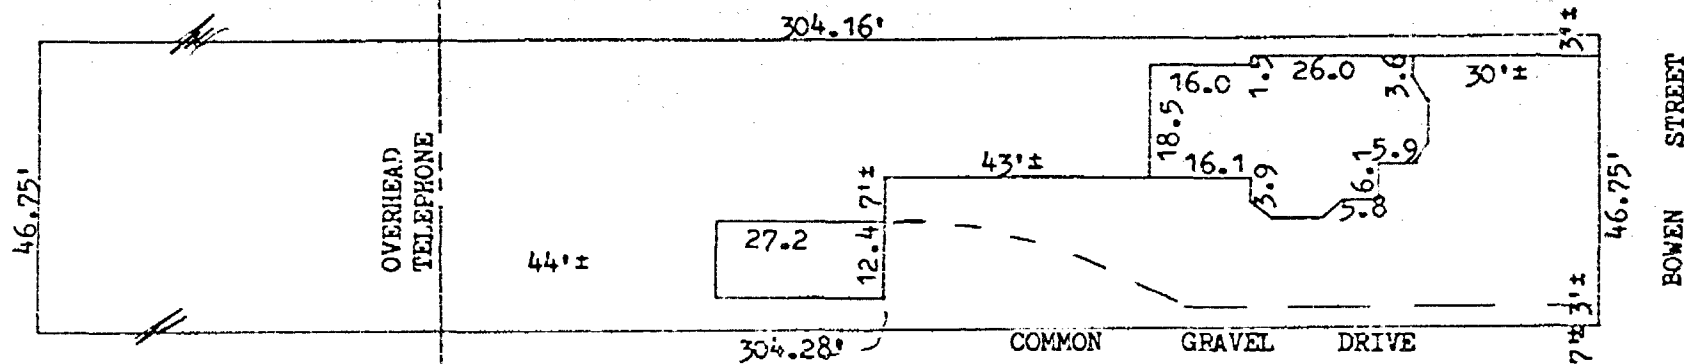

DESCRIPTION:  
ALL OF LOT 42, BLOCK 5, CITYS REPLAT NUMBER 4,  
11th WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY,  
WISCONSIN.



TWO STORY HOUSE

NO BUILDING ENCROACHMENTS PRESENT

BOSS - 741 BOWEN STREET

I, THOMAS F. HALVERSON

certify that this mortgage inspection was made by me or  
under my direction and control of the described property on,

APRIL 29, 1985

, according to the official records  
and that this drawing is a true representation of the  
principal building lines thereon and is accurate to the  
best of my knowledge and belief. Oshkosh Savings & Loan  
in agreement with Carow Land Surveying Co., Inc. has  
waivered parts of Administrative Code A-E 5.01 (3 through 7).  
THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE.

THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF:

Oshkosh Savings & Loan.

*Thomas F. Halverson*

4-29-85

REVISIONS	Oshkosh Savings & Loan		
	P.O. Box 80, Oshkosh, Wis. 54902		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297		
	1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
DRAWN BY	rr-ec	TFH	SCALE
APPD			1"=30'
			DATE 4-29-85
			DRAWING NO. 854.161



## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys

A-E 5.02 U.S. public land survey monument record

A-E 5.01 Minimum standards for property surveys. (1) **SCOPE.** The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) **PROPERTY SURVEY, DEFINITION.** In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) **BOUNDARY LOCATION.** Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) **DESCRIPTIONS.** Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 4

(5) **MARS.** A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) **MEASUREMENTS.** (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.



(7) **MONUMENTS.** The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (5), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and c. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) **WHEN MONUMENT RECORD REQUIRED.** A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320

DESCRIPTION: THAT PART OF FRACTIONAL LOT TWO (2), OF SECTION NINETEEN (19) TOWNSHIP EIGHTEEN (18) NORTH, OF RANGE SEVENTEEN (17) EAST, IN THE ELEVENTH WARD, CITY OF OSHKOSH, DESCRIBED AS FOLLOWS: COMMENCING ON THE NORTH LINE OF MERRITT AVENUE AT A POINT SIXTY (60) FEET EAST OF THE SOUTHEAST CORNER OF LOT TWO (2) OF THE SUBDIVISION OF THAT PART OF SAID FRACTIONAL LOT TWO (2) LYING NORTH OF THE NORTH LINE OF MERRITT AVE. AS PER PALMER'S MAP, THENCE EAST ALONG THE NORTH LINE OF SAID MERRITT AVENUE, SIXTY (60) FEET; THENCE NORTH, PARALLEL WITH THE EAST LINE OF HAZEL STREET, ONE HUNDRED TWENTY EIGHT (128) FEET; THENCE WEST, PARALLEL WITH THE NORTH LINE OF MERRITT STREET, SIXTY (60) FEET; THENCE SOUTH ONE HUNDRED TWENTY EIGHT (128) FEET, TO THE PLACE OF BEGINNING. ALL BEING IN WINNEBAGO COUNTY, WISCONSIN.

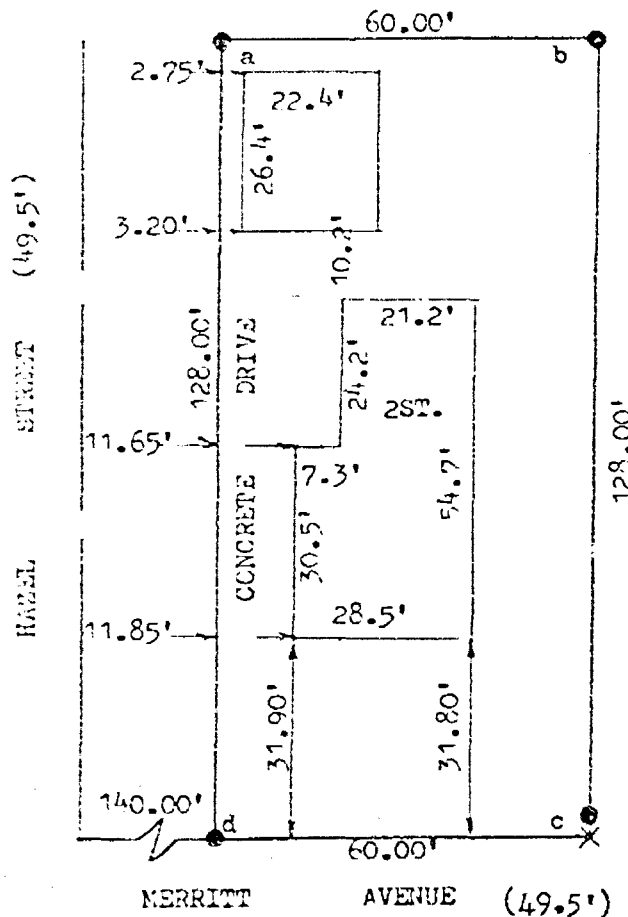

STEPHAN J. & NAN E. ADAMS  
1216 MERRITT AVE.  
OSHKOSH, WISCONSIN.

ANGLES:  
a=90°-26'-40"  
b=89°-33'-20"  
c=90°-26'-40"  
d=89°-33'-20"

● = 3/4"x24" SOLID ROUND IRON REBAR SET  
X = CHISELED CROSS SET IN CONCRETE WALK

*Michael D. Vander Bloomen*

9-24-85

I, MICHAEL D. VANDER BLOOMEN, CERTIFY THAT THIS PLAT OF SURVEY IS A CORRECT REPRESENTATION OF THE ABOVE DESCRIBED PROPERTY.

REVISIONS	OSHKOSH SAVINGS & LOAN P.O. BOX 80, OSHKOSH, WISCONSIN 54902-0080		
	CAROW LAND SURVEYING CO., INC. P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
DRAWN BY MV-ec MV	SCALE 1"=30'	DRAWING NO. A859-190	
APP'D	DATE 9-24-85		



## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys. A-E 5.02 U.S. public land survey monument record.

A-E 5.01 Minimum standards for property surveys. (1) Scope. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) PROPERTY SURVEY, DEFINITION. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) BOUNDARY LOCATION. Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) DESCRIPTIONS. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 5

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) MEASUREMENTS. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.


(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.


History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and c. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320

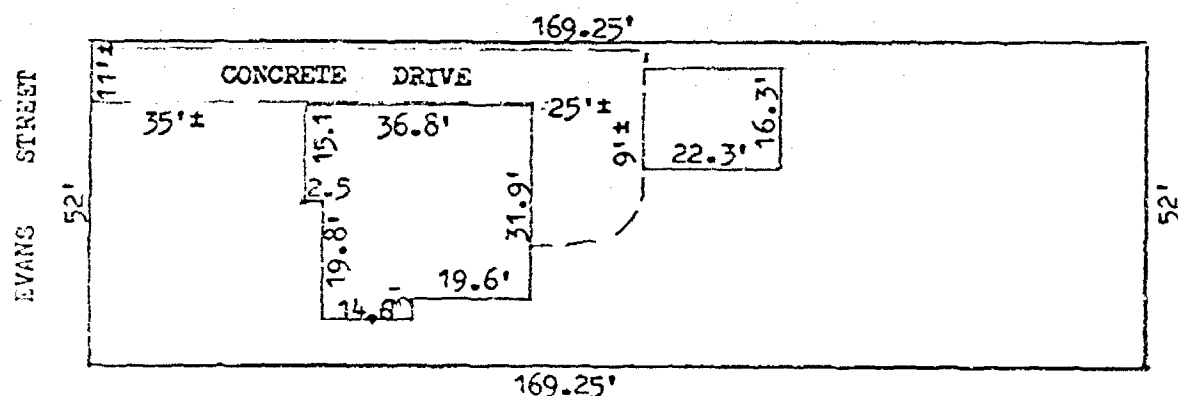

DESCRIPTION: LOT 7, BLOCK 1, CITY REPLAT #4, ELEVENTH WARD,  
CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.



*Robert F. Reider*

NO BUILDING ENCROACHMENTS PRESENT

STREICHER: 830 EVANS ST.  
OSHKOSH, WISCONSIN.

I, ROBERT F. REIDER

certify that this mortgage inspection was made by me or  
under my direction and control of the described property on,  
AUGUST 30, 1985, according to the official records  
and that this drawing is a true representation of the  
principal building lines thereon and is accurate to the  
best of my knowledge and belief. Oshkosh Savings & Loan  
in agreement with Carow Land Surveying Co., Inc. has  
waivered parts of Administrative Code A-E 5.01 (3 through 7).  
THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE.  
THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF:  
Oshkosh Savings & Loan.

REVISIONS	Oshkosh Savings & Loan P.O. Box 80, Oshkosh, Wis. 54902		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1937 W. WISCONSIN AVE. • APPLETON, WI 54912		
DRAWN BY	SCALE	DRAWING NO.	
ky-dv MV	1"=30'	858.325	
APP'D	DATE	8-30-85	

## Chapter A-E 5

## MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys      A-E 5.02 U.S. public land survey monument record

A-E 5.01 Minimum standards for property surveys. (1) **SCOPE.** The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) **PROPERTY SURVEY, DEFINITION.** In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) **BOUNDARY LOCATION.** Every property survey should be made in accordance with the records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) **DESCRIPTIONS.** Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

Note: Items not underlined have been waived.

## WISCONSIN ADMINISTRATIVE CODE

A-E 5

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) **MEASUREMENTS.** (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) **MONUMENTS.** The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1976, No. 234, eff. 7-1-75; nom. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and f. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (i) **WHEN MONUMENT RECORD REQUIRED.** A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320




638403

*John*

Register's Office  
Winnebago County, Wis.  
Received for record this *23<sup>rd</sup>*  
day of *Sept.* A.D., 19*85*  
at *1:20* o'clock *P*.M. and  
recorded in Vol. *1* of *CSM*  
on page *1448*.  
*Margaret Johnson*  
Register of Deeds


*P1 w  
6*

I, Ronald A. Dercks, Wisconsin Registered Land Surveyor of Aero-Metric Engineering, Inc., certify that I have surveyed, divided and mapped under the direction of Hank Nofke a part of Lot Three (3) of Block Ninety-nine (99) in the Eleventh (11th) Ward, City of Oshkosh, Per Leach's Map of 1894, and now in the Fifteenth (15th) Ward, City of Oshkosh, Winnebago County, Wisconsin containing 27,595.8 square feet of land and being described by: Commencing at the intersection of the West line of Bowen Street, as now located, with the North line of Nevada Avenue, as now located, being the true point of beginning; thence N.89°-59'-41"W. 120.00 feet along the North line of Nevada Avenue; thence N.00°-00'-00"E. 139.00 feet, parallel with the West line of Bowen Street; thence S.89°-59'-41"E. 5.00 feet, parallel with the North line of Nevada Avenue; thence N.00°-00'-00"E. 94.92 feet, parallel to the West line of Bowen Street to its intersection with the North line of said Lot 3; thence S.89°-59'-41"E. 115.00 feet along the North line of said Lot 3 to its intersection with the West line of Bowen Street; thence S.00°-00'-00"W. 233.92 feet along the West line of Bowen Street to the true point of beginning.

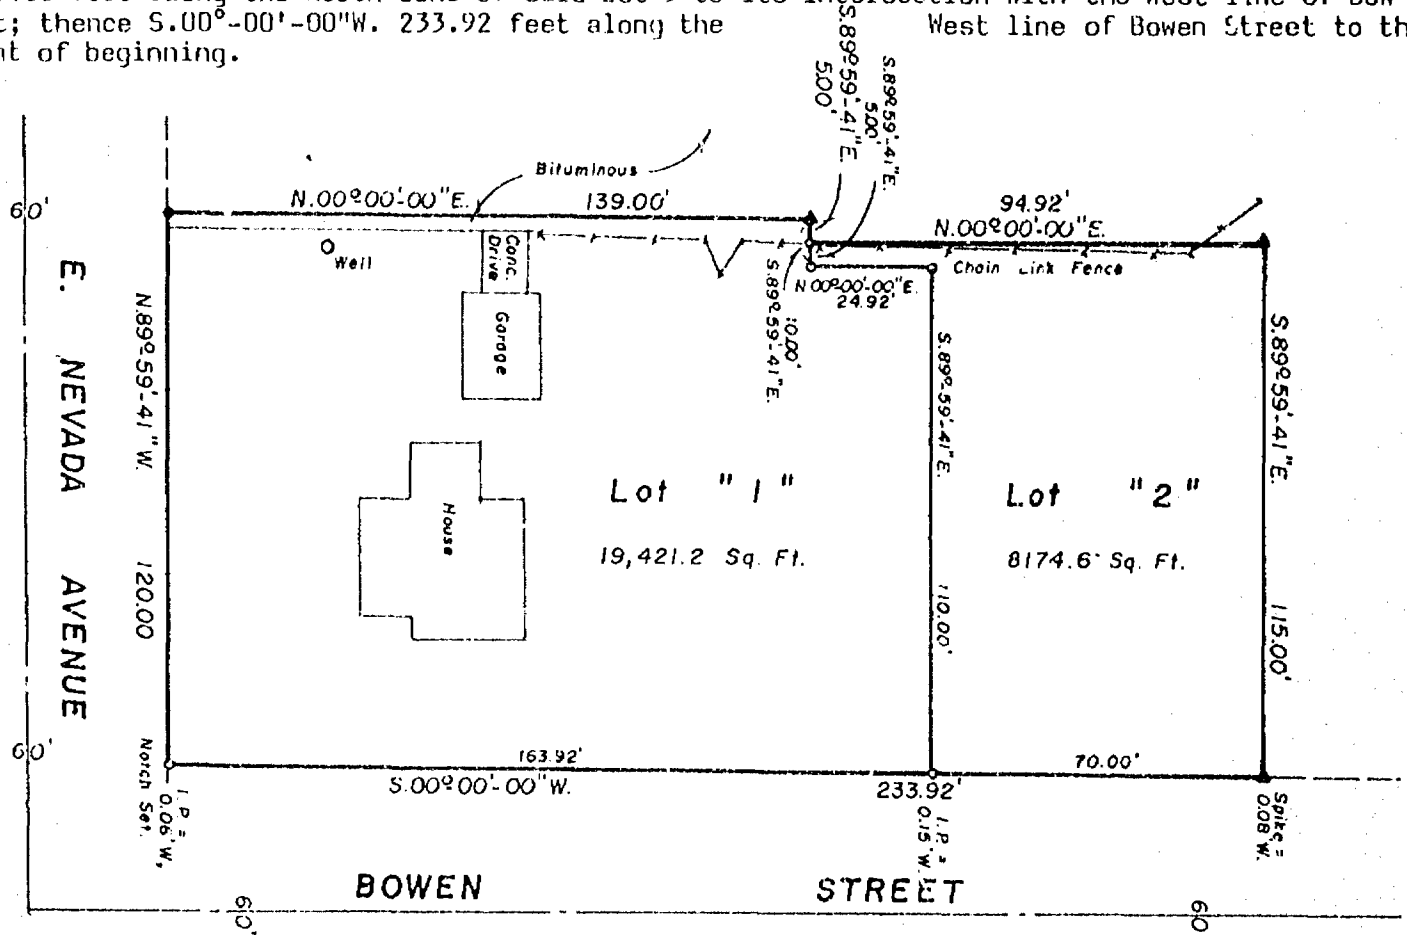


**Legend**

- = 1"x24" Iron Pipe Weighing 1.68 lbs / Lineal Foot Set.
  - ▲ = Railroad Spike Set.
  - = 3/4" Iron Pipe Found.
- Date: August 28, 1985  
Nb. 87 Pg 69-71




Dated this 28th day of August, 1985

Ronald A. Dercks  
Wisconsin Registered Land Surveyor S-1615

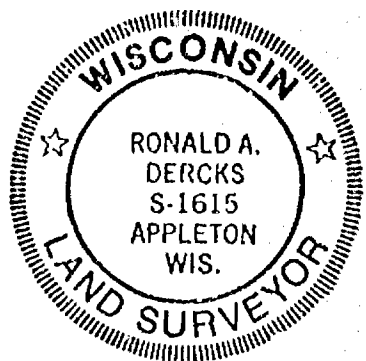

Aero - Metric Engineering, Inc.  
539 North Madison Street  
Chilton Wisconsin 53014




STATE OF WISCONSIN )  
WINNEBAGO COUNTY ) SS

That such is a correct representation of all exterior boundaries of the land surveyed.  
That I have fully complied with the provisions of Chapter 236.34 of the Wisconsin Statutes and the Land Subdivision Ordinance of the City of Oshkosh in surveying and mapping the same.

Dated this 23rd day of August, 1985.

Ronald A. Dercks  
Wisconsin Registered Land Surveyor S-1615  
Ronald A. Dercks

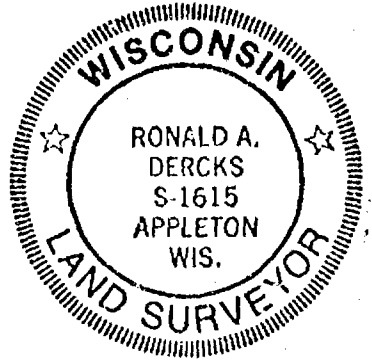

OWNER'S CERTIFICATE

As owner, I hereby certify that I caused the land described on this Certified Survey Map to be surveyed, divided, and mapped as represented on this map.

Dated this 23rd day of Sept., 1985.

In the Presence of:

[Signature]

[Signature]  
Marie A. Nofke

[Signature]

STATE OF WISCONSIN )  
WINNEBAGO COUNTY ) SS

Personally came before me this 23rd day of Sept., 1985, the above named Marie A. Nofke to me known to be the person who executed the foregoing instrument and acknowledged the same.



Barbara A. Murphy  
Notary Public, Winnebago City, Wisconsin  
My Commission expires 6-15-86

CITY PLANNING COMMISSION CERTIFICATE:


This Certified Survey Map of a part of Lot 3, Block 99, in the 11th Ward, City of Oshkosh, Per Leach's Map of 1894 and now in the 15th Ward, City of Oshkosh, Marie A. Nofke, owner, is hereby approved.

Date 9/20/85

[Signature]  
Bruce Roskam  
Secretary of Planning Commission


**SURVEYOR'S CERTIFICATE:**

I, Ronald A. Dercks, Wisconsin Registered Land Surveyor of Aero-Metric Engineering, Inc., certify that I have surveyed, divided and mapped under the direction of Hank Nofke a part of Lot Three (3) of Block Ninety-nine (99) in the Eleventh (11th) Ward, City of Oshkosh, Per Leach's Map of 1894, and now in the Fifteenth (15th) Ward, City of Oshkosh, Winnebago County, Wisconsin containing 27,595.8 square feet of land and being described by: Commencing at the intersection of the West line of Bowen Street, as now located, with the North line of Nevada Avenue, as now located, being the true point of beginning; thence N.89°-59'-41"W. 120.00 feet along the North line of Nevada Avenue; thence N.00°-00'-00"E. 139.00 feet, parallel with the West line of Bowen Street; thence S.89°-59'-41"E. 5.00 feet, parallel with the North line of Nevada Avenue; thence N.00°-00'-00"E. 94.92 feet, parallel to the West line of Bowen Street to its intersection with the North line of said Lot 3; thence S.89°-59'-41"E. 115.00 feet along the North line of said Lot 3 to its intersection with the West line of Bowen Street; thence S.00°-00'-00"W. 233.92 feet along the West line of Bowen Street to the true point of beginning.

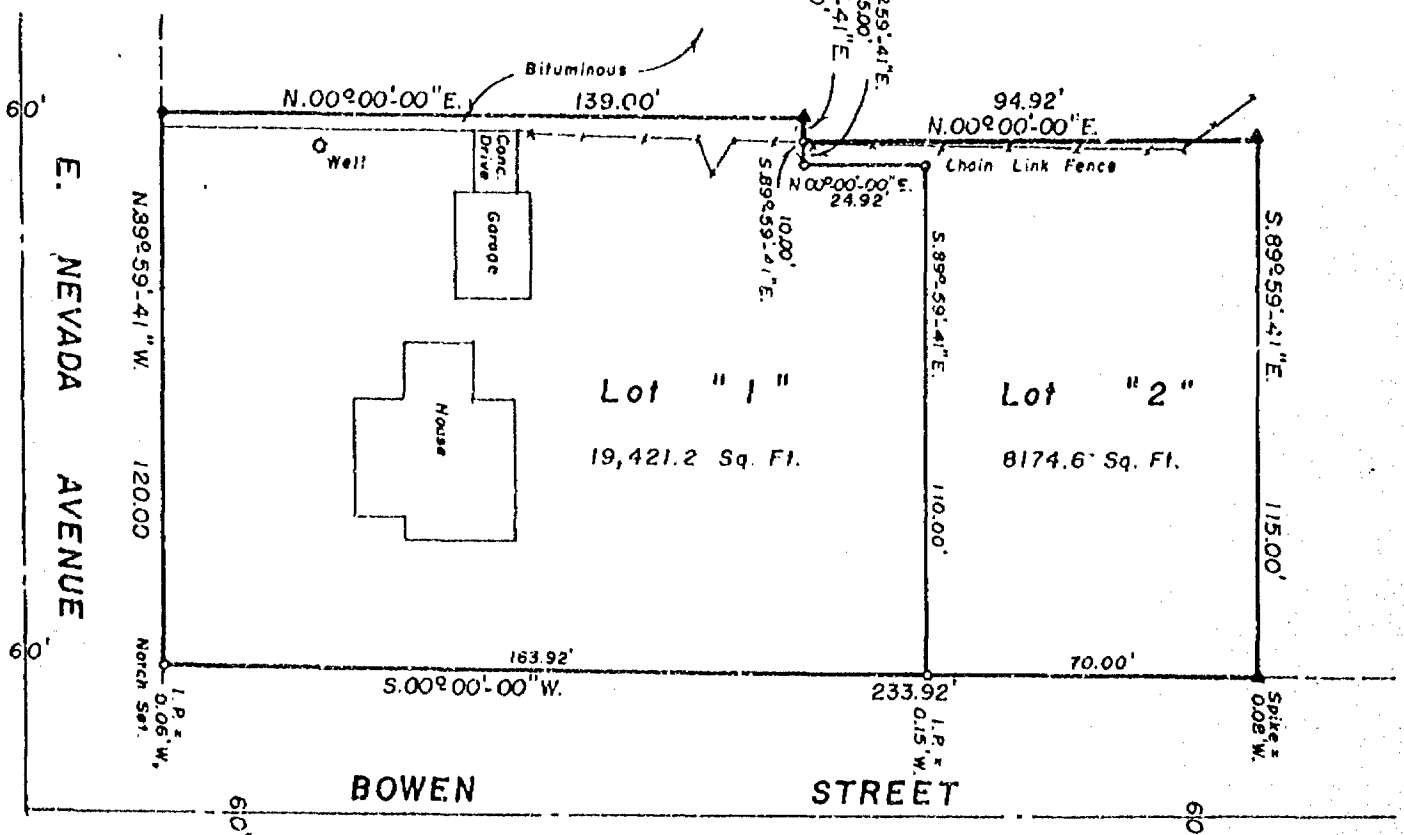

**Legend**

- = 1"x24" Iron Pipe Weighing 1.68 lbs / Lineal Foot Set.
  - ▲ = Railroad Spike Set.
  - = 3/4" Iron Pipe Found.
- Date: August 28, 1985  
Nb. 87 Pg 69-71




Dated this 28th day of August, 1985

Ronald A. Dercks  
Wisconsin Registered Land Surveyor S-1615



Aero - Metric Engineering, Inc.  
539 North Madison Street  
Chilton Wisconsin 53014




STATE OF WISCONSIN )  
WINNEBAGO COUNTY ) SS

That such is a correct representation of all exterior boundaries of the land surveyed.  
That I have fully complied with the provisions of Chapter 236.34 of the Wisconsin Statutes and the Land Subdivision Ordinance of the City of Oshkosh in surveying and mapping the same.

Dated this 28TH day of August, 1985.

Ronald A. Dercks  
Wisconsin Registered Land Surveyor S-1615  
Ronald A. Dercks

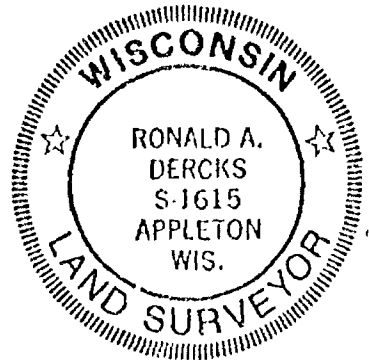

OWNER'S CERTIFICATE

As owner, I hereby certify that I caused the land described on this Certified Survey Map to be surveyed, divided, and mapped as represented on this map.

Dated this \_\_\_\_\_ day of \_\_\_\_\_, 1985.

In the Presence of:

\_\_\_\_\_  
Marie A. Nofke

STATE OF WISCONSIN )  
WINNEBAGO COUNTY ) SS

Personally came before me this \_\_\_\_\_ day of \_\_\_\_\_, 1985, the above named Marie A. Nofke to me known to be the person who executed the foregoing instrument and acknowledged the same.

\_\_\_\_\_  
Notary Public, \_\_\_\_\_, Wisconsin

My Commission expires \_\_\_\_\_

CITY PLANNING COMMISSION CERTIFICATE:

This Certified Survey Map of a part of Lot 3, Block 99, in the 11th Ward, City of Oshkosh, Per Leach's Map of 1894 and now in the 15th Ward, City of Oshkosh, Marie A. Nofke, owner, is hereby approved.


Date \_\_\_\_\_

\_\_\_\_\_  
Bruce Roskom  
Secretary of Planning Commission

Winnebago Land Surveying  
511 Baldwin Avenue, Oshkosh, Wisconsin 54901  
Phone (414) 426-4951

## MAP OF SURVEY

LOT 20 AND PART OF LOT 21, CITY'S REPLAT NO. 4, 11TH  
WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN

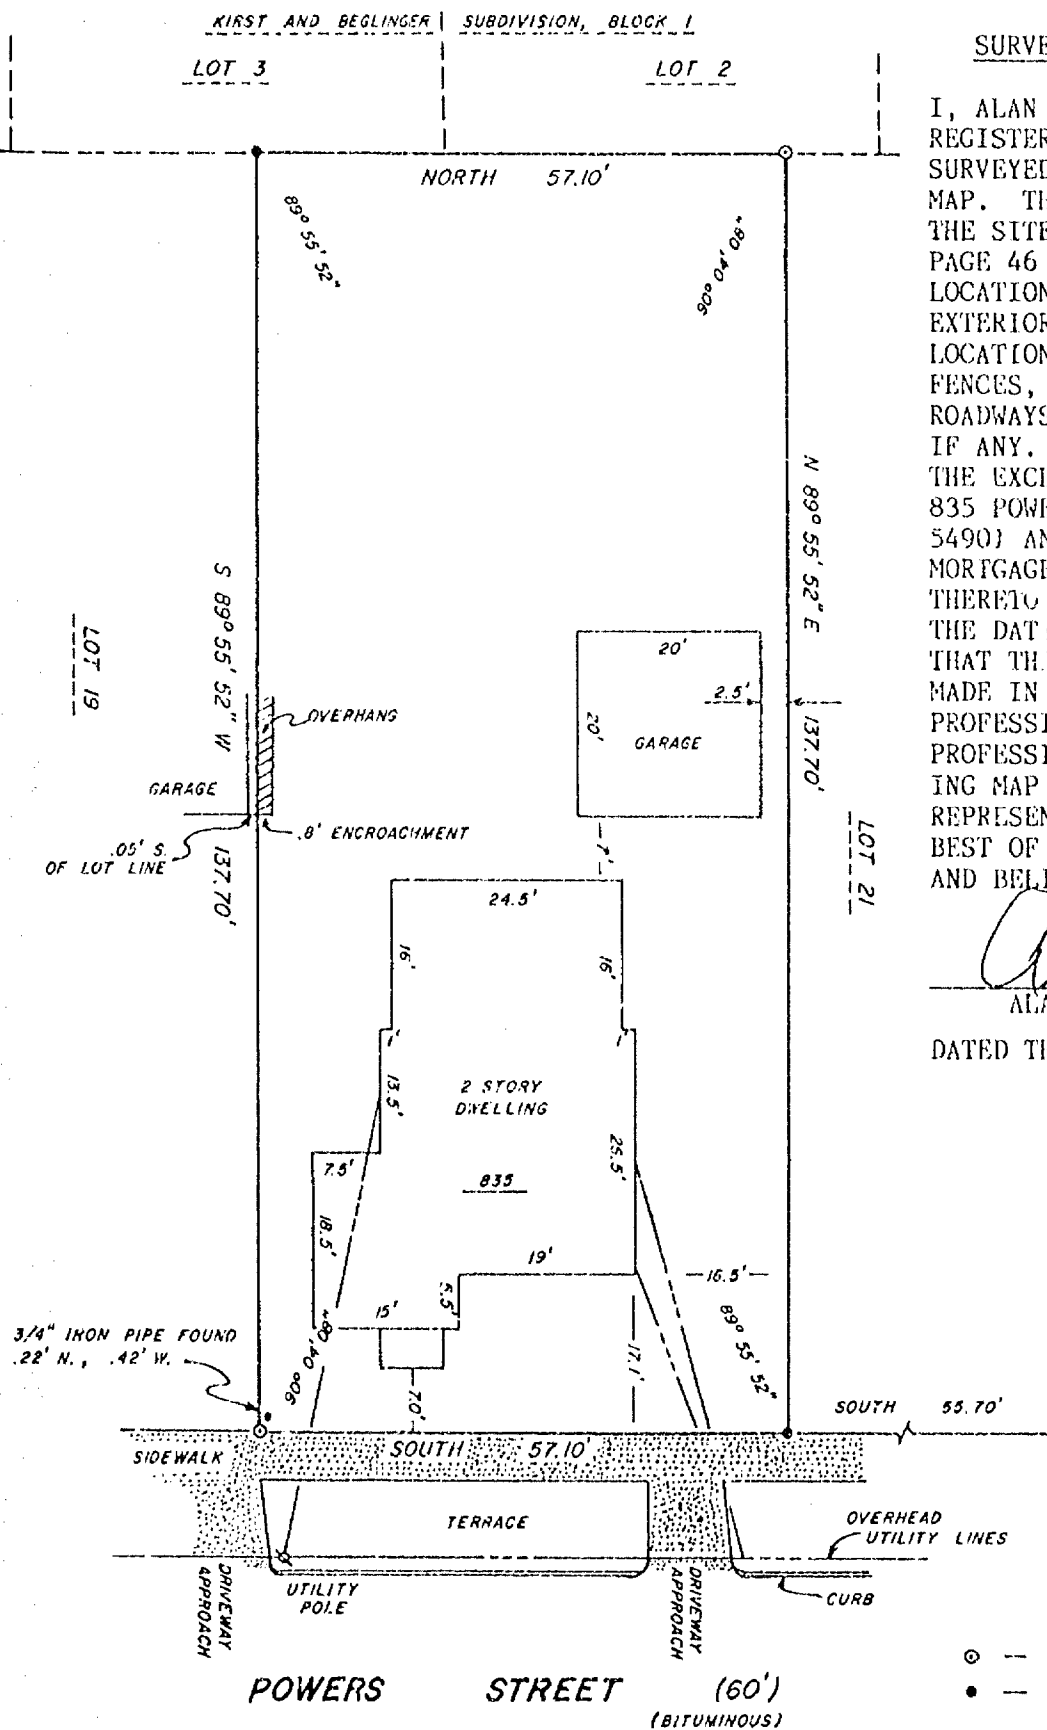

### SURVEYOR'S CERTIFICATE

I, ALAN K. SHUTE, WISCONSIN REGISTERED LAND SURVEYOR, HAVE SURVEYED THE SITE SHOWN ON THIS MAP. THIS SURVEY AND MAP REFLECT THE SITE DESCRIBED IN VOLUME 1308, PAGE 46 AND SHOWS THE SIZE AND LOCATION OF THE PROPERTY, ITS EXTERIOR BOUNDARIES, THE SIZE AND LOCATION OF ALL STRUCTURES THEREON, FENCES, APPARENT EASEMENTS, ROADWAYS AND VISIBLE ENCROACHMENTS IF ANY. THIS SURVEY IS MADE FOR THE EXCLUSIVE USE OF LOUIS VOGEL, 835 POWERS STREET, OSHKOSH, WISCONSIN 54901 AND THOSE WHO PURCHASE, MORTGAGE OR GUARANTEE THE TITLE THEREIN WITHIN ONE (1) YEAR FROM THE DATE HEREOF. TO THEM I CERTIFY THAT THIS SURVEY AND MAP WERE MADE IN ACCORDANCE WITH ACCEPTABLE PROFESSIONAL STANDARDS AND IN MY PROFESSIONAL OPINION THE ACCOMPANYING MAP IS A TRUE AND ACCURATE REPRESENTATION OF THIS SITE TO THE BEST OF MY KNOWLEDGE, INFORMATION AND BELIEF.

*Alan K. Shute*  
ALAN K. SHUTE


S-1518

DATED THIS 1ST DAY OF JULY, 1983



### LEGEND

- ⊙ — 1" X 30" REDAR SET
- — 1" IRON PIPE FOUND



BEARINGS REFERENCED TO THE WEST LINE OF POWERS STREET  
ASSUMED TO BEAR NORTH-SOUTH

E


## PLAT OF SURVEY

KNOWN AS 741 EVANS STREET, BEING LOT 21 IN BLOCK 3 OF CITY REPLAT NO. 4, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN, EXCEPTING THEREFROM THE WEST 14.0 FT. THEREOF.

NOVEMBER 16, 1984


SURVEY FOR OSHKOSH SAVINGS  
APPLICANT: RICHARD TURZENSKI  
MONUMENT: WAIVER ON FILE

SURVEY NO. 1562-M

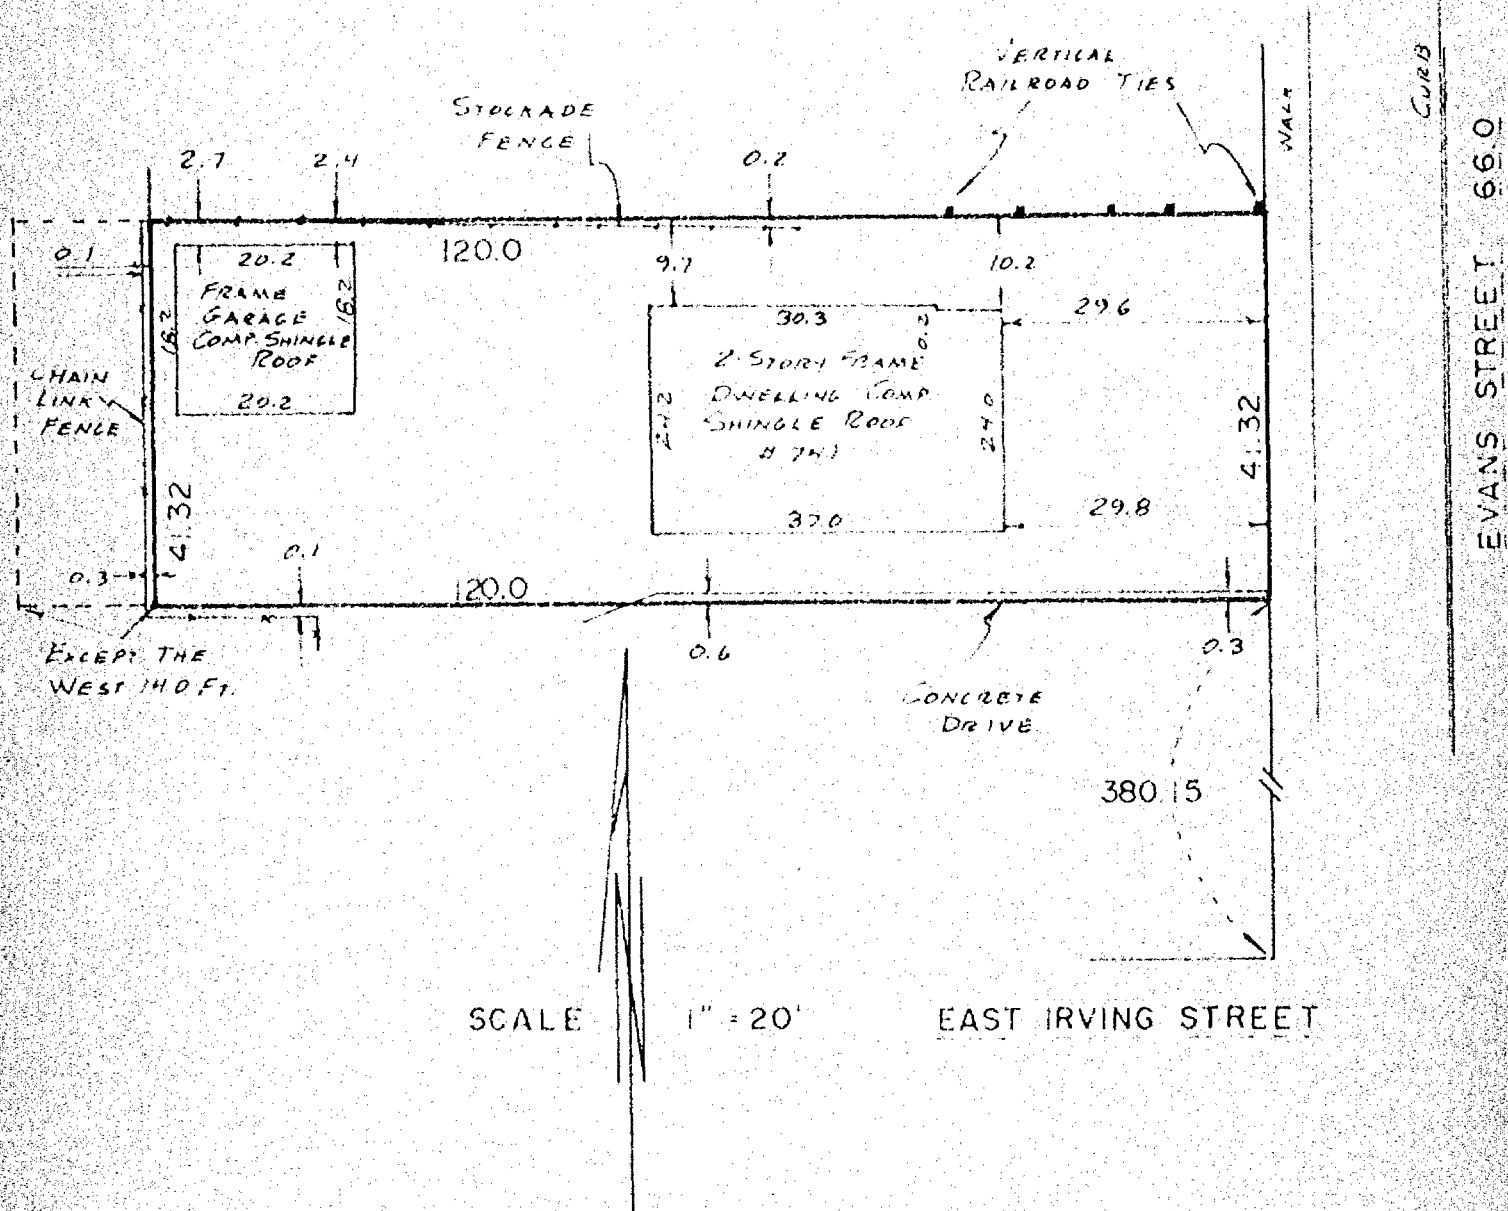


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

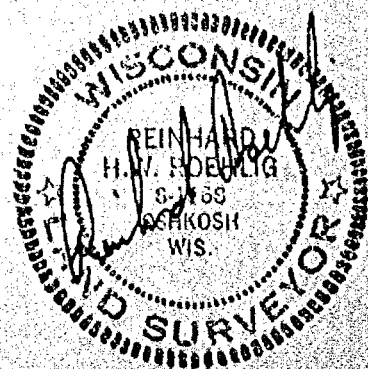

N

# PLAT OF SURVEY


KNOWN AS 701 EAST NEW YORK AVENUE, BEING LOT 4 AND THE WEST 55.5 FT. OF THE EAST 111.0 FT. OF LOT 19 IN CASWELL'S ADDITION, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

JULY 3, 1984

SURVEY FOR OSHKOSH SAVINGS  
APPLICANT: BRUCE BERRELL  
MONUMENT WAIVER ON FILE

SURVEY NO. 1482-M

NEW YORK AVENUE 60.0

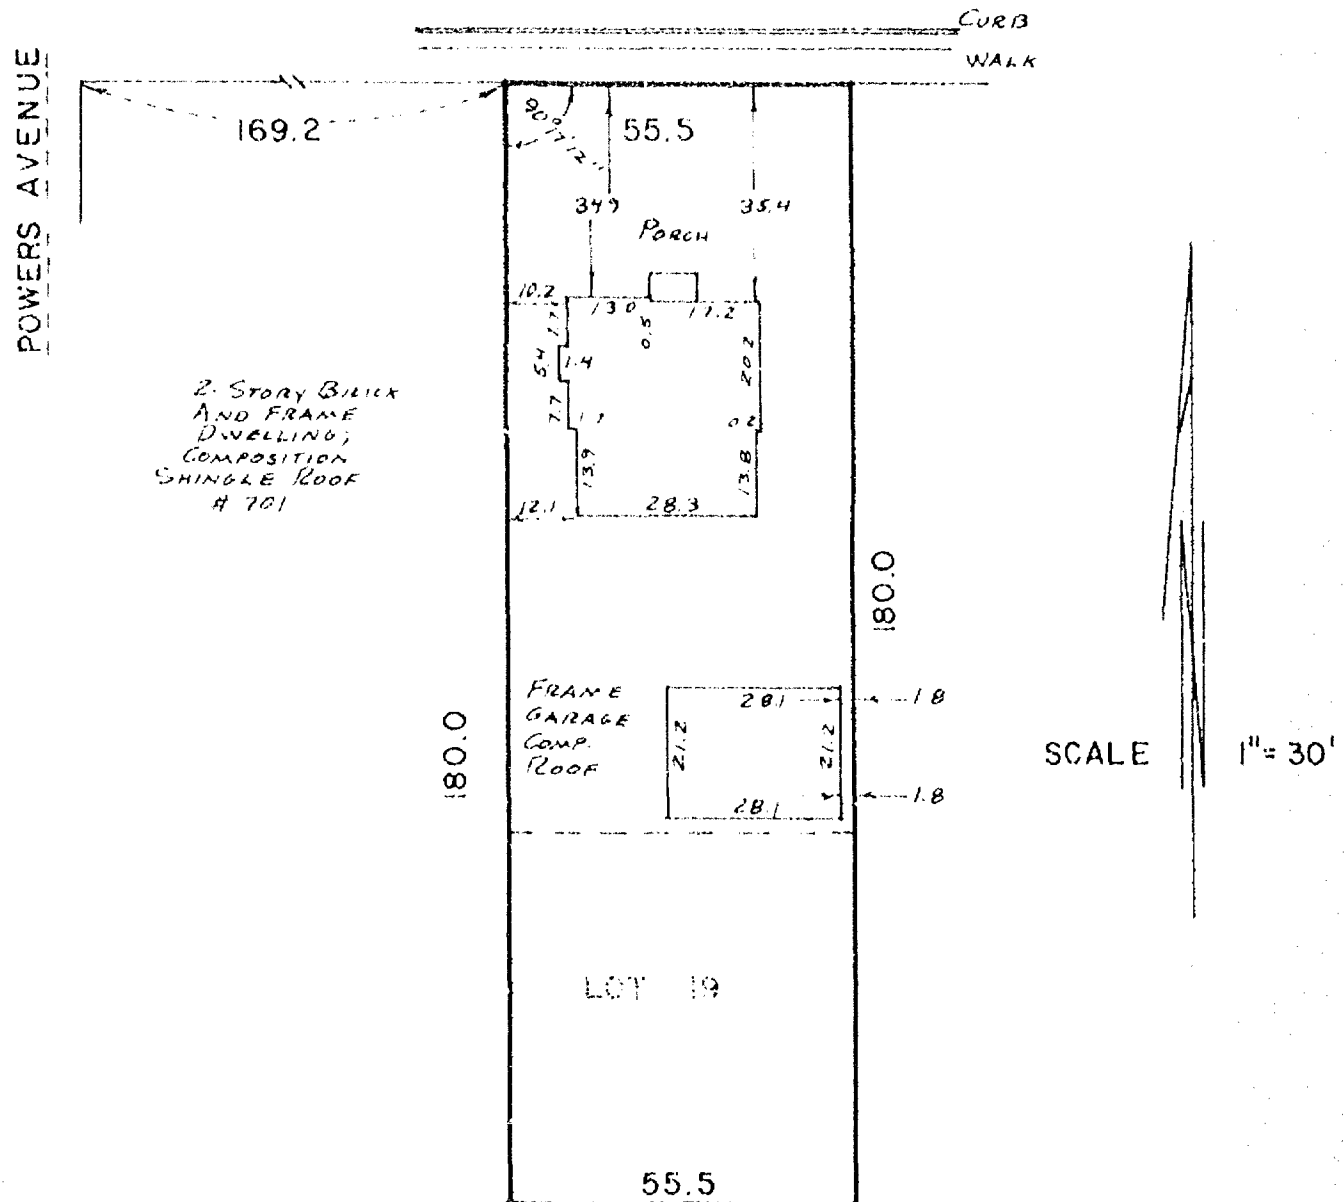


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

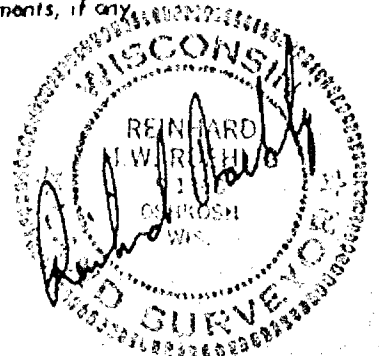




3

AUGUST 20, 1984

SURVEY NO. 1519-14




417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

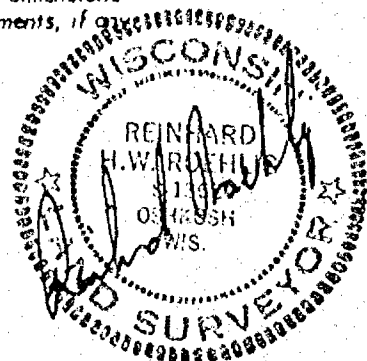

E

SURVEY  
FOR  
WALTER SCOTT

Lot 3 except the East 90 feet thereof, Lot 9 except the East 90 feet thereof and Lot 4 except the West 105 feet thereof also excepting the South 183 feet thereof all in Block 37, Evan's Addition in the 11th Ward, City of Oshkosh, Winnebago County, Wisconsin.

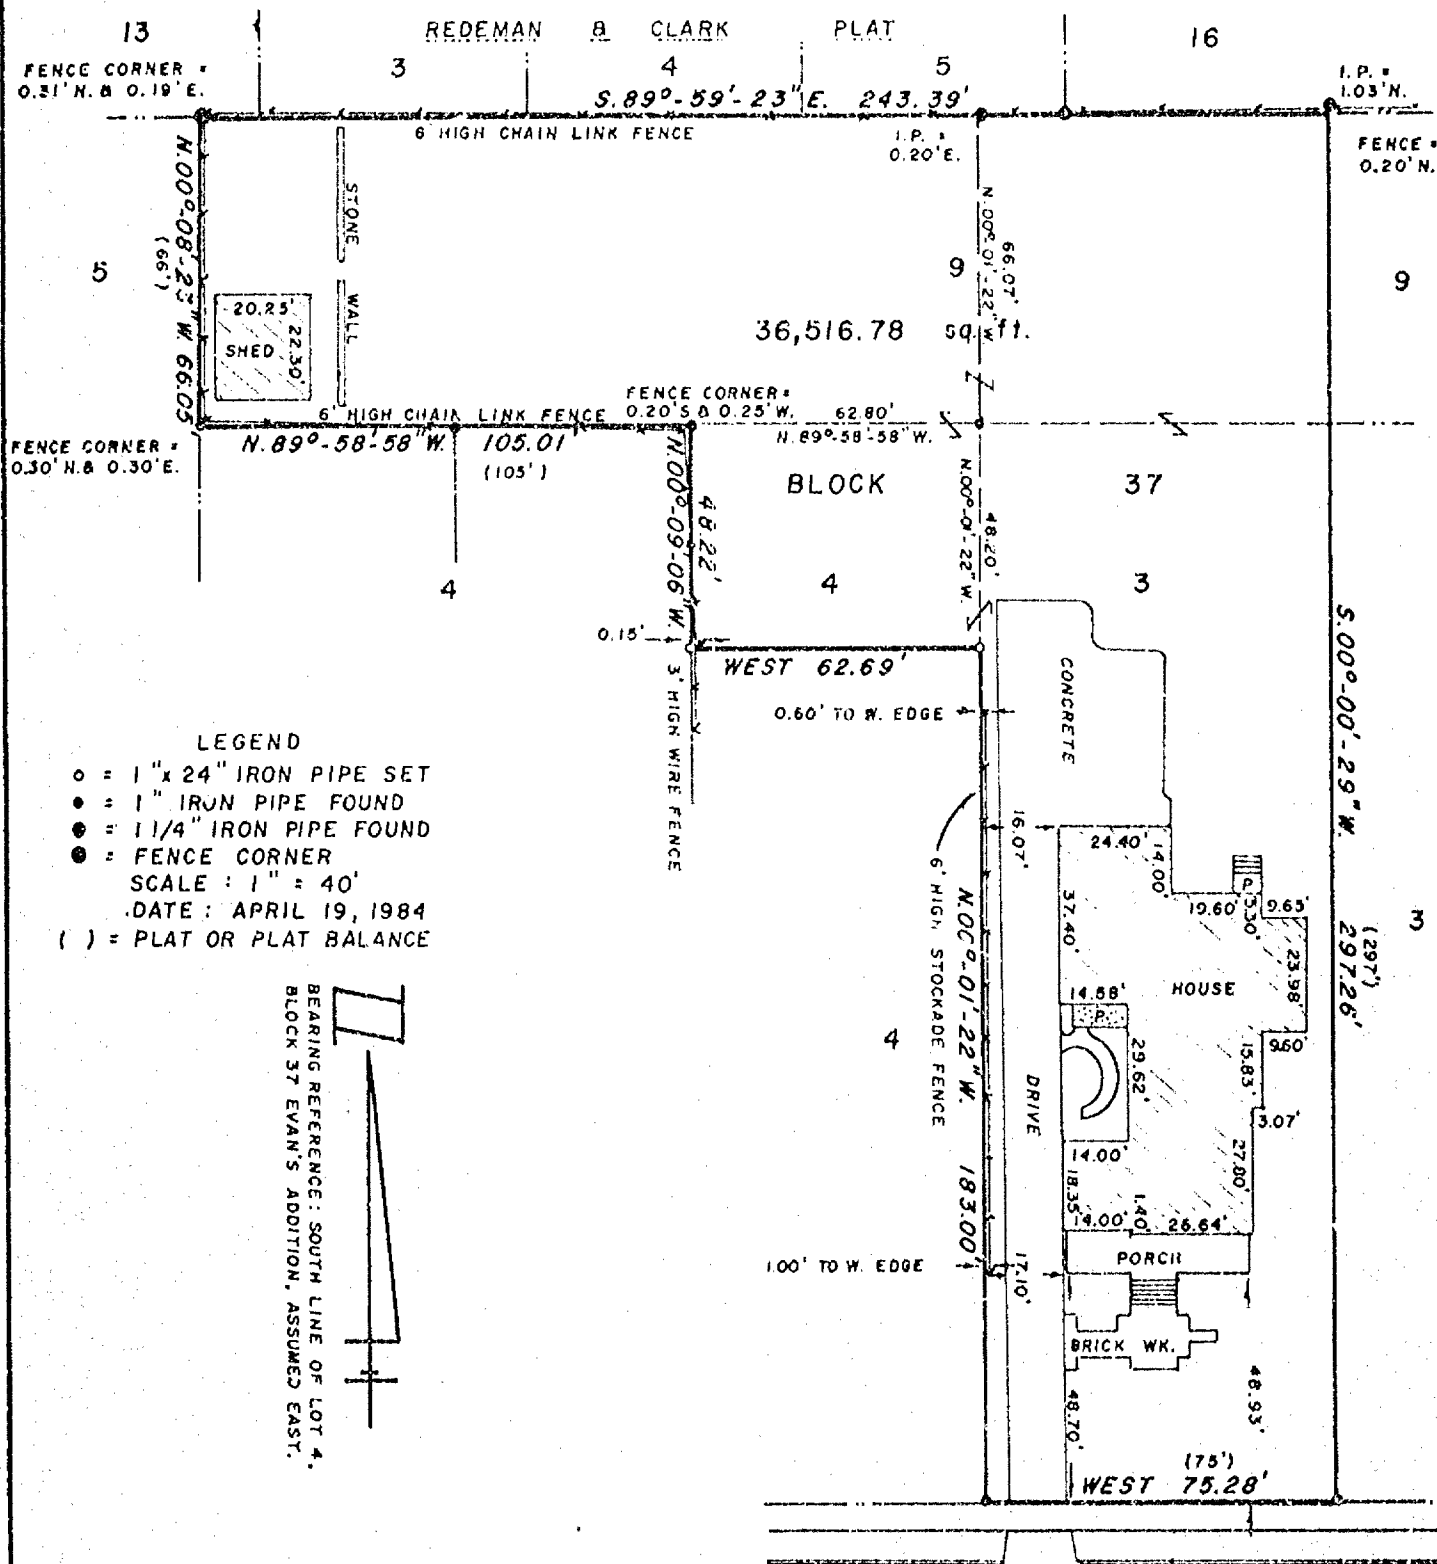

I, RONALD A. DERCKS, WISCONSIN REGISTERED LAND SURVEYOR OF AERO-METRIC ENGINEERING, INC., CERTIFY THAT I HAVE SURVEYED THE ABOVE DESCRIBED PROPERTY AND THAT THE MAP SHOWN ABOVE IS A TRUE AND CORRECT REPRESENTATION THEREOF TO THE BEST OF MY KNOWLEDGE AND BELIEF.

AERO-METRIC ENGINEERING, INC.  
PHOTOGRAMMETRIC ENGINEERS  
LAND SURVEYORS  
OSHKOSH, WISCONSIN

*Ronald A. Dercks*  
WIS. REGISTERED LAND SURVEYOR S-1615  
NOTEBOOK 77 PAGE 67-70



L-1272



E

The South 183 feet of Lot 4, Block 37 Evan's Addition in the 11th Ward, City of Oshkosh, Winnebago County, Wisconsin EXCEPT the West 105 feet thereof.

SURVEY  
FOR  
WALTER SCOTT

I, STEVEN T. CHRONIS, WISCONSIN REGISTERED LAND SURVEYOR OF AERO-METRIC ENGINEERING, INC., CERTIFY THAT I HAVE SURVEYED THE ABOVE DESCRIBED PROPERTY AND THAT THE MAP SHOWN BELOW IS A TRUE AND CORRECT REPRESENTATION THEREOF TO THE BEST OF MY KNOWLEDGE AND BELIEF.

— LEGEND —  
○ = 1" x 24" IRON PIPE SET  
● = 1" IRON PIPE FOUND  
SCALE: 1" = 20'  
APRIL 19, 1984

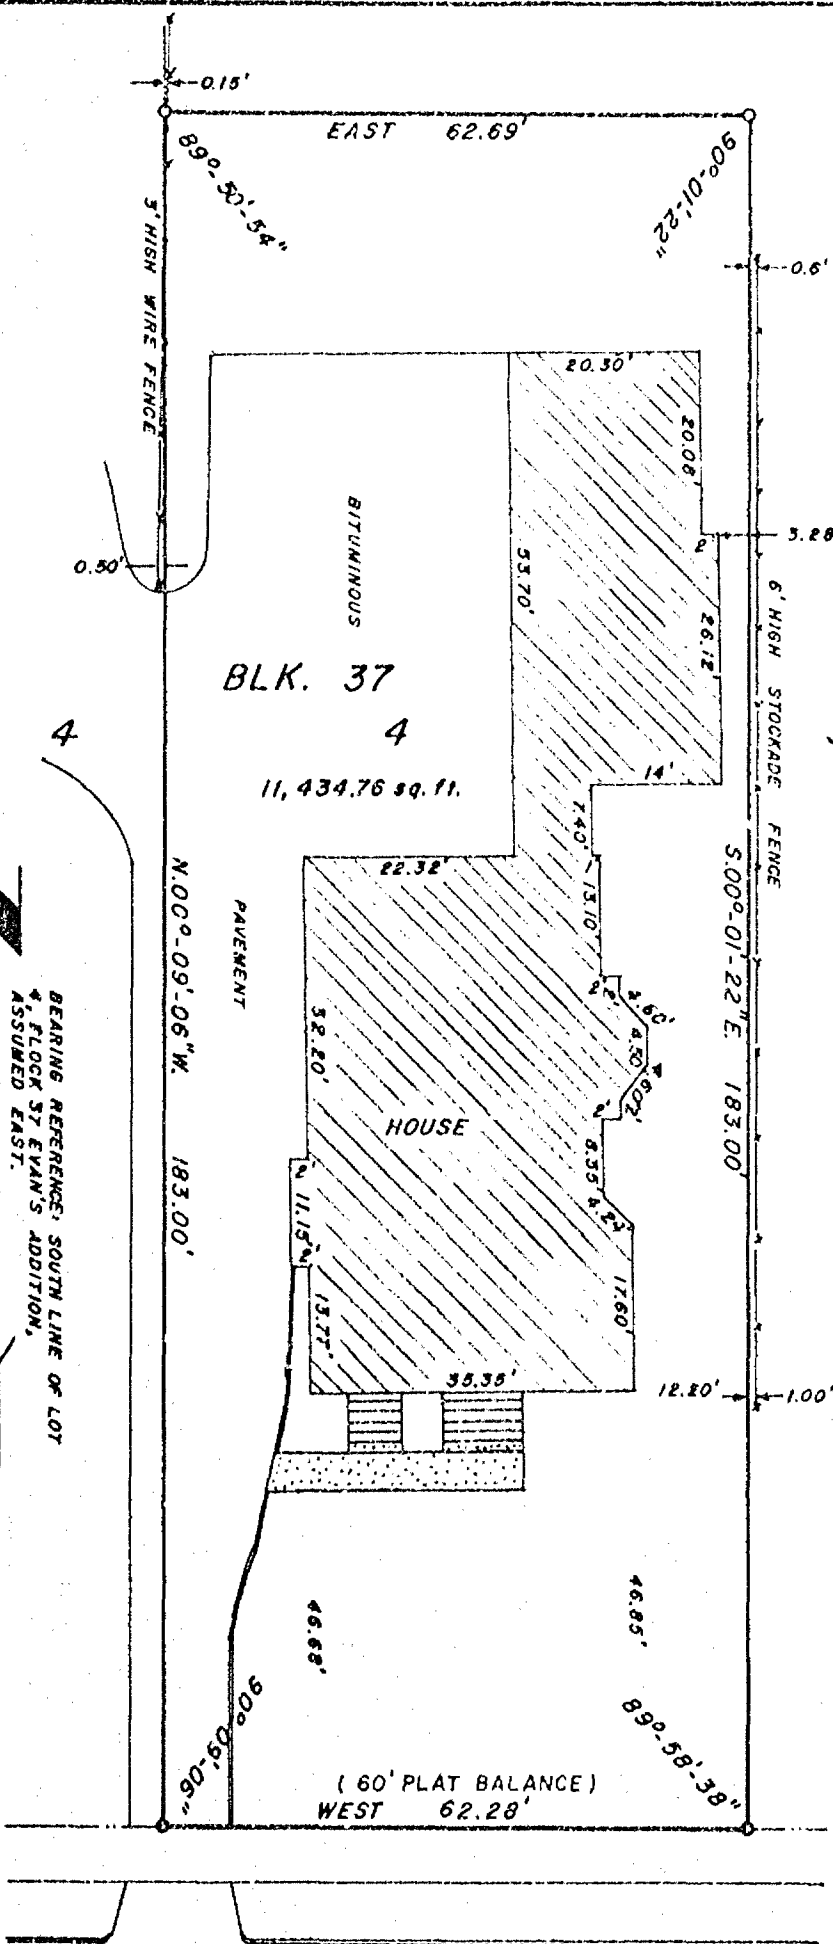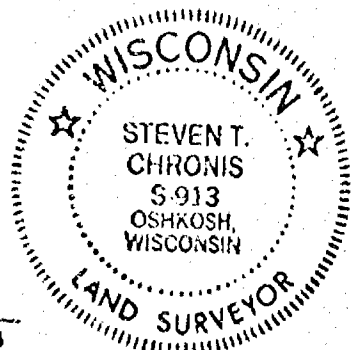

WASHINGTON AVENUE

AERO-METRIC ENGINEERING, INC.  
PHOTOGRAMMETRIC ENGINEERS  
LAND SURVEYORS  
OSHKOSH, WISCONSIN

*Steven T. Chronis*  
WIS. REGISTERED LAND SURVEYOR S-913  
NOTEBOOK 77 PAGE 67-70

L-1273


# PLAT OF SURVEY

KNOWN AS 1110 EVANS STREET, LOTS 3 AND 4 IN GLOBE ADDITION NO. 2, IN THE ELEVENTH WARD CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

AUGUST 27, 1981

SURVEY FOR TIMOTHY WEX

SURVEY NO. 189-S

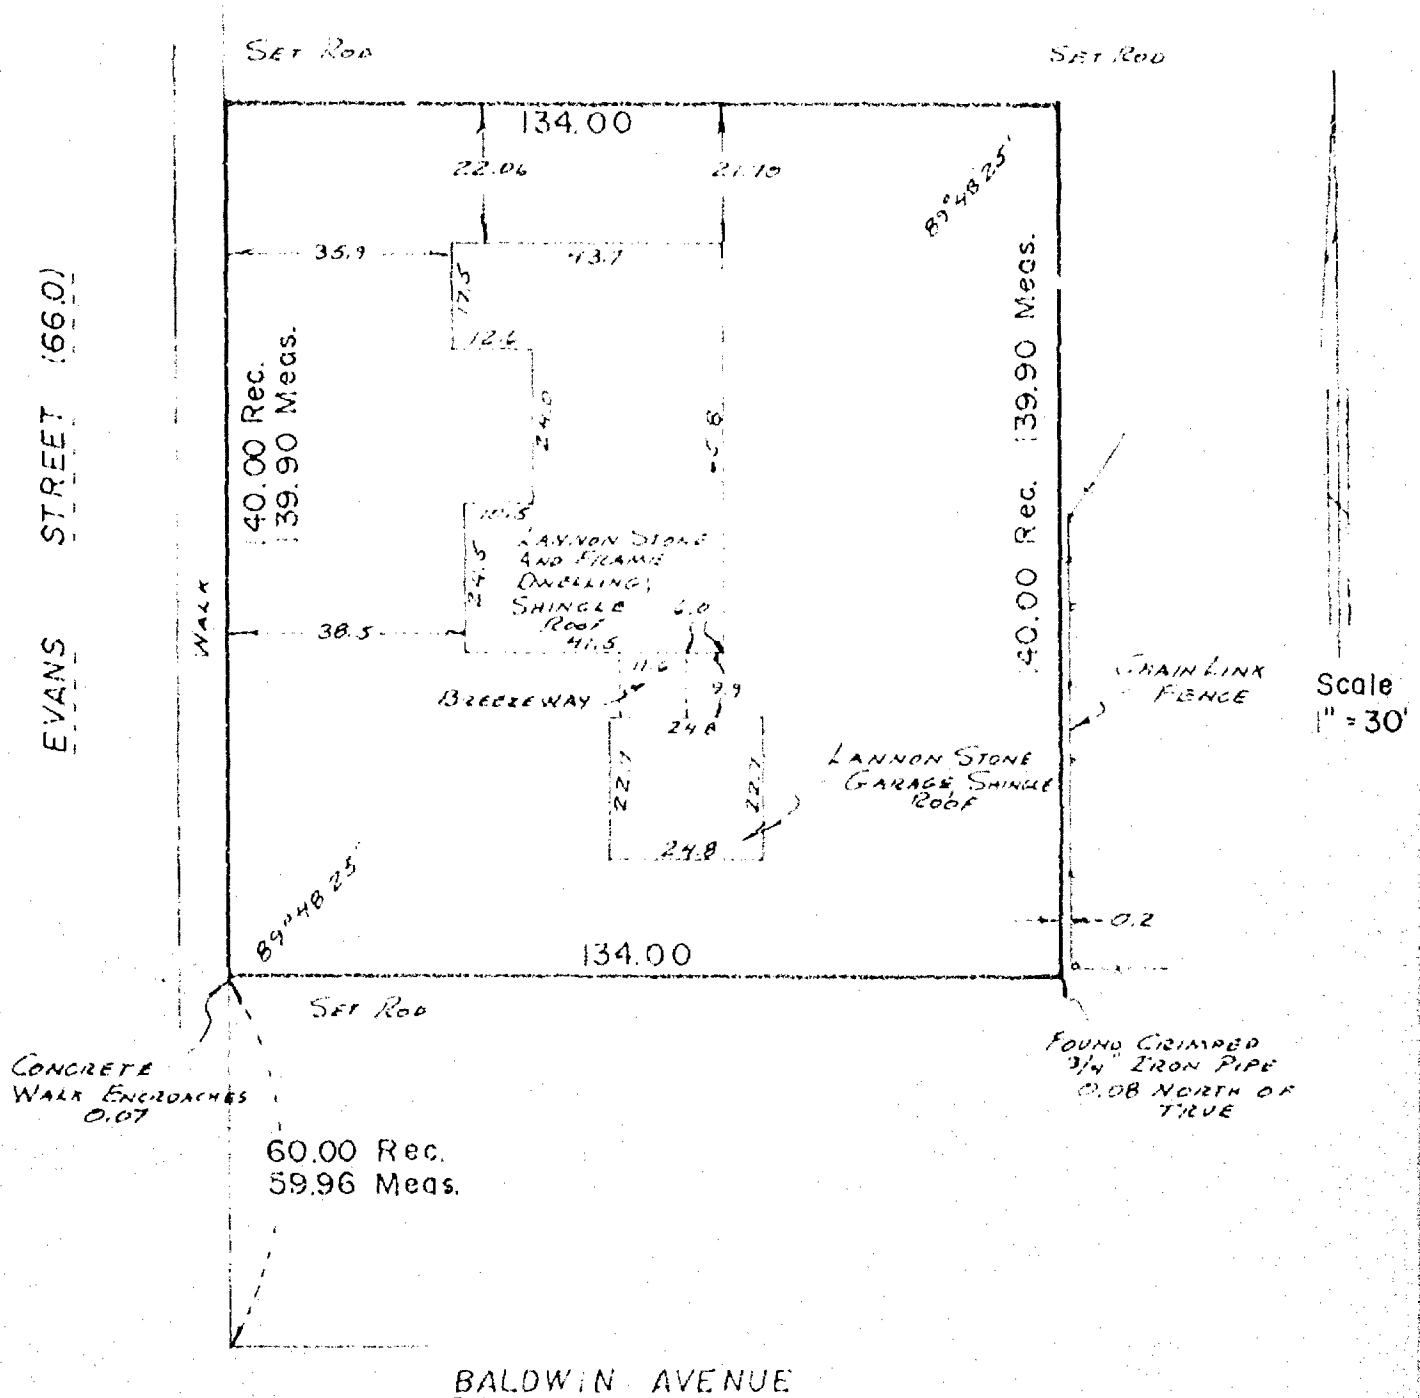


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

*Reinhard Roehlig*

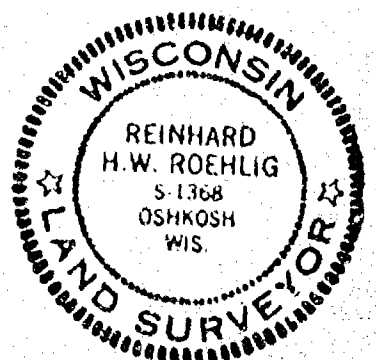


# PLAT OF SURVEY

KNOWN AS 1032 BOWEN STREET, BEING LOT 11 AND THE NORTH 1/2 OF LOT 10 IN THE GLOBE ADDITION NO. 1 IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

NOVEMBER 16, 1983

SURVEY FOR OSHKOSH SAVINGS  
APPLICANT: GREGORY CHAPIN  
MONUMENT WAIVER ON FILE

SURVEY NO. 1357-M

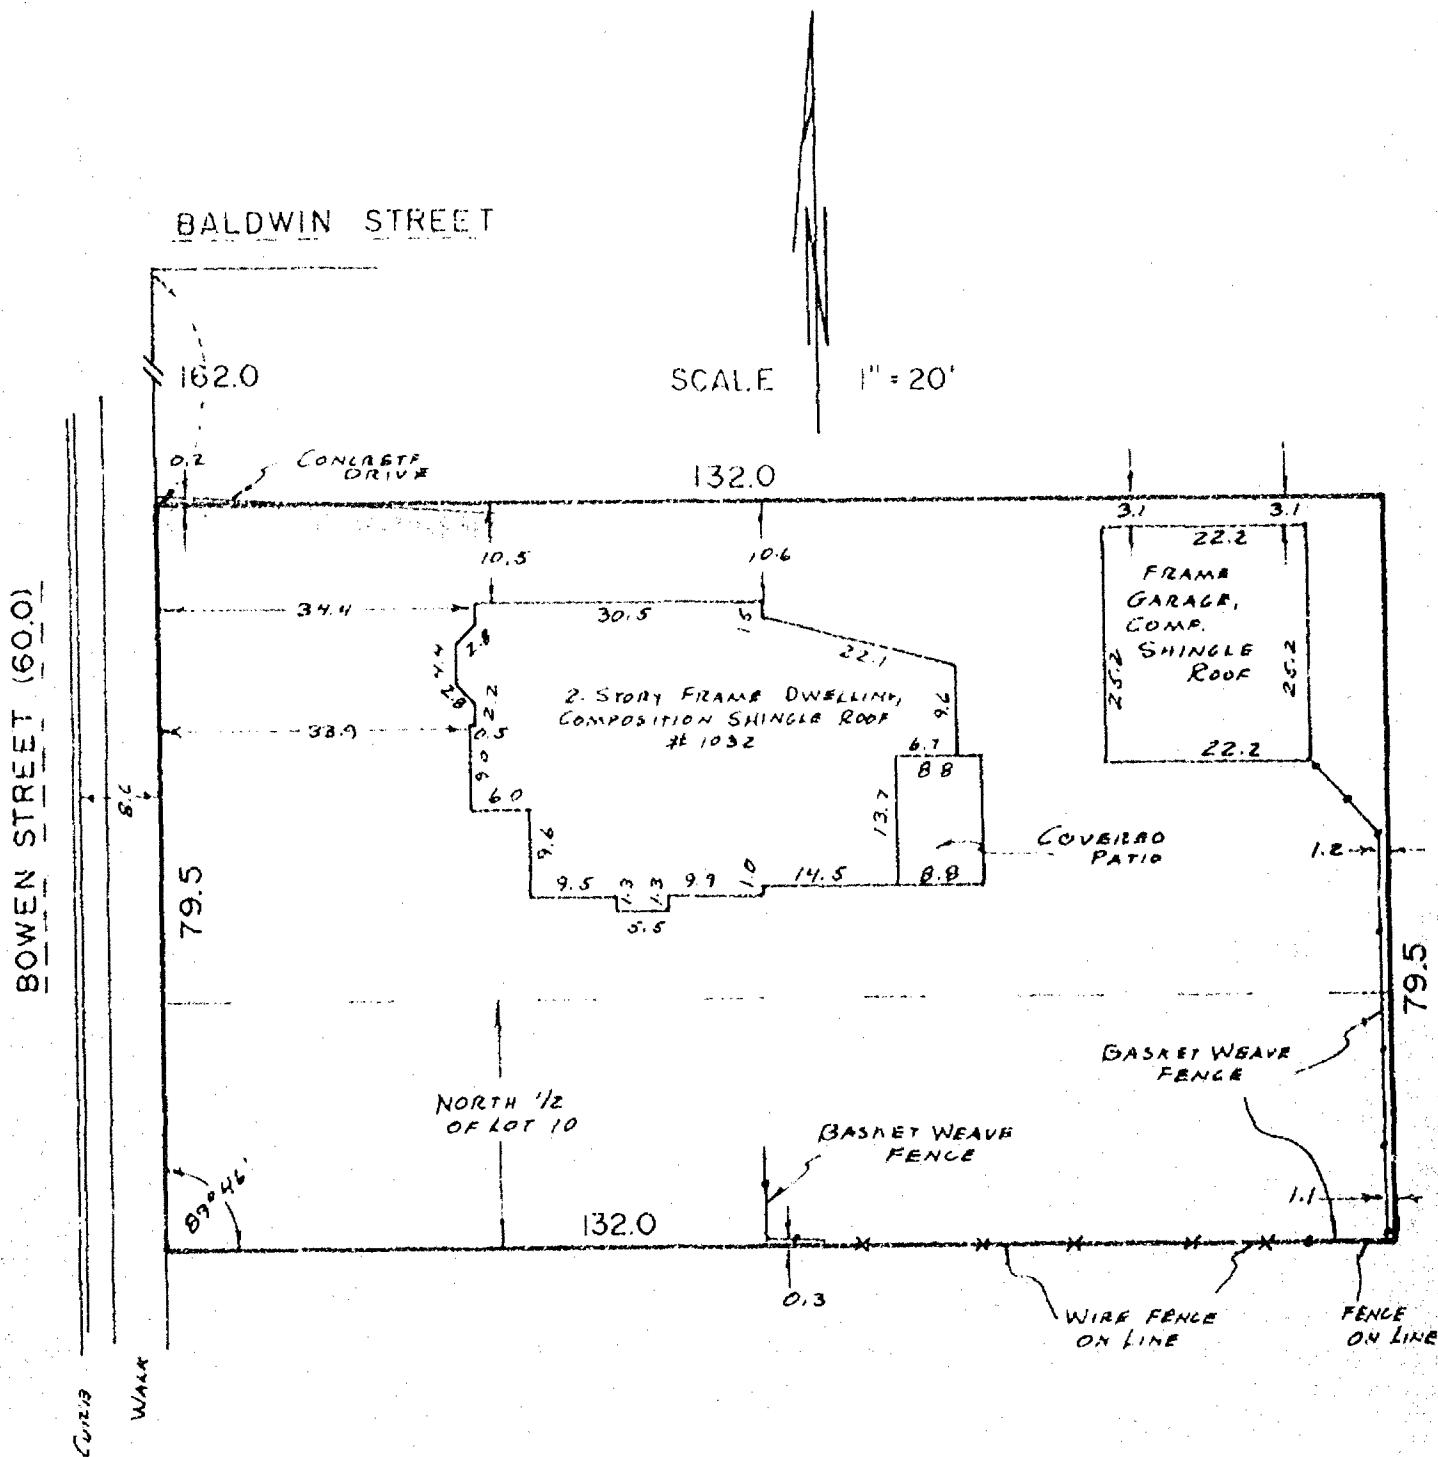


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

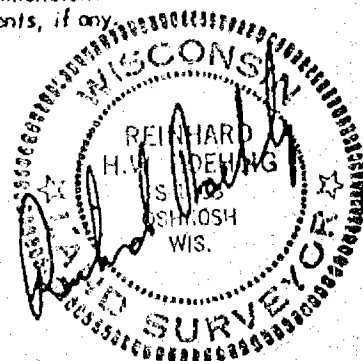


# PLAT OF SURVEY

KNOWN AS 930 MONROE STREET, BEING LOT 4 OF BLOCK 5 IN KIRST AND BEGLINGER'S SUBDIVISION, IN THE 11th WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

AUGUST 25, 1983

SURVEY FOR OSHKOSH SAVINGS  
APPLICANT: JOSEPH KRONSCHEIDT  
MONUMENT WAIVER ON FILE

SURVEY NO. 1286-M

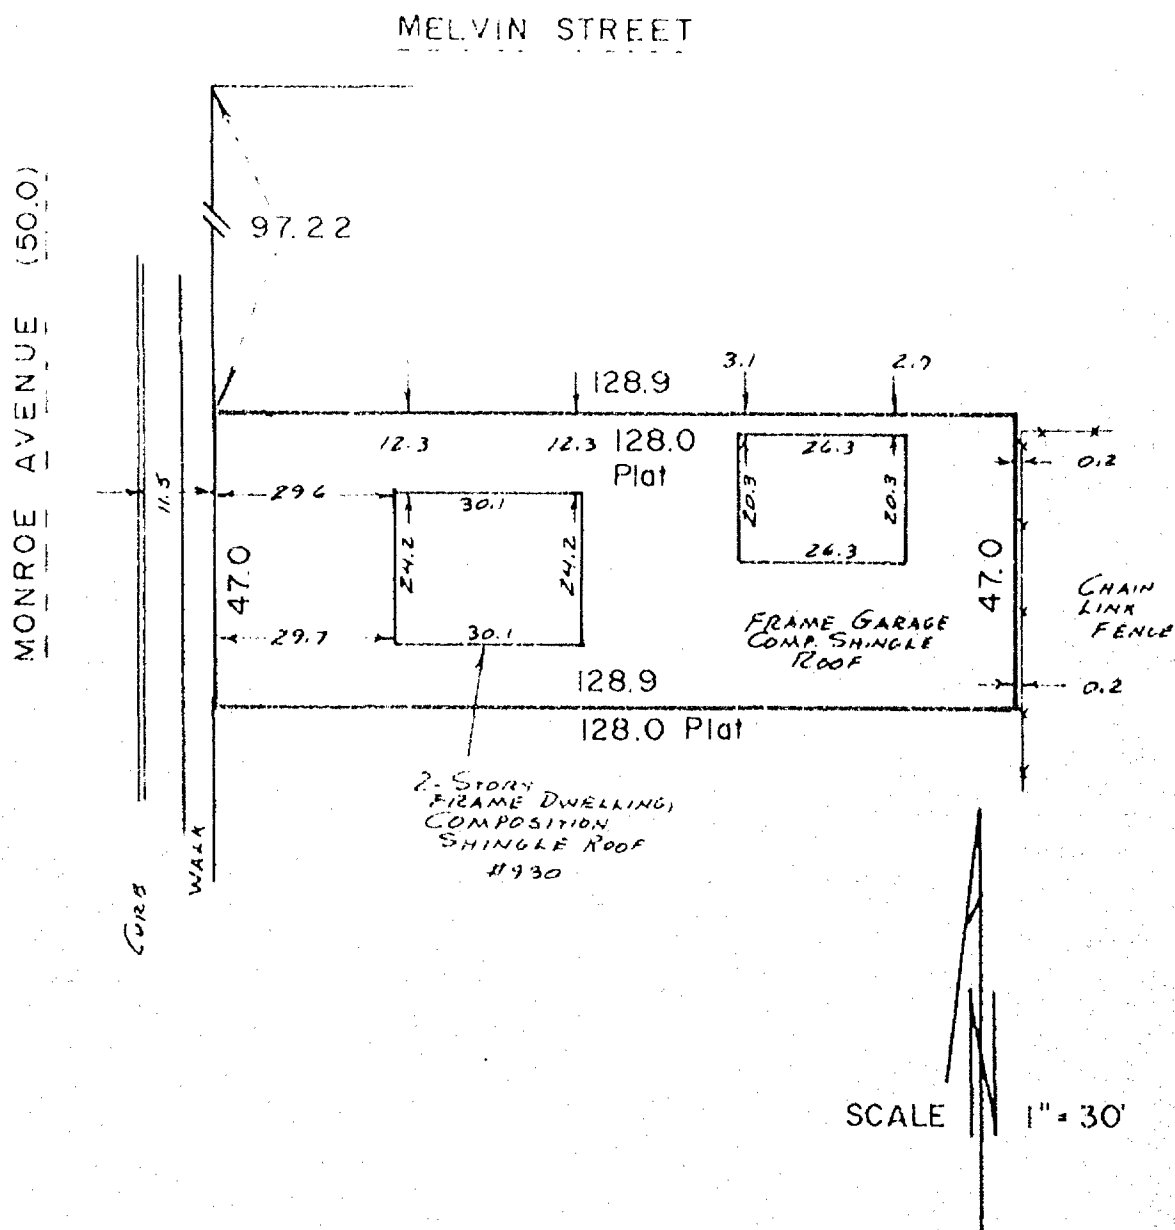


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

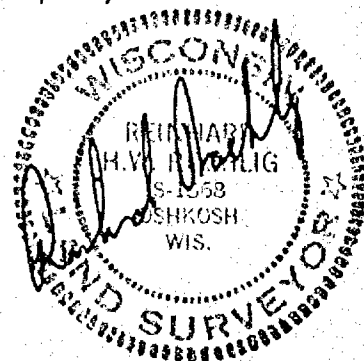


# PLAT OF SURVEY

KNOWN AS 812 MONROE STREET. BEING LOT 8 OF BLOCK 1 IN KIRST AND BEGLINGER'S SUBDIVISION IN THE 11th WARD OF THE CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

MAY 28, 1980


(ROBERT BECKER-OWNER)

SURVEY NO. 112-S

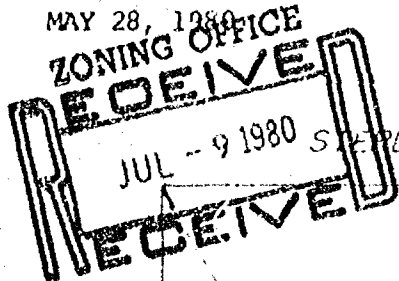

STERLING AVENUE (60.0)

MONROE STREET (50.0)

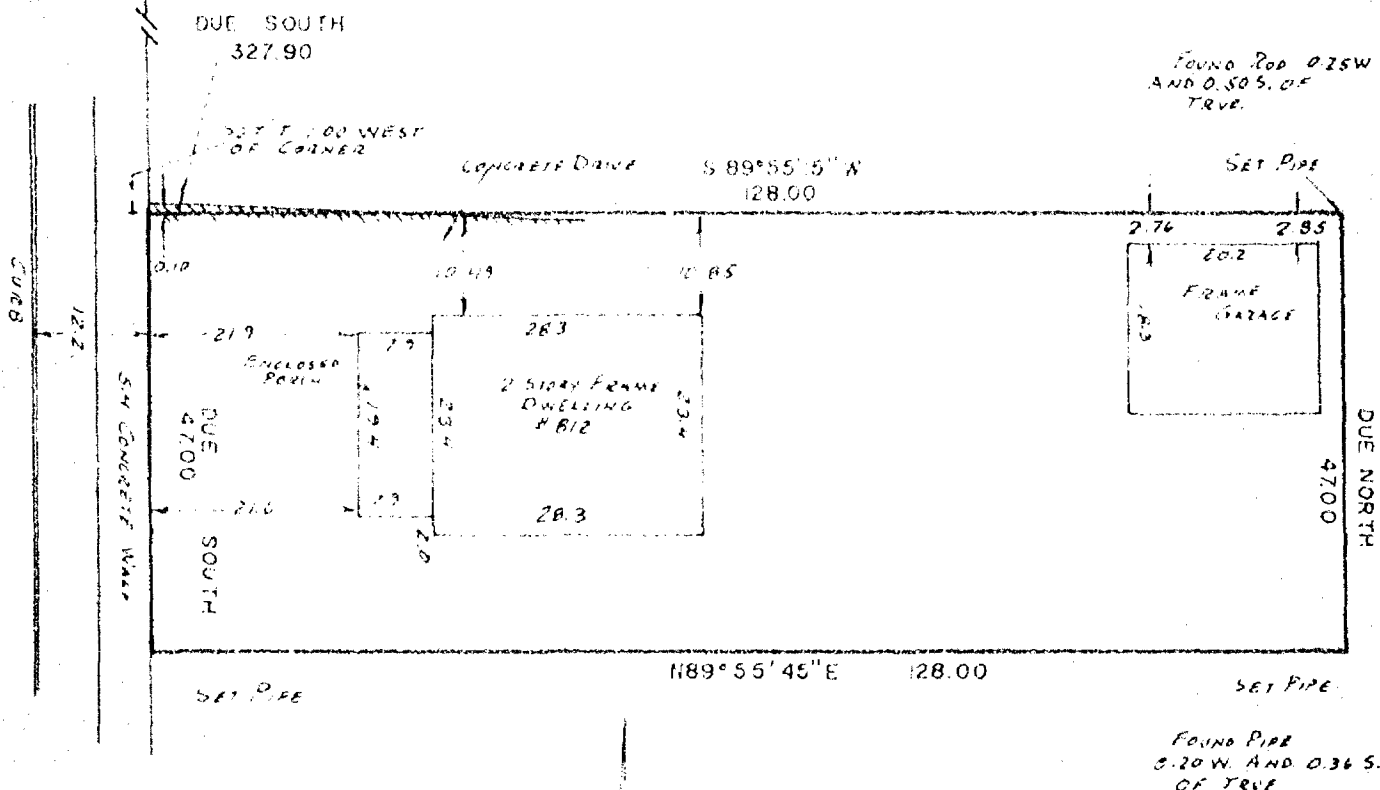

SCALE 1" = 20'


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2663  
OSHKOSH, WISCONSIN 54903  
(414) 425-2800


*Reinhard Roehlig*

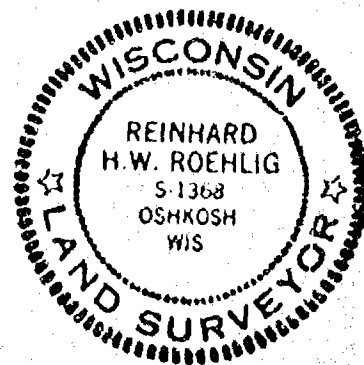

SURVEY  
for  
ATTORNEY FINTAN M. FLANAGAN  
of

The South 38 feet of lot 24 and the North 2 feet of lot 25 in  
Block 65 of SCHINTZ'S ADDITION, 11th Ward, City of Oshkosh,  
Winnebago County, Wisconsin.

Description for PROPOSED JOINT DRIVEWAY EASEMENT: The West 108  
feet of the South 3 feet of lot 24 and the West 108 feet of the  
North 7 feet of lot 25 all in Block 65 of SCHINTZ'S ADDITION,  
11th Ward, City of Oshkosh, Winnebago County, Wisconsin.

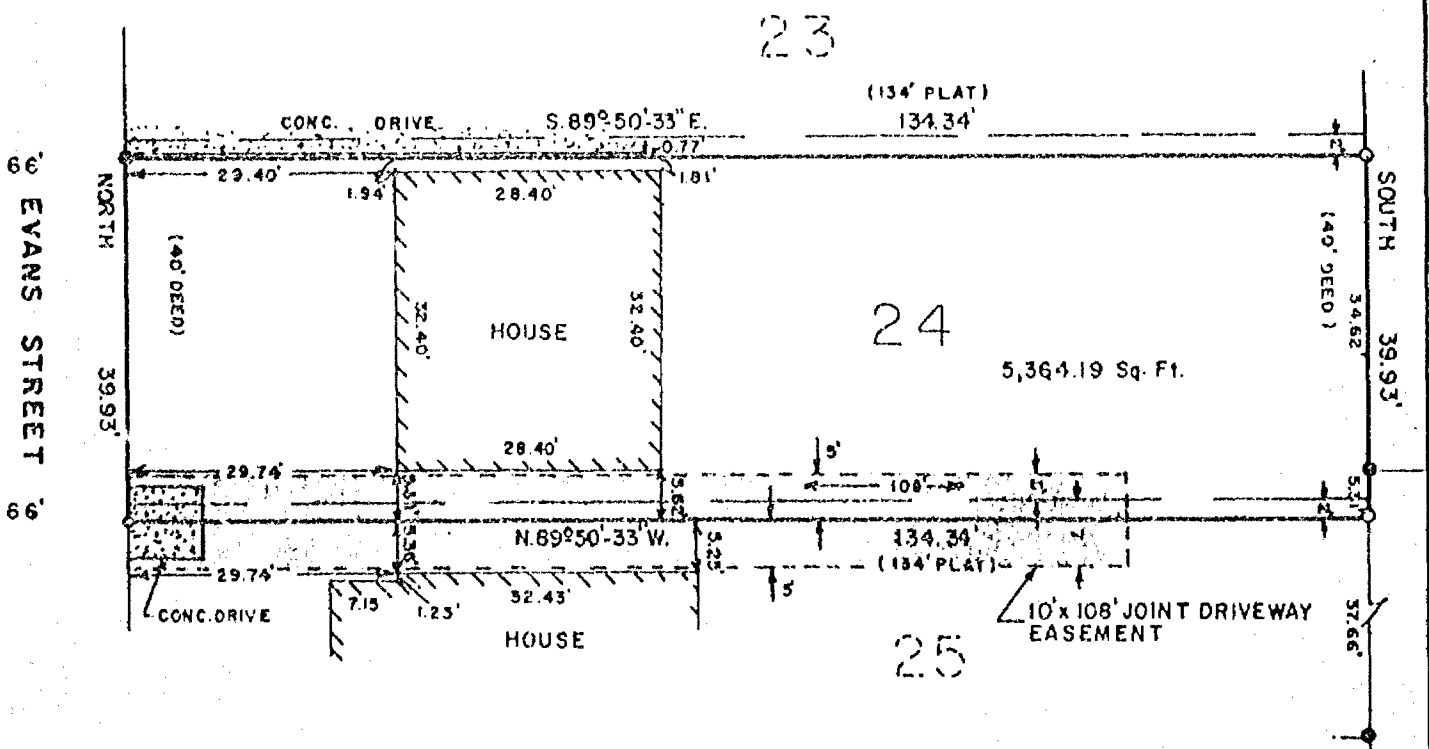

LEGEND  
○ = 1" IRON PIPE SET  
◐ = 1/2" REROD SET  
● = 1" IRON PIPE FOUND  
SCALE 1"=20'  
DATE: NOV. 24, 1980


I, STEVEN T. CHRONIS, WISCONSIN REGISTERED LAND SURVEYOR OF AERO-METRIC ENGINEERING, INC., HAVE SURVEYED THE ABOVE DESCRIBED PROPERTY AND THE ABOVE MAP IS A TRUE REPRESENTATION THEREOF AND SHOWS THE SIZE AND LOCATION OF THE PROPERTY, ITS EXTERIOR BOUNDARIES, THE LOCATION AND DIMENSIONS OF ALL STRUCTURES THEREON, FENCES, APPARENT EASEMENTS AND ROADWAYS AND VISIBLE ENCROACHMENTS IF ANY.

"THIS SURVEY IS MADE FOR THE EXCLUSIVE USE OF THE PRESENT OWNERS OF THE PROPERTY, AND ALSO THOSE WHO PURCHASE, MORTGAGE OR GUARANTEE THE TITLE THERE TO WITHIN ONE (1) YEAR FROM DATE HEREOF, AND AS TO THEM I HEREBY CERTIFY THAT SAID SURVEY AND THE ABOVE MAP WERE MADE IN ACCORDANCE WITH ACCEPTABLE PROFESSIONAL STANDARDS AND THAT THE INFORMATION CONTAINED THEREON IS, TO THE BEST OF MY KNOWLEDGE, INFORMATION AND BELIEF, A TRUE AND ACCURATE REPRESENTATION THEREOF."


*Steven T. Chronis*  
STEVEN T. CHRONIS  
WISCONSIN REGISTERED LAND SURVEYOR S-913

DATED THIS 25th DAY OF November 1980

AERO-METRIC ENGINEERING, INC.  
PHOTOGRAMMETRIC ENGINEERS  
LAND SURVEYORS  
OSHKOSH, WISCONSIN

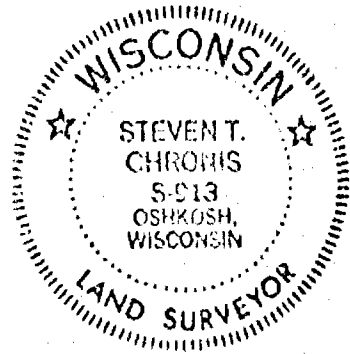


ALL BEARINGS REFERENCE TO THE EAST  
LINE OF EVANS STREET ASSUMED TO BEAR  
NORTH





*City of Oshkosh*

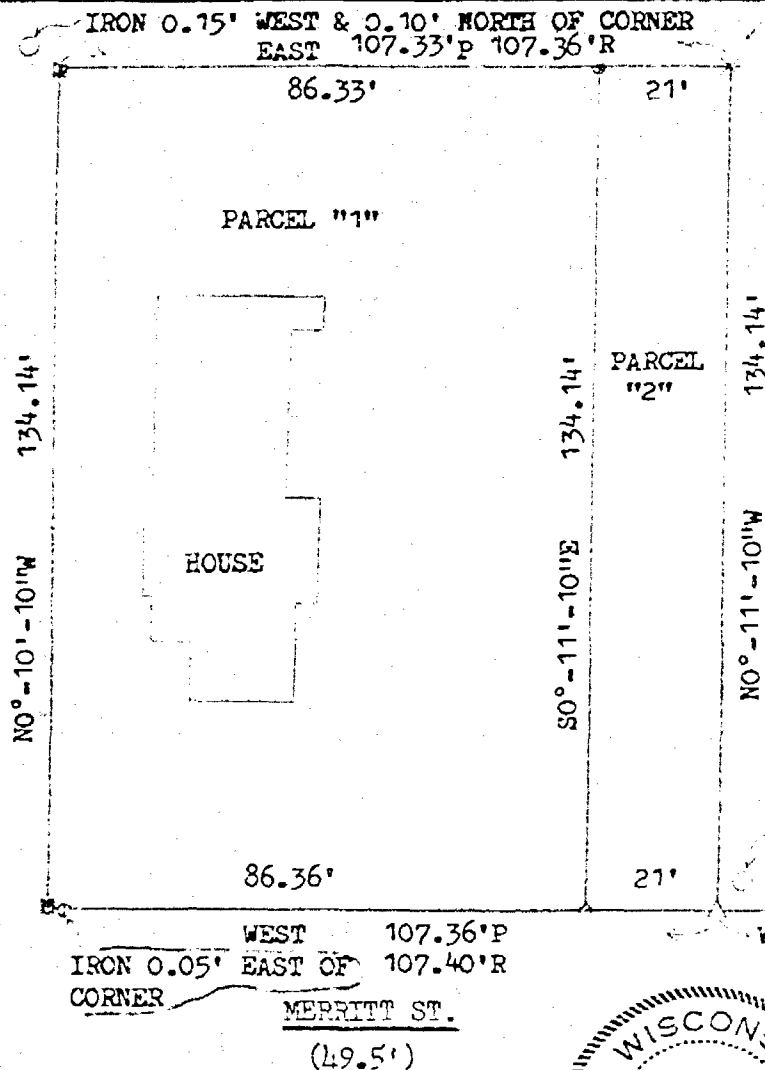

IRON 0.15' EAST & 0.25' NORTH OF CORNER

DESCRIPTION FOR PARCEL "1": LOTS 19 AND 20, VOSS SUBDIVISION, LESS THE EAST 21.00 FEET THEREOF, ELEVENTH WARD CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN, MORE FULLY DESCRIBED AS FOLLOWS: COMMENCING AT THE SOUTHEAST CORNER OF VOSS SUBDIVISION; THENCE WEST 80.48 FEET PROPORTIONED, 80.50 FEET RECORDED, ALONG THE SOUTH LINE OF VOSS SUBDIVISION TO THE POINT OF BEGINNING; THENCE CONTINUING WEST ALONG SAID SOUTH LINE, 86.36 FEET PROPORTIONED 86.40 FEET RECORDED TO THE WEST LINE OF LOT 20; THENCE NO°-10'-10"W, 134.14 FEET ALONG SAID WEST LINE TO THE NORTH LINE OF LOT 20; THENCE EAST, 86.33 FEET PROPORTIONED, 86.36 FEET RECORDED, ALONG SAID NORTH LINE \* THENCE SO°-11'-10"E, 134.14 FEET TO THE POINT OF BEGINNING. SUBJECT TO ALL EASEMENTS AND RESTRICTIONS OF RECORD. \* AND THE NORTH LINE OF LOT 19;

DESCRIPTION FOR PARCEL "2": THE EAST 21.00 FEET OF LOT 19, VOSS SUBDIVISION, ELEVENTH WARD CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN, MORE FULLY DESCRIBED AS FOLLOWS: COMMENCING AT THE SE CORNER OF VOSS SUBDIVISION; THENCE WEST ALONG THE SOUTH LINE OF VOSS SUBDIVISION 59.48 FEET PROPORTIONED, 59.50 FEET RECORDED TO THE SE CORNER OF LOT 19 AND THE POINT OF BEGINNING; THENCE CONTINUING WEST ALONG SAID SOUTH LINE 21.00 FEET; THENCE NO°-11'-10"W, 134.14 FEET TO THE NORTH LINE OF LOT 19; THENCE EAST ALONG SAID NORTH LINE 21.00 FEET TO THE EAST LINE OF LOT 19, THENCE SO°-11'-10"E, 134.14 FEET ALONG SAID EAST LINE TO THE POINT OF BEGINNING. SUBJECT TO ALL EASEMENTS AND RESTRICTIONS OF RECORD.

WEST 107.36'P  
IRON 0.05' EAST OF 107.40'R  
CORNER  
MERRITT ST.  
(49.5')

IRON 0.25' EAST &  
0.35' NORTH OF  
CORNER  
WEST 59.48'P  
59.50'R

SOUTHEAST CORNER OF  
VOSS SUBDIVISION

**LEGEND**

- = 3/4x24" SOLID ROUND IRON ROD SET
- = 5" SPIKE SET
- = 1 1/2" IRON PIPE FOUND
- = 1" IRON PIPE FOUND
- = 1" IRON BAR FOUND
- = RAILROAD SPIKE FOUND
- = PAINT CROSS SET
- R = RECORDED DISTANCE
- P = PROPORTIONED DISTANCE
- = CHISEL CROSS FOUND



I, ROBERT F. REIDER, CERTIFY THAT THIS PLAT OF SURVEY IS A CORRECT REPRESENTATION OF THE ABOVE DESCRIBED PROPERTIES.

REVISIONS	CAROL WERNER FREID-WERNER REALTORS		
	8 JACKSON DR., OSHKOSH, WISCONSIN		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297		
	1827 W. WISCONSIN AVE. • APPLETON, WI 54912		
DRAWN BY	RR-KV KJV	SCALE	1" = 30'
DATE	8/10/81	DRAWING NO.	818.67

B


## PLAT OF SURVEY

KNOWN AS 671 BOWEN STREET, BEING LOT 36 IN THE REPLAT OF BLOCK 62 IN FORD'S ADDITION, IN THE ELEVENTH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

APRIL 27, 1984

SURVEY FOR RAYMOND HELING

SURVEY NO. 1428-S

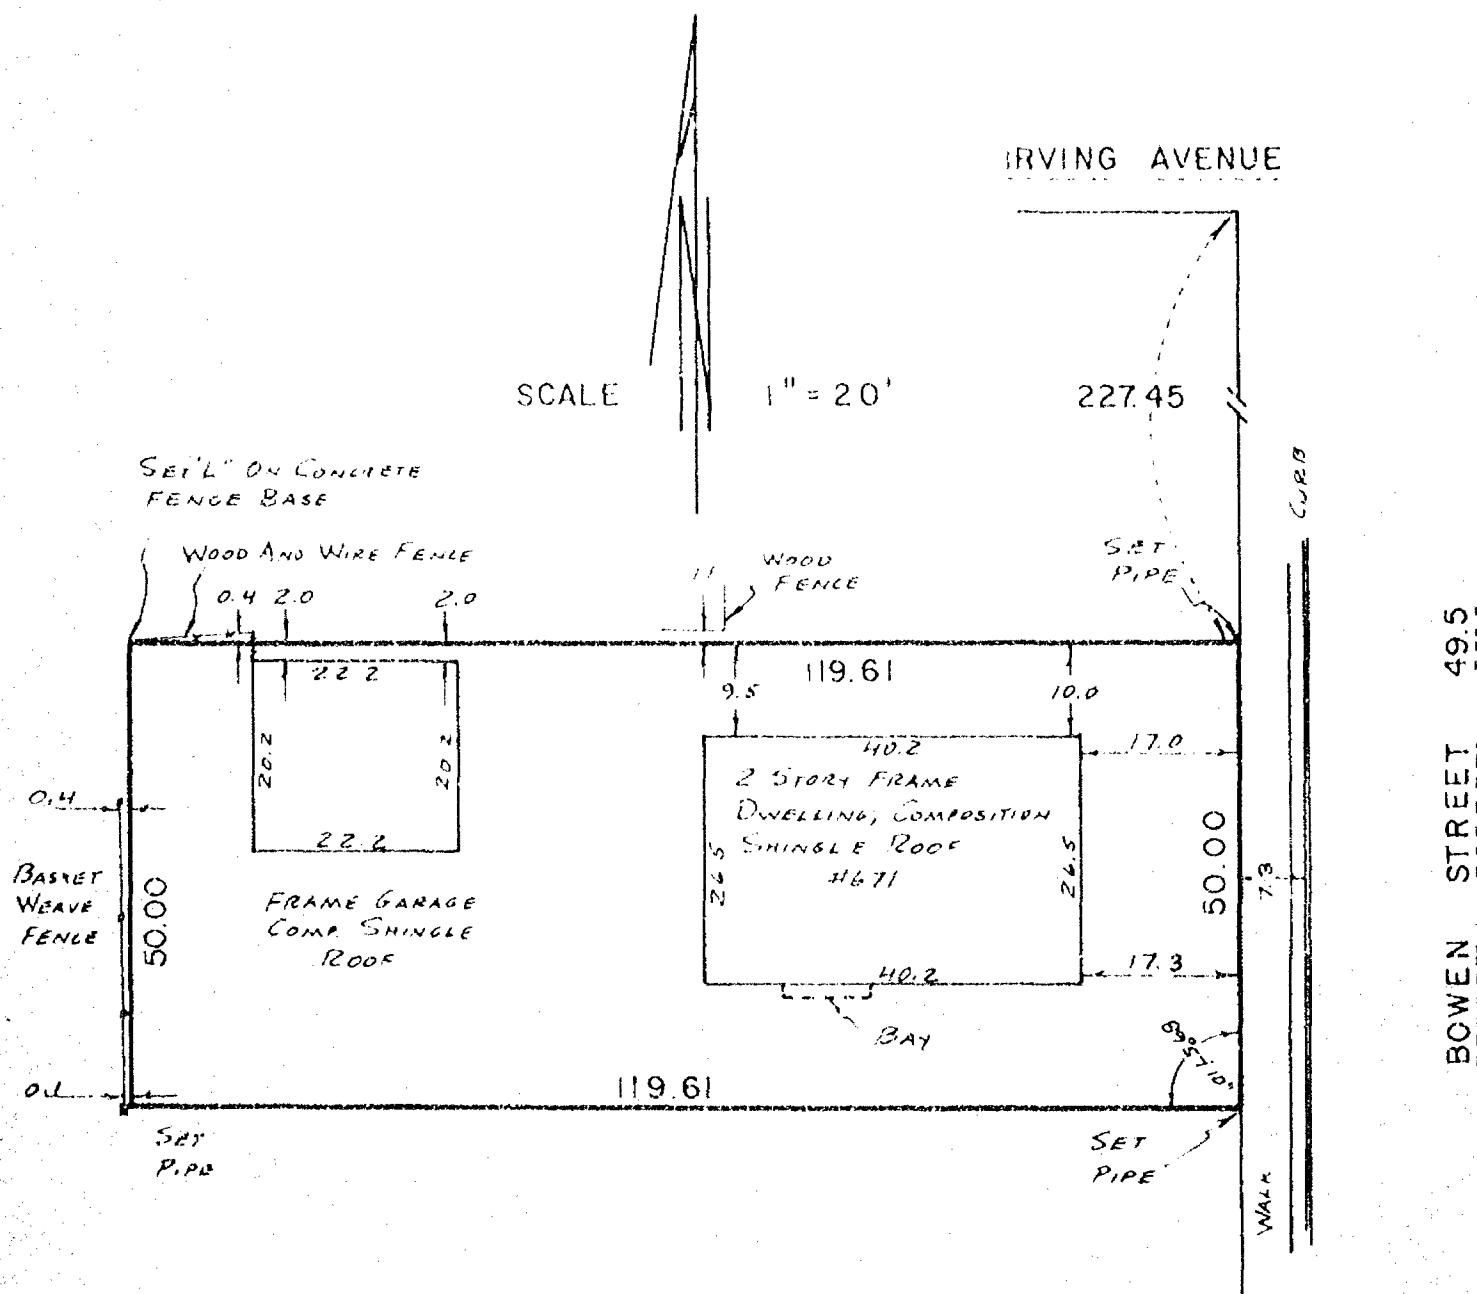


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

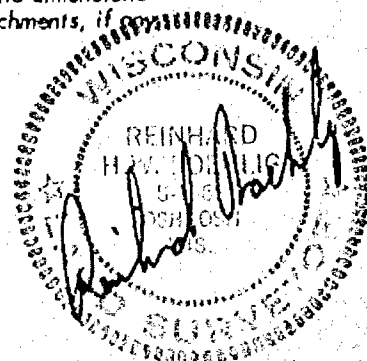

# PLAT OF SURVEY

KNOWN AS 903 PARKWAY AVENUE, BEING LOT 21 IN SCHINTZ'S ADDITION, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

MARCH 27, 1986


SURVEY FOR JAMES NEUBAUER

SURVEY NO. 1706-S

- DENOTES 1 INCH DIAMETER IRON PIPE FOUND.  
 □----- DENOTES CHISELED "T" SET.  
 ○----- DENOTES 1 INCH DIAMETER IRON PIPE SET.

( ) = RECORD DIMENSIONS WERE DIFFERENT FROM FIELD MEASUREMENTS.

PARKWAY AVENUE 49.5

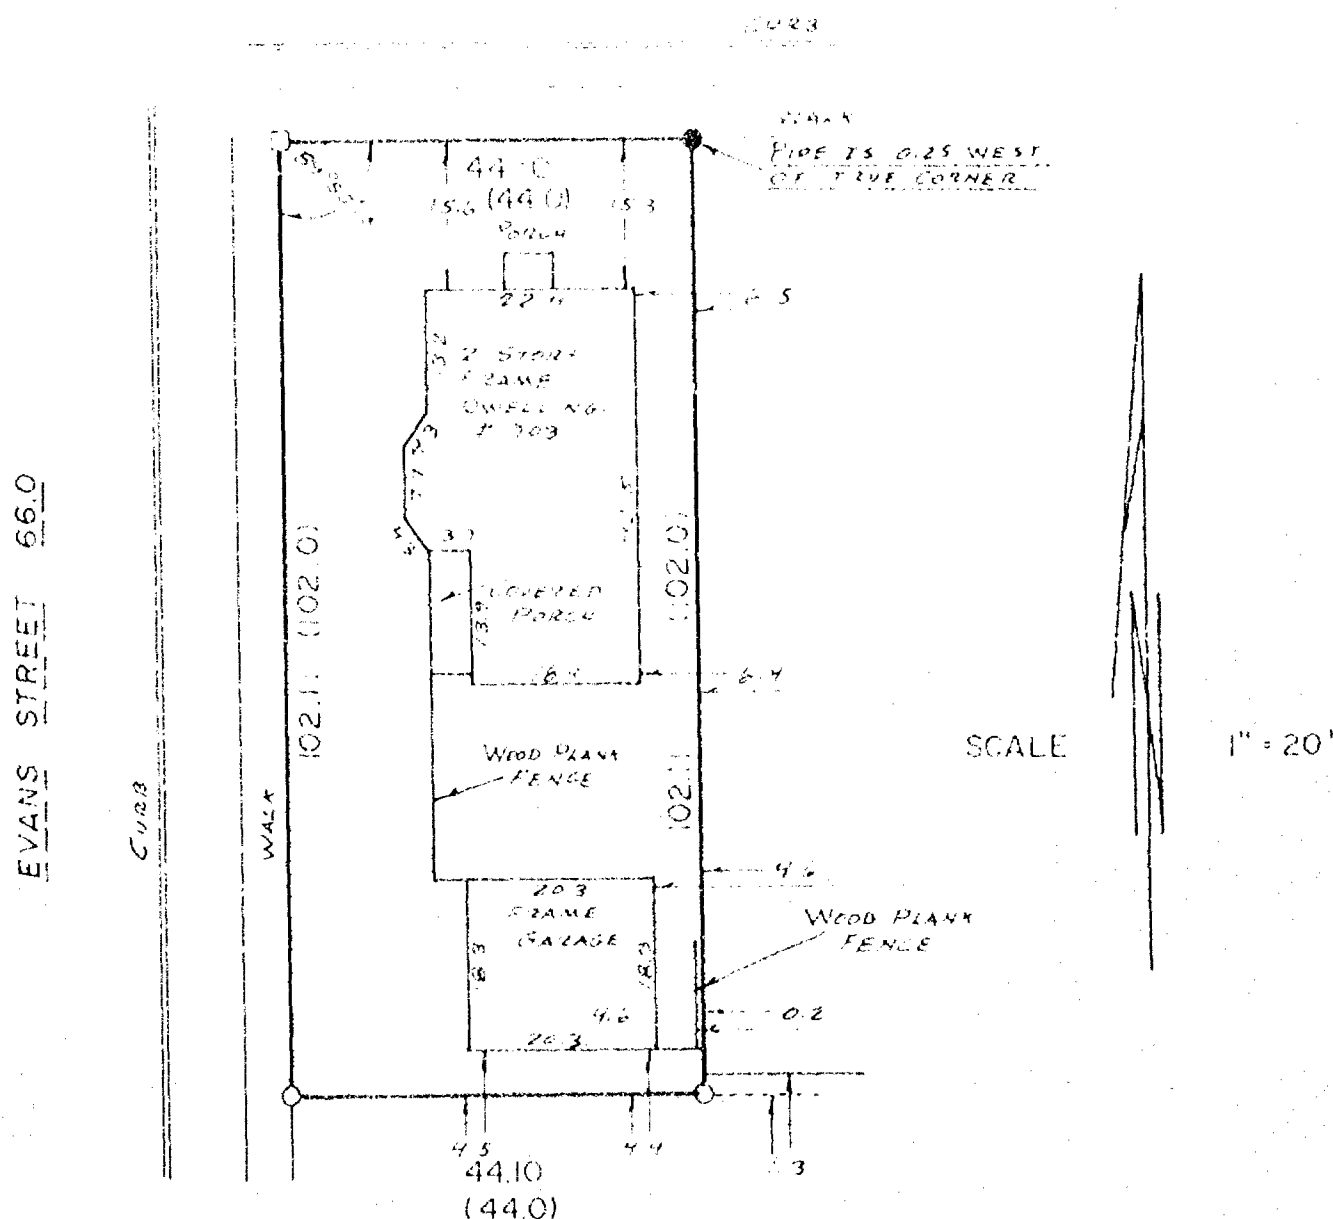


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.




**national survey & engineering**

417 NORTH SAWYER STREET / P.O. BOX 2963  
OSHKOSH, WISCONSIN 54903  
(414) 426-2800

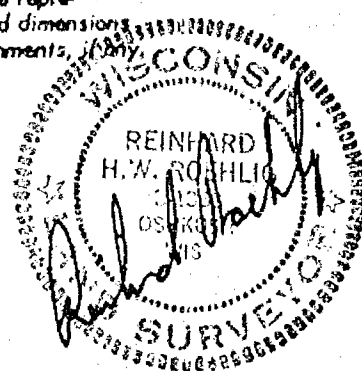


SURVEY  
for  
LINDA NOLAN  
of

Lot 20, Block 2 of City's Replat No. 4, 11th Ward, City of Oshkosh, Winnebago County, Wisconsin.

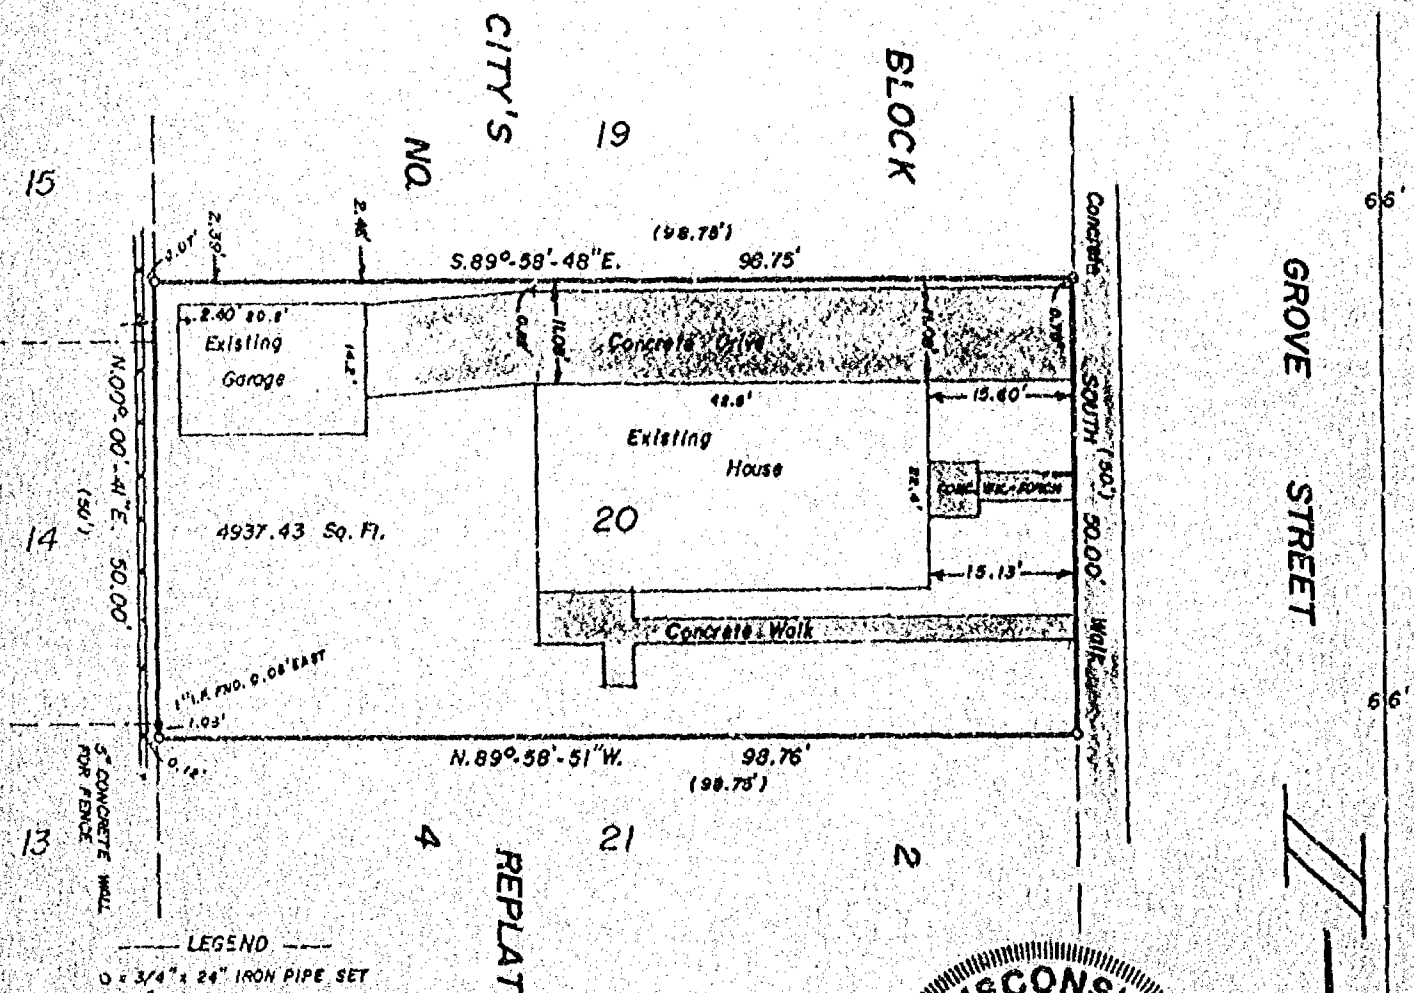

SURVEYOR'S CERTIFICATE:


I, Lawrence C. Kriescher, Wisconsin Registered Land Surveyor of Aero-Metric Engineering, Inc., certify that I have surveyed the above described property and that the map shown above is a true and accurate representation thereof to the best of my knowledge and belief.

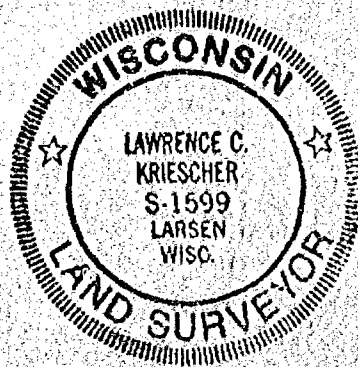

ALL BEARINGS REFERENCED TO THE WEST  
LINE OF GROVE ST. ASSUMED NORTH

AERO-METRIC ENGINEERING, INC.  
PHOTOGRAMMETRIC ENGINEERS  
LAND SURVEYORS  
SHEBOYGAN, WISCONSIN

Dated this 3rd day of November, 1989.  
*Lawrence C. Kriescher*  
WIS. REGISTERED LAND SURVEYOR S-1599  
NOTEBOOK III PAGE 76-78



L-1816

# PLAT OF SURVEY


DESCRIPTION OF PARCEL 1: THE NORTH 44.53 FEET OF LOT 16, BLOCK 4, CITY REPLAT #4, ALL IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

DESCRIPTION OF PARCEL 2: THE SOUTH 5.17 FEET OF LOT 16, BLOCK 4, CITY REPLAT #4, ALL IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

CLIENT: SUE SALM  
915 EVANS STREET  
OSHKOSH, WIS. 54901

## LEGEND

- = 3/4" x 24" SOLID ROUND IRON REBAR SET
- = 1/2" IRON PIPE FOUND
- = 1" IRON PIPE FOUND
- X = PAINT CROSS SET
- = CHISEL NOTCH SET

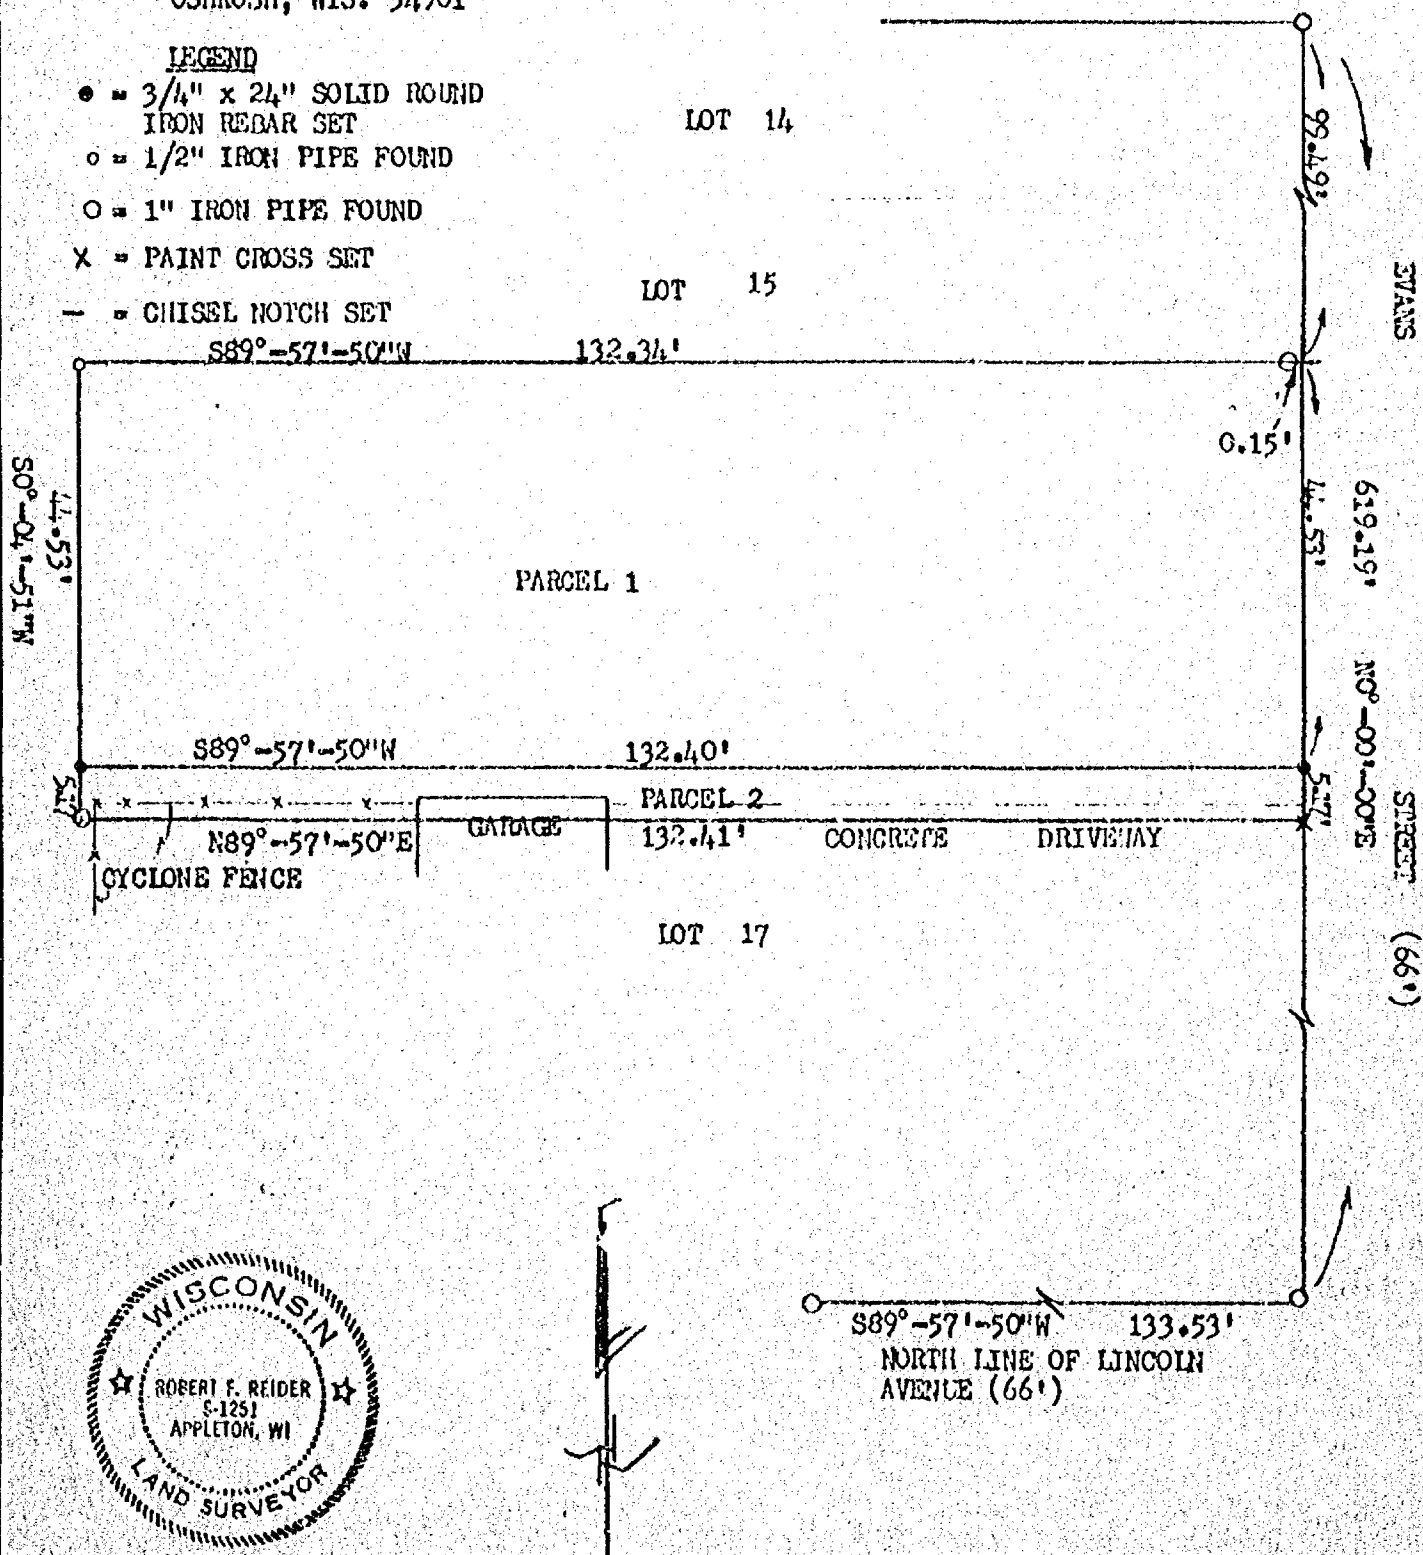

I HEREBY CERTIFY THAT I HAVE SURVEYED THE ABOVE DESCRIBED PROPERTY AS SHOWN ACCORDING TO THE OFFICIAL RECORDS AND THAT THIS PLAT OF SURVEY IS A CORRECT REPRESENTATION OF SAID SURVEY

Robert F. Reider 7/3/89



**CAROW LAND SURVEYING CO., INC.**

1837 W. WISCONSIN AVE., P.O. BOX 1297  
APPLETON, WISCONSIN 54912-1297  
PHONE 414-731-4168 FAX 731-5673

SCALE

1"=20'

DRAWN BY

cc rr EC

PROJECT NO

A896.137



# PLAT OF SURVEY

KNOWN AS 1125 EVANS STREET. BEING THE SOUTH 90.0 FT. OF THE NORTH 222.0 FT. OF THE EAST 131.50 FT. OF THAT PART OF THE N.E. 1/4 OF THE S.E. 1/4 OF SECTION 13, T18N, R16E, IN THE 11TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN BOUNDED ON THE NORTH BY THE SOUTH LINE OF NEW YORK AVENUE, ON THE EAST BY THE WEST LINE OF EVANS STREET, ON THE SOUTH BY THE NORTH LINE OF BALDWIN STREET AND ON THE WEST BY THE EAST LINE OF BOWEN STREET.


JUNE 27, 1988

SURVEY FOR MARCELLA BEDORE

SURVEY NO. 88-1276

● DENOTES 3/4 INCH DIAMETER IRON ROD, 24" LONG, WEIGHING NOT LESS THAN 1.13 LBS. PER LINEAL FOOT SET.

○ DENOTES 1 INCH DIAMETER PIPE FOUND.

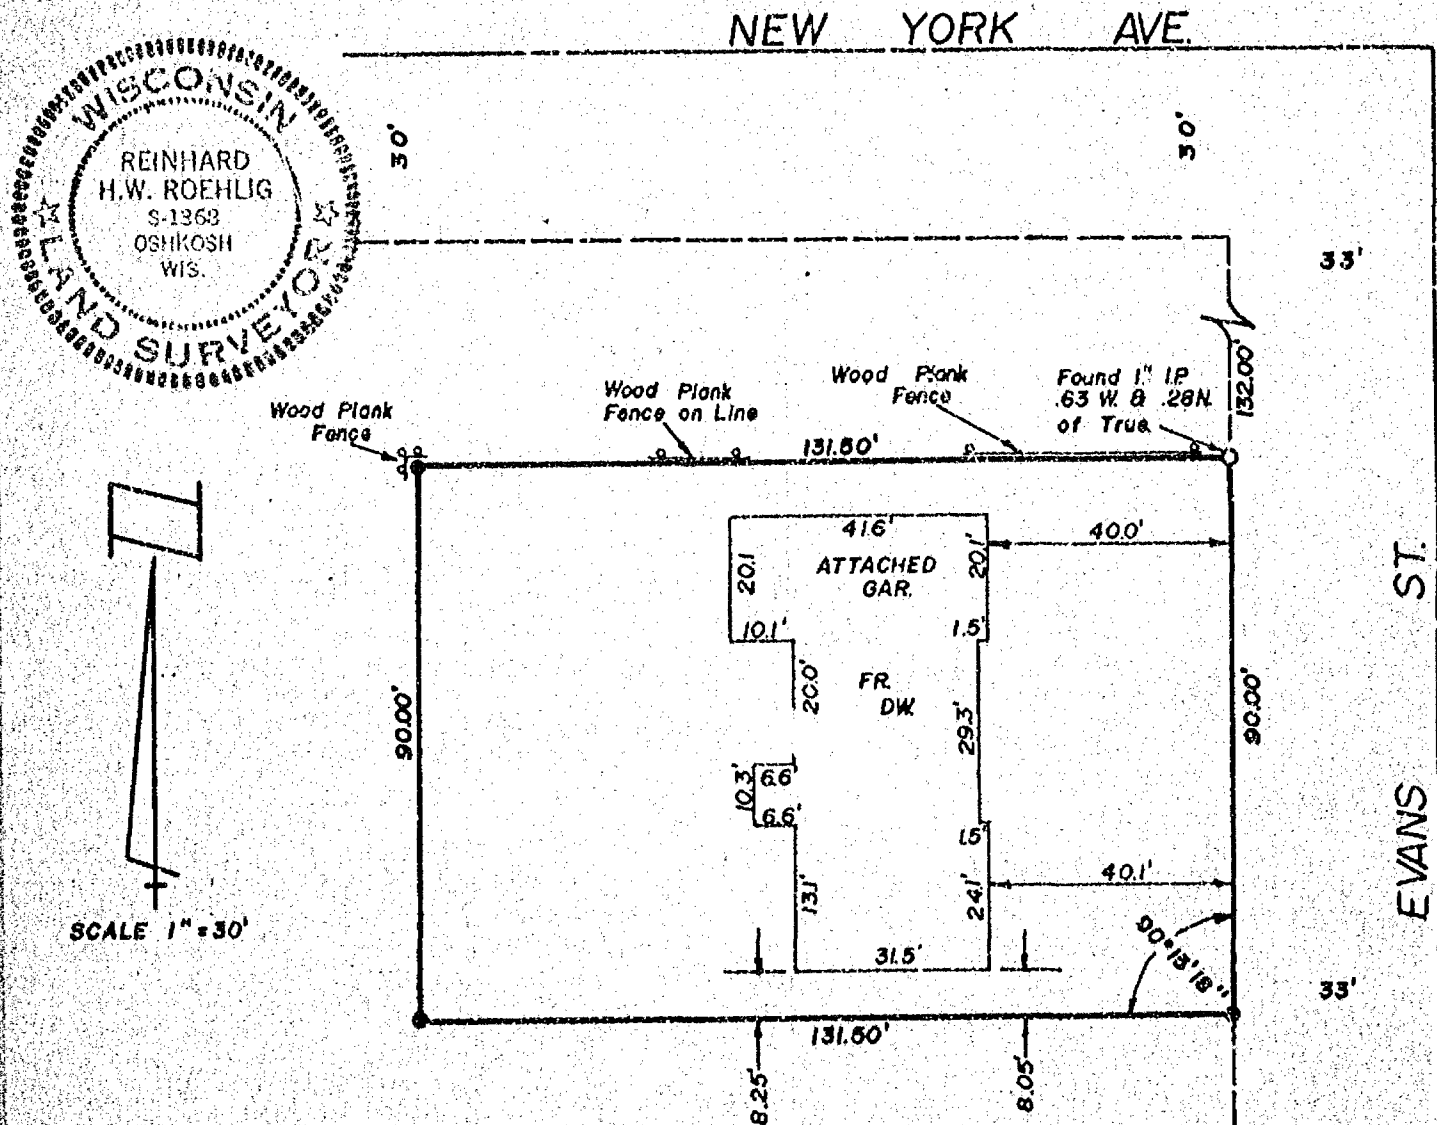

## SURVEYOR'S CERTIFICATE

I, REINHARD H. W. ROEHLIG, Registered Land Surveyor No. S-1368, hereby certify: That I have surveyed the property described hereon and that the above map is a true representation thereof and shows the size and location of the property, its exterior boundaries, the location and dimensions of all visible structures thereon, fences, apparent easements, roadways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the property, and also those who purchase, mortgage, or guarantee the title thereto within one (1) year from the date hereon, and as to them I certify the accuracy of said survey and map.

## SCHULER & ASSOCIATES

320 W. Northland Ave.  
Appleton, WI, 54912  
(414) 734-9107

2530 W. 20th Ave.  
Oshkosh, WI, 54904  
(414) 426-2800

REGISTERED LAND SURVEYOR

DATE 6/27/88

88-1276