KNOWN AS 1460 MARICOPA DRIVE, BEING LOT 743 IN THE 5th ADDITION TO WESTHAVEN, 13th WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

NOVEMBER 3, 1983


SURVEY FOR OSHKOSH SAVINGS APPLICANT: KISSINGER

MONUMENT WAIVER ON FILE

SURVEY NO. 1346

SURVERING ST

MARICOPA DRIVE (60.C)

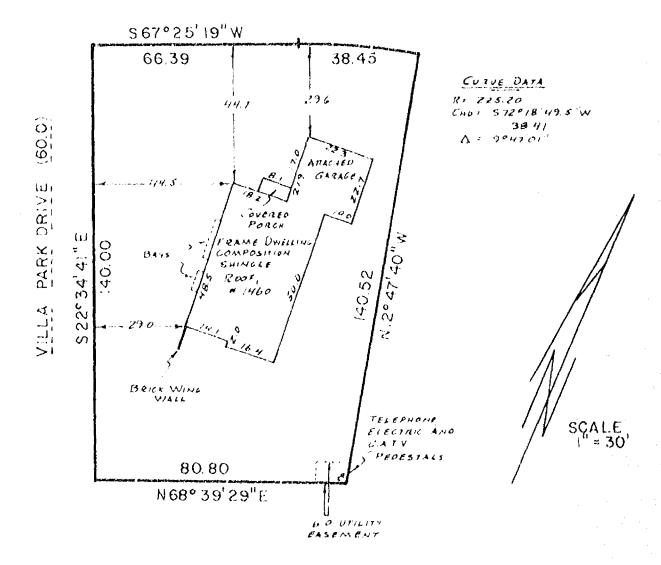

I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property.

This survey is made for the exclusive use of the present awners of the Property and also those who purchase, martgage, or guarantee the title thereto, within one (1) year from date hereof.



KNOWN AS 1850 DEERFIELD DRIVE. BEING LOT 790 IN THE 5TH ADDITION TO IN THE 13TH WARD, CITY WESTHAVEN, OF. OSHKOSH, WINNEBAGO COUNTY; WISCONSIN.


APRIL 23, 1986

SURVEY FOR CAMILLE ROGERS

SURVEY NO. 1725-8

---- DENOTES 3/4" DIAMETER IRON ROD FOUND AS SHOWN.

-- DENOTES I' DIAMETER, 20" LONG TRON PIPE SET.

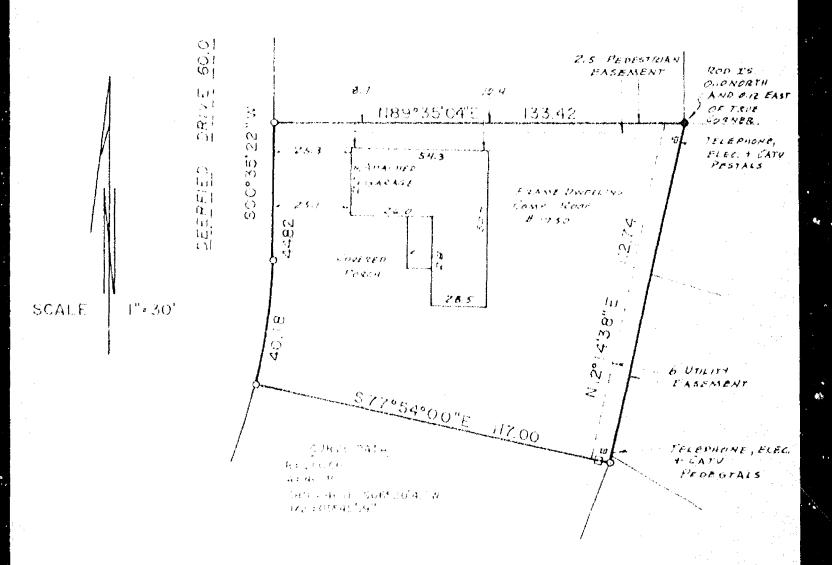

Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roodways and visible encrowchments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, martgage, or guarantee the title thereto, within one (1)

Year from date hereof.

REINHARD
HIW. RDEINHARD
USINFOSH
WIS.


national survey & engineering 417 NORTH SAWYER STREET / PO. BOX 2963 OSHKOSH, WISCONSIN 54903 (414) 426-2800

KNOWN IS 1650 VILLA PARK DRIVE, BEING LOT 722 IN THE 5TH ADDITION TO WESTHAVEN, 13TH WARD, CITY OF OSHROSH, WINNEBAGO COUNTY, WISCONSIN.

DECEMBER 28, 1984

SURVEY FOR OSHKOSH CAVINGS APPLICABLE HOMAS SULLIVAN MODUMENT WATTER ON FILE


SURVEY NO. 1585-14

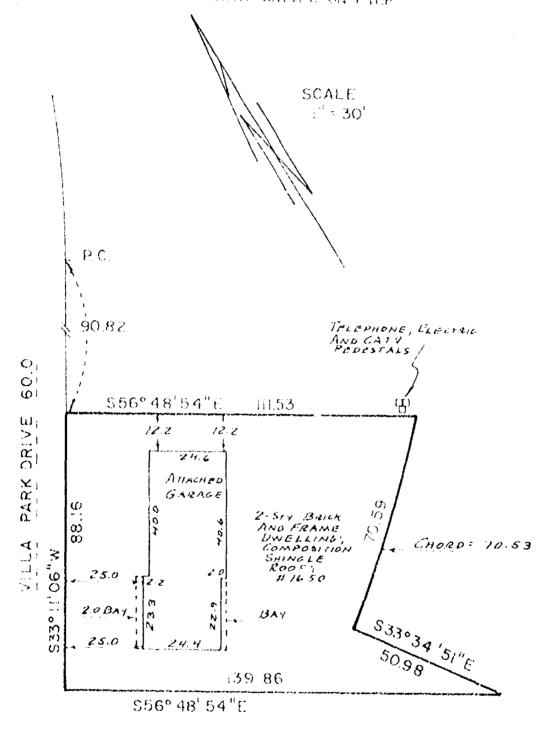

I Certify that I have surveyed the above described property (Property), and the above man is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and rocalways and visible encroachments, if any. This survey is made for the exclusive use of the present owners of the Property,

This survey is mode for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.





80.00 6. UTILITY EVERTEME 16.0 29.0 140.001 40.0 proposed 25' SETBACK, LINE drive 30.00 DRIVE DEERFTELD

Lot Seven Hundred Seventy-three (773) in FIFTH ADDITION TO WESTHAVEN, in the Thirteenth Ward, City of Oshkosh, Winnebago County, Wisconsin-

KRAEMER:

DEERFTEID DR.

NO BUILDING ENCROACIMENTS PRESENT

2 STORY HOUSE WITH ATTACHED GARAGE



I. ROBERT F. REIDER

certify that this mortgage inspection was made by me or under my direction and control of the described property on.

December 1, 1987 , according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. Oshkosh Savings & Loan in agreement with Carow Land Surveying Co., Inc. has waivered parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: Oshkosh Savings & Loan.

REVISIONS	Oshkosh Savi P.O. Box 80,	ngs & Loan Oshkosh, Wis.	54902		
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI54912				
	DRAWN BY MV-dw KO DV	SCALE 1"≃301	DRAWING NO.		
	APPD	DATE - A CA	S711-111	11	

Chapter A-E 5

MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for prop- A-E 5.02 U.S. public land survey monusety surveys

A-E 5.01 Minimum standards for property surveys. (1) Scors. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) Property survey, definition. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) Boundary Location. Every property survey should be made in accordance the with records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of bile, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) Descriptions. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoiners together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private cloim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

WISCONSIN ADMINISTRATIVE CODE

A-5.4


- (5) Mars A map shall be drawn for every property survey showing information developed by the survey and including the following elements:
 - (a) The map shall be drawn to a convenient scale;
 - (b) The map shall be referenced as provided in a. 59.61, Stats.;
- (c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)":
- (d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;
- (e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above:
- (f) The map shall hear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.
- (6) Measurements, (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.
- (b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.
- (c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.
- (d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.
- (e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.
- (7) Monuments. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. 15)-(e) and (6)-(e), Register, June, 1975, No. 234, eff. 7-1-75, au. (1)-(b), Register, January, 1942, No. 313, eff. 2-1-82; am: (1)-(b) and c. and recr. (2), Register, August, 1942, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) When monument record negatives. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320

Lot Seven Hundred Seventy-six (776) in FIFTH ADDITION TO WESTHAVEN, in the 13th Ward, City of Oshkosh, Winnebago County, Wisconsin.

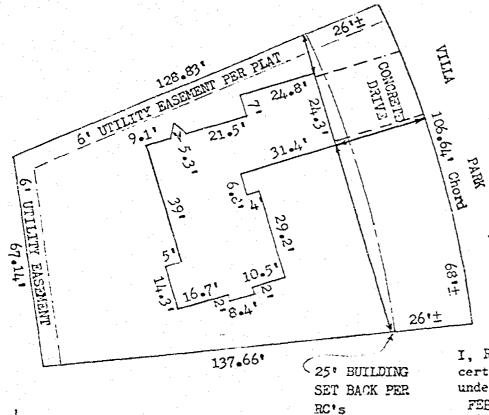

VAN DE LOO 1505 VILLA PARK DRIVE, OSHKOSH

NO BUILDING ENCROACHMENTS PRESENT

1 STORY HOUSE WITH AFTACHED GARAGE.



I, ROBERT F. REIDER

certify that this mortgage inspection was made by me or under my direction and control of the described property on. FEBRUARY 18, 1988 . according to the official records and that this drawing is a true representation of the principal building lines thereon and is accurate to the best of my knowledge and belief. Oshkosh Savings & Loan in agreement with Carow Land Surveying Co., Inc. has waivered parts of Administrative Code A-E 5.01 (3 through 7). THIS IS NOT A BOUNDARY SURVEY MOR INTENDED TO BE. THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF: Oshkosh Savings & Loan.

REVISIONS	Oshkosh Savings & Loan P.O. Box 80, Oshkosh, Wis. 54902						
	CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE APPLETON, WI54912						
	ec ko WW	SCALE 1"=30"	DRAWING NO.	To the			
	APPO	0ATE 2-18-88	882,84				

Chapter A-E 5

MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for propacts surveys

A-E 5.01 Minimum standards for property surveys. (1) Score. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) Property survey, Definition. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) Boundary Location. Every property survey should be made in accordance the with records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) Descriptions. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoiners together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

WISCONSIN ADMINISTRATIVE CODE

A-K &

- (5) Mars A man shall be drawn for every property survey showing information developed by the survey and including the following elements:
 - (a) The map shall be drawn to a convenient scale;
 - (b) The map shall be referenced as provided in s. 59.61, Stats.;
- (c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)":
- (d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;
- (e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above:
- (f) The map shall bear the stamp or seel and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.
- (6) Measurements. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.
- (b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.
- (c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.
- (d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.
- (e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.
- (7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.


History: Cr. Register, June, 1974, No. 222, eff. 7-3-74; am. (5). (e) and (6). (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1). (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1). (b). and r. and secr. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320

EMORTGAGE

SURVEY!

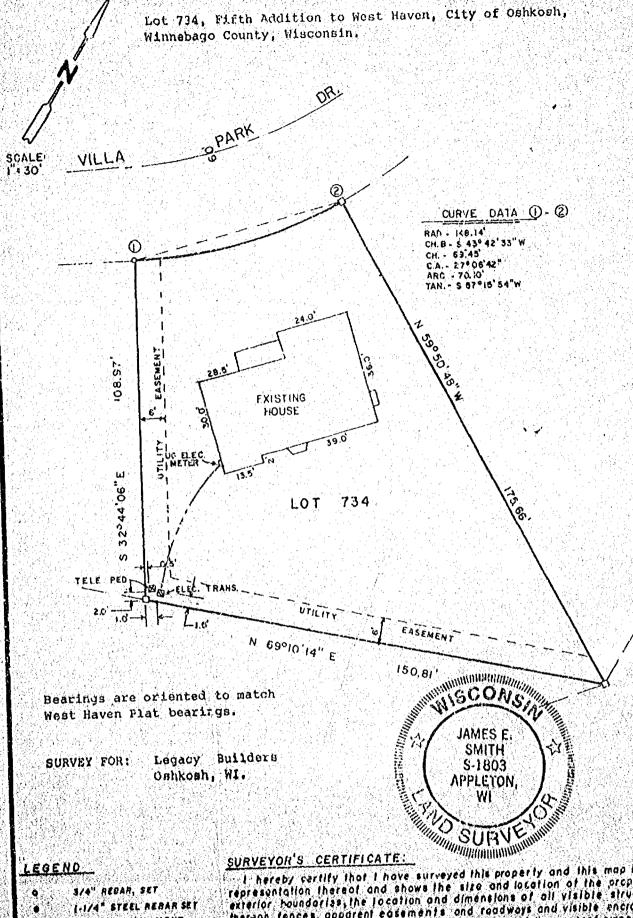

S/4" REBAR, SET

1.1/4" STEEL REBAR SET

BECTION MONUMENT

PA NAIL

I" IRON PIPE FOUND

E" INON PIPE FOUND

S/4" REBAR FOUND

1. U4" REBAR FOUND

PENCE

CHISCED "X"

MAILMOAD SPIKE RECORDED AS

I hereby certify that I have surveyed this property and this map is a true representation thereof and shows the size and location of the properly; its exterior boundaries, the location and dimensions of all visible structures thereon, fences, apparent easements and readways and visible encroachments, if any. This survey is made for the exclusive use of the present owner of the property, and also those who purchase, marigage or quadrated the title property, and also those who purchase, marigage or quadrated the title therests within one (i) year from date hereoft and as to them I hereby certify that said survey and map were made in accordance with acceptable professional Standards and that the information contained thereof the best of my knowledge, information and belief a true and accurate ripresentation thereof.

LAND SURVEYOR

Martenson & Eisele, Inc.

CONSULTING ENGINEERING & LAND SURVEYING
1919 AMERICAN COURT
NEENAH WIS. 54956
PHONE - 731-0381

FIELD BOOK 82 PROJECT NO. 221-031

THIS INSTRUMENT WAS DRAFTED BY: BAW

FOR

RICK HANSEN


of

LOT 707 IN THE FIFTH ADDITION TO WESTHAVEN, 13TH WARD, CITY OF OSHKOSH, WINNEBAGO
COUNTY, WISCONSIN

Registered

Kel Cold
Street Wisc SUFF Communication that I have surveyed the above described property and that the map shown below is a true and accurate representation thereof to the best of my knowledge and belief. Dated this gnk day of Mny _, 1989. Wisconsin Registered Land Surveyor, S-1599 Lawrence C. Kriescher MARICOPA 706 700.FC MESTULVEN GOLF COURSE S. 89°-22°- 22°E. (N.81°-24'38'M. 20805'R) 207.95 N.00°-35'-16"E 100.08 00-35-ZL W. (H.00'-35'-22'4) 707 ASSIGNED ZO, 815 SA. FT. . 100.08 (N 89 - 24 - 35"W. E0803 A.) じれて N. 89 - 22 - 22 "W. 208.03 708 · LEGEND ---" I's 24" I SUN PIPE SET : I' IRON PIPE FNO 1 14 ROD FAD. = 2' IKON PIFE FNO. MAY 2, 1989 Scals: 14, 50') = Recorded Bearing & or Distance. AERO: METRIC LUGINEERING, INC. PHOTOGRAMMETRIC ENGINEERS LAND SURVEYORS Lawrence C. Kriescher WIS REGISTERED LAND SURVEYOR S-1549 SHÉBOYGAN, WISCONSIN PE SDAS SO NOBSTON

L-1746

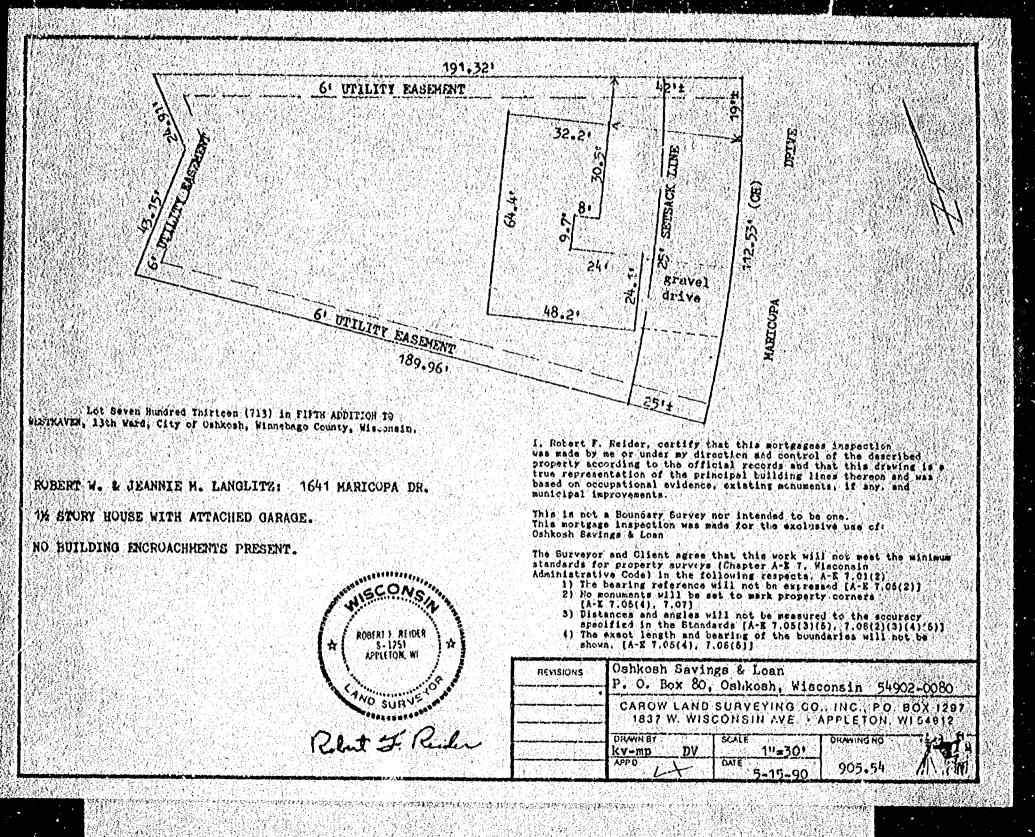

LOT CORNER LOCATION SURVEY ATTORNEY FINTAN M. FLANAGAN of

LOT 713, 5TH ADDITION TO WESTHAVEN, 13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN

CURVE DATA FOR LOT 713

439.66 Radius N.29°-05'-38.5"E Chord Bearing 112.53' 14°-42'-17" Chord Length Central Angle

112,84 Arc Length 711 820.35' 36°E 206.40 712 1"= 100" Legend 10527 = 2" Iron pipe found N.89% • : I" iron pipe found RECORD o : 1" x 24" iron pipe set

SURVEYOR'S CERTIFICATE:

I, Anthony P. Lulloff, Registered Land Surveyor of Aero-Metric Engineering, Inc., certify that I have recovered the Lot Corners and reset the Northeast Corner of Lot 713, 5th Addition to Westhaven and that the map above is a true and accurate representation thereof to the best of my knowledge and belief.

JERO METRIC ENGINEERING, INC. PHOTOGRAMMETRIC ENGINEERS LAND SURVEYORS SHEBOYGAN, WISCONSIN


Dated this 22 ndday of Formany, 1990. WIS REGISTERED LAND SURVEYUN 5- 1655 NOTEBOOX 113 PAGE 69.

L • 1829

FOUNDATION SURVEY

LOT 728, 5TH AUDITION TO WESTHAVEN, 13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

SURVEYED FOR LAVONNE KNITT 1125 MALLARD AVE. OSHKUSH, VI 54901

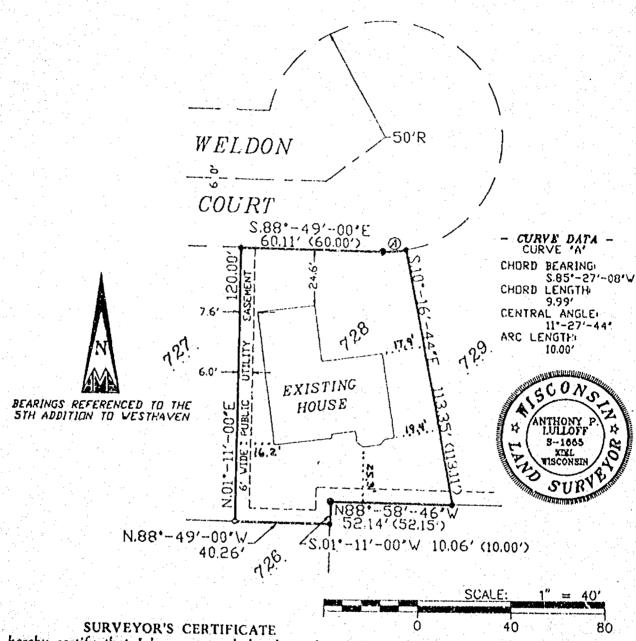

I hereby certify that I have surveyed the above described property and that the above map is a true representation there-of and shows the size and location of the property, its exterior boundaries, the location of all visible structures and described all principal buildings thereon, boundary fences, apparent easements, roadways and visible encroachments, if any.

This survey is made for the use of the present owners of the property, and also those who purchase, mortgage, or guarantee the title thereto within one (1) year from date hereof.

Pated this 5th day of February, 1993
Revised 2/9/93

- LEGEND -

- o = 1'x24' IRON PIPE SET
- . = E' IRON PIPE FOUND
- = 3/4" REBAR FOUND
- () = RECORDED INFORMATION


539 NORTH MADISON STREET CHILTON VISCONSIN 53014 414-849-7708 600-472-5313 Anthony Lulloff - S-yes

lero—metric ENGINEERING, INC.

CHILTON
LAND PLANNING & DESIGN DIVISION
PROPERTY SURVEYS & SUBDIVISIONS
ENGINEERING DESIGN SERVICES
LAND INFORMATION SYSTEMS

PROJECT FILE: 2930119
DWG. FILE: KNITT
DRAFTED BY: S.S.
DATE: 02-05-93
NOTEBOOK: P-126 PAGE: 24
L- 2140

LOT 488 IN THE FIFTH ADDITION TO WESTHAVEN, IN THE 13TH WARD, CITY OF OSHKOSH, WHINEBAGO COUNTY, WISCONSIN. SURVEY FOR FINTAN FLANAGAN AND APRIL 15, 1904 NO. 2478 GARRY DECKER

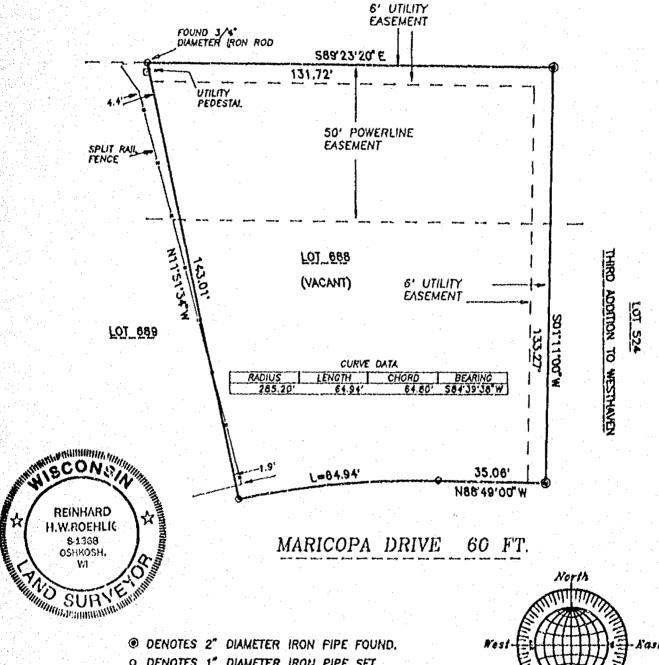

DENOTES 1" DIAMETER IRON PIPE SET UNLESS OTHERWISE NOTED.


Surveyor's Certificate

i, Reinhard Roehlig, Wisconsin Repistered Land Surveyor, certify that I have surveyed the above described property and that the obeve map is a correct representation thereof and shows the size and location of the property, its exterior boundaries, the size and location of the property, its exterior boundaries, the size and dimensions of all visible structures thereon, boundary forces, apparent easements and roadways and visible encreechments, if any.

This survey is made for the exclusive with property and also those who purcha title thereto, within one (1) year from it

4-15-94

Reinhard Roshlig, Registered Land Surveyor \$-1368



South

SCALE: 1" = 30'

APRIL 15, 1894

ROEHLIG

LAND SURVEYING CONSULTING LTD.

417 North Sawyer Street * Oshkosh WI * 54901 (414) 233-2884

NO. 2476

