

CITY OF OSHKOSH - 13th Ward

"Westhaven - First Addition"

Sheed.

No. 2-150C

HASTINGS, MN

LOS ANGELES-CHICAGO-LOGAN, OH

MCGREGOR, TX-LOCUST GROVE, GA

U.S.A.

M

PLAT OF SURVEY

KNOWN AS 1377-1379 MARICOPA DRIVE. BEING LOT 292 IN THE FIRST ADDITION TO WESTHAVEN, IN THE 13TH WARD, WINNEBAGO COUNTY, WISCONSIN.

SEPTEMBER 10, 1984

SURVEY FOR FIRST SAVINGS
APPLICANT: GEORGE REISCHL
MONUMENT WAIVER ON FILE

SURVEY NO. 1526-M

MARICOPA DRIVE 60.0

389° 32' 36" E

120.00

40.4

110.0

31.3

68.5

2-FAMILY FRAME AND
STONE DWELLING; GMP.
SHINGLE ROOF
#1377-1379

68.5

4.4

22.0

4.6

22.0

FRAME GARAGES
COMPOSITION
SHINGLE ROOFS

30.0

24.1

30.0

24.1

7.4

7.3

SCALE

1" = 30'

S00° 27' 24" W

200.00

200.00

S00° 27' 24" W

TELEPHONE, ELECTRIC
AND CABLE PEDESTALS

4.8

5.0

0.1

N89° 32' 36" W

120.00

CHAIN LINK FENCE

10' UTILITY
EASEMENT

I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.




national survey & engineering

417 NORTH SAWYER STREET / PO BOX 2963

OSHKOSH, WISCONSIN 54903

(414) 426-2800

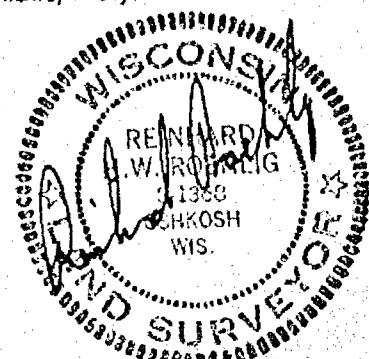

PLAT OF SURVEY


KNOWN AS 1015 CUMBERLAND TRAIL. BEING LOT 177 IN THE FIRST ADDITION TO WESTHAVEN, IN THE 13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.

MAY 3, 1986

SURVEY FOR KIM FLECHER

SURVEY NO. 1751-B

- DENOTES 1" DIAMETER IRON PIPE FOUND AS SHOWN.
○----- DENOTES 1" DIAMETER, 24" LONG IRON PIPE SET.
□----- DENOTES CROSS CHISELED IN CONCRETE.

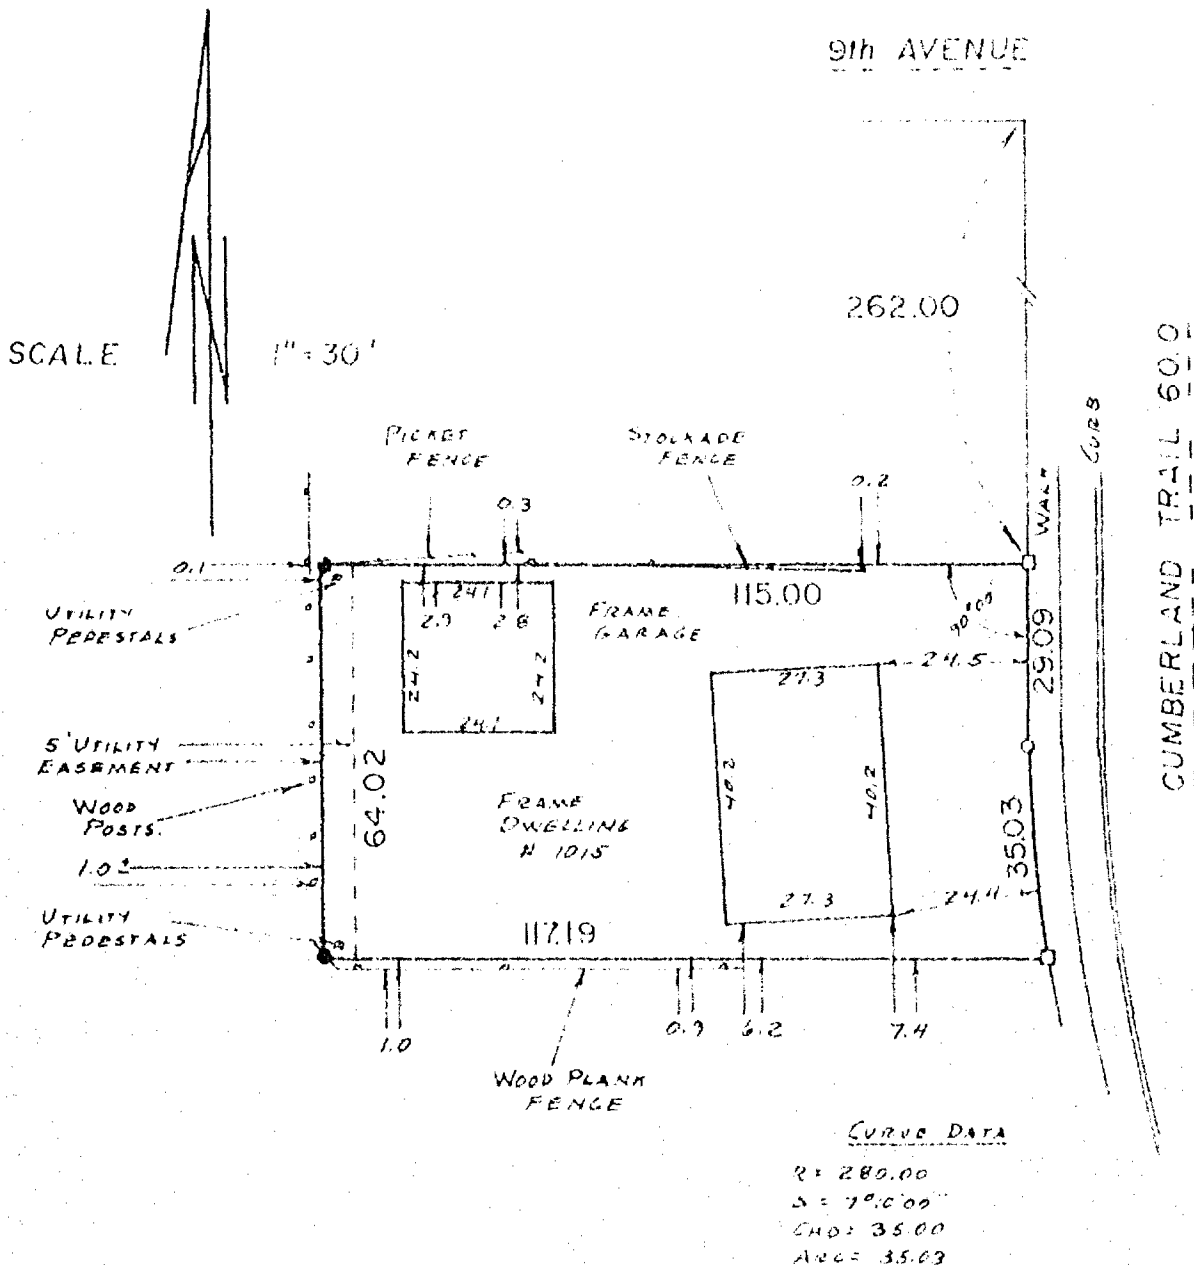


I Certify that I have surveyed the above described property (Property), and the above map is a true representation thereof and shows the size and location of the Property, its exterior boundaries, the location and dimensions of all visible structures thereon, boundary, fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the Property, and also those who purchase, mortgage, or guarantee the title thereto, within one (1) year from date hereof.



national survey & engineering

417 NORTH SAWYER STREET / P.O. BOX 2963
OSHKOSH, WISCONSIN 54903
(414) 426-2800

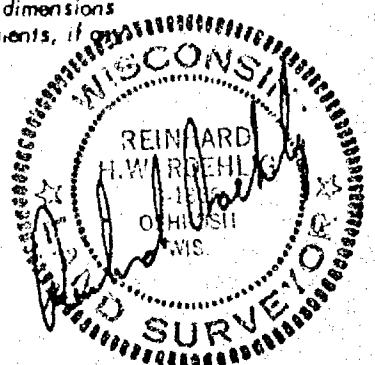


DESCRIPTION: LOT 142, FIRST ADDITION TO WESTHAVEN,
13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN.


2 STORY HOUSE WITH ATTACHED GARAGE

NO BUILDING ENCROACHMENTS PRESENT

STAETH: 2450 KINGSTON PLACE
OSHKOSH, WISCONSIN.



Robert F. Reider

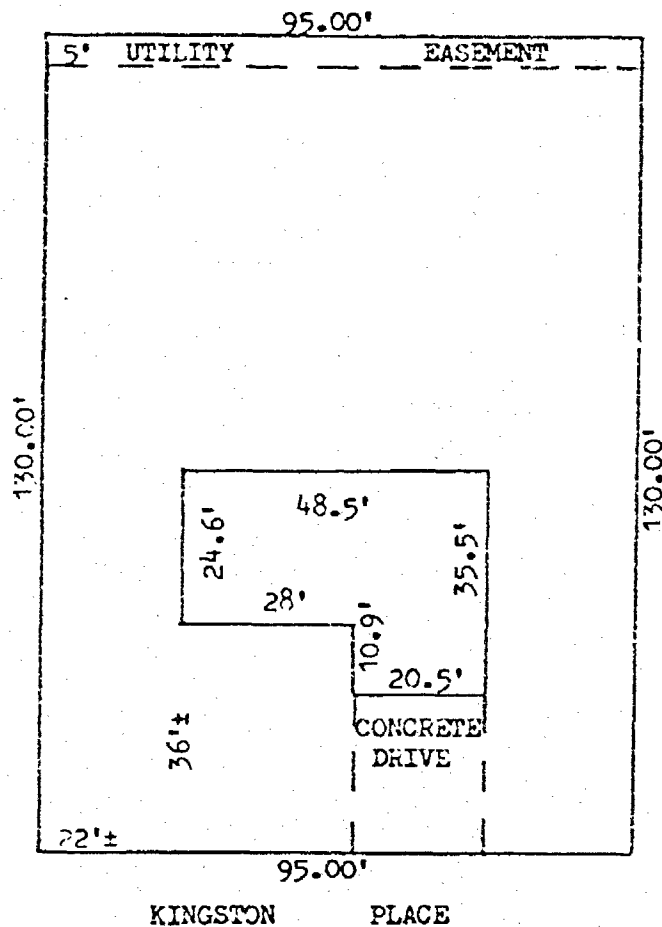

I, ROBERT F. REIDER
certify that this mortgage inspection was made by me or
under my direction and control of the described property on,
JULY 25, 1985, according to the official records
and that this drawing is a true representation of the
principal building lines thereon and is accurate to the
best of my knowledge and belief.
in agreement with Carow Land Surveying Co., Inc. has
waivered parts of Administrative Code A-E 5.01 (3 through 7).
THIS IS NOT A BOUNDARY SURVEY NOR INTENDED TO BE.
THIS MORTGAGE INSPECTION IS MADE FOR THE EXCLUSIVE USE OF:
First Gibraltar Mortgage Co.

REVISIONS	FIRST GIBRALTAR MORTGAGE CO. 54 PARK PLACE, APPLETON, WISCONSIN 54915 CAROW LAND SURVEYING CO., INC., P.O. BOX 1297 1837 W. WISCONSIN AVE. • APPLETON, WI 54912		
	DRAWN BY	SCALE	DRAWING NO.
	mc-ko MV	1"=30'	857-304
	APPRO	DATE	
		2-30-85	

Chapter A-E 5

MINIMUM STANDARDS FOR PROPERTY SURVEYS

A-E 5.01 Minimum standards for property surveys. A-E 5.02 U.S. public land survey monument record.

A-E 5.01 Minimum standards for property surveys. (1) Scope. The minimum standards of this section apply to every property survey performed in this state except that,

(a) Where other standards for property surveys are prescribed by statute, administrative rule or ordinance, then such standards shall govern; and

(b) The land surveyor and his or her client or employer may agree in a signed statement to exclude any land surveying work from the requirements of this section except the preparation of a U.S. Public Land Survey Monument Record, providing any map prepared by the land surveyor for the client or employer includes a note which states that an agreement to exclude work from the requirements of this section has been made, the names of the parties making the agreement and a description in plain language of the requirements not complied with.

(2) PROPERTY SURVEY, DEFINITION. In this section, "property survey" means any land surveying which includes as one of its principal purposes describing, monumenting, locating the boundary lines of or mapping one or more parcels of land. The term includes the restoration, perpetuation or reestablishment of a U.S. public survey corner.

(3) BOUNDARY LOCATION. Every property survey should be made in accordance with records of the register of deeds as nearly as is practicable. The surveyor shall acquire data necessary to retrace record title boundaries such as deeds, maps, certificates of title, and center line and other boundary line locations. The surveyor shall analyze the data and make a careful determination of the position of the boundaries of the parcel being surveyed. The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of such survey with the analysis. The surveyor shall set monuments marking the corners of such parcel unless monuments already exist at such corners.

(4) DESCRIPTIONS. Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing definite and unequivocal identification of lines or boundaries. The description must contain necessary ties to adjoining together with data of dimensions sufficient to enable the description to be mapped and retraced and shall describe the land surveyed by government lot, recorded private claim, quarter-quarter section, section, township, range and county, and by metes and bounds commencing with some corner marked and established by the U.S. public land survey; or if such land is located in a recorded subdivision or recorded addition thereto, then by the number or other description of the lot, block or subdivision thereof which has been previously tied to a corner marked and established by the U.S. public land survey.

Register, August, 1982, No. 320

(5) MAPS. A map shall be drawn for every property survey showing information developed by the survey and including the following elements:

(a) The map shall be drawn to a convenient scale;

(b) The map shall be referenced as provided in s. 59.61, Stats.;

(c) The map shall show the exact length and bearing of the boundaries of the parcels surveyed. Where the boundary lines show bearings, lengths or locations which vary from those recorded in deeds, abutting plats, or other instruments there shall be the following note placed along such lines, "recorded as (show recorded bearing, length or location)";

(d) The map shall show and describe all monuments necessary for the location of the parcel and shall indicate whether such monuments were found or placed;

(e) The map shall identify the person for whom the survey was made, the date of the survey, and shall describe the parcel as provided in (4), above;

(f) The map shall bear the stamp or seal and signature of the land surveyor under whose direction and control the survey was made with a statement certifying that the survey is correct to the best of his knowledge and belief.

(6) MEASUREMENTS. (a) Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.

(b) The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.

(c) In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles shall not differ from the theoretical sum by more than 120 seconds, whichever is smaller.

(d) Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000.

(e) Bearings or angles on any property survey map shall be shown to the nearest minute; distances shall be shown to the nearest 1/100th foot.

(7) MONUMENTS. The type and position of monuments to be set on any survey shall be determined by the nature of the survey, the permanency required, the nature of the terrain, the cadastral features involved, and the availability of material.

History: Cr. Register, June, 1974, No. 222, eff. 7-1-74; am. (5) (e) and (6) (e), Register, June, 1975, No. 234, eff. 7-1-75; am. (1) (b), Register, January, 1982, No. 313, eff. 2-1-82; am. (1) (b) and e. and rec. (2), Register, August, 1982, No. 320, eff. 9-1-82.

A-E 5.02 U.S. public land survey monument record. (1) WHEN MONUMENT RECORD REQUIRED. A U.S. public land survey monument record shall be prepared as part of any land survey which includes or requires the perpetuation, restoration or reestablishment of a U.S. public land survey corner, and, either,

Register, August, 1982, No. 320


PLAT OF SURVEY

KNOWN AS 1200 HERITAGE TRAIL. BEING LOT 245 IN THE FIRST ADDITION TO WESTHAVEN, IN THE 13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN. SAID PARCEL IS SUBJECT TO ALL EASEMENTS AND RESTRICTIONS OF RECORD.

JULY 22, 1991

SURVEY FOR JIM BOCHINSKI

NO. 1988

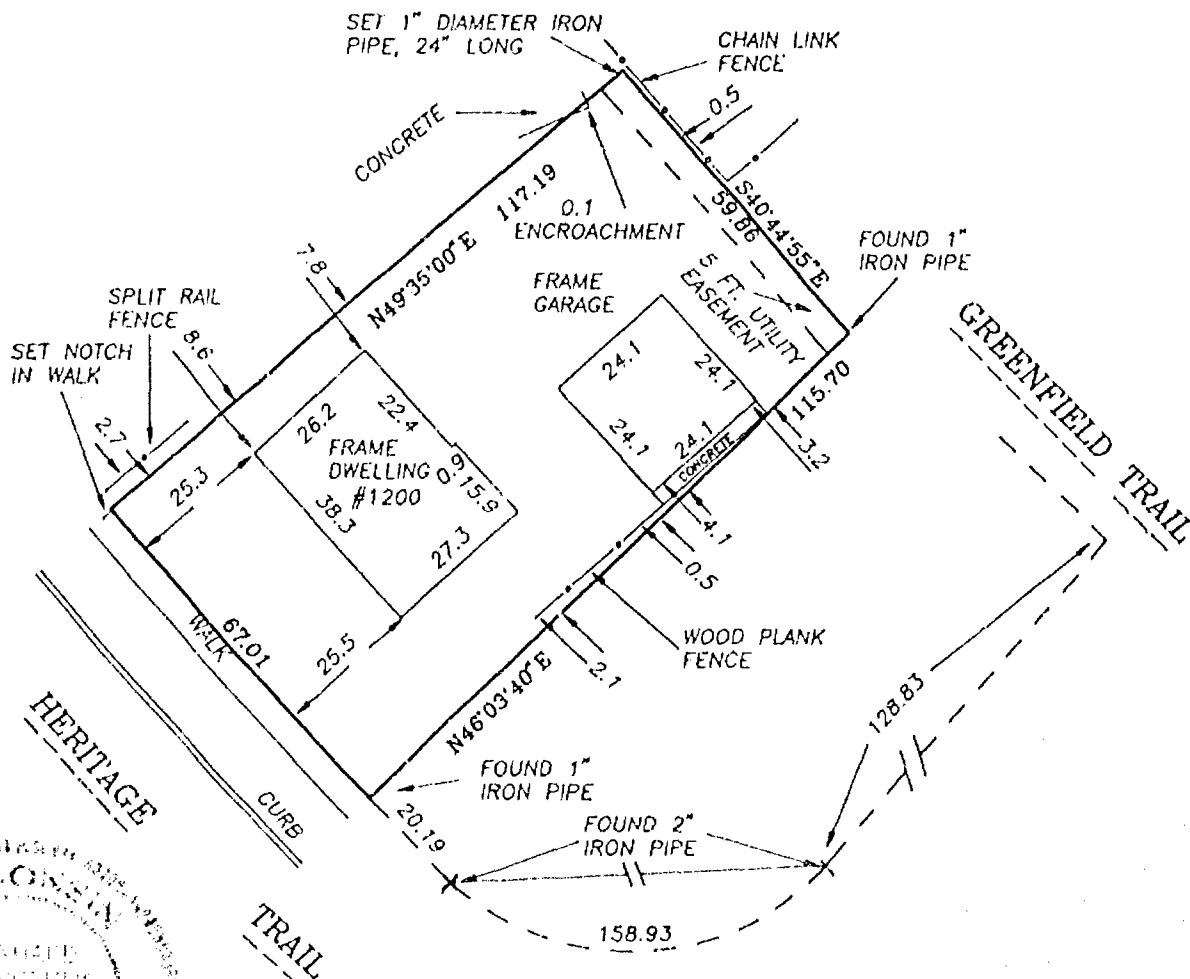



Surveyor's Certificate

I, Reinhard Roehlig, Wisconsin Registered Land Surveyor, certify that I have surveyed the above described property and that the above map is a correct representation thereof and shows the size and location of the property, its exterior boundaries, the locations and dimensions of all visible structures thereon, boundary fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the property and also those who purchase, mortgage or guarantee title thereto, within one (1) year from the date hereof.

7-22-91
Date

Reinhard Roehlig
Reinhard Roehlig, Registered
Land Surveyor S-1588



SCALE: 1" = 30'

NO. 1988

ROEHLIG

LAND SURVEYING
&
CONSULTING

417 North Sawyer Street • Oshkosh WI • 54901
(414) 233-2884


PLAT OF SURVEY

KNOWN AS 1420 MARICOPA, BEING LOT 281 AND THE NORTHERLY 5 INCHES OF LOT 280 IN THE FIRST ADDITION TO WESTHAVEN, IN THE 13TH WARD, CITY OF OSHKOSH, WINNEBAGO COUNTY, WISCONSIN. ALSO THAT PART OF LOT 282 IN SAID FIRST ADDITION TO WESTHAVEN DESCRIBED AS FOLLOWS. BEGINNING AT THE S.W. CORNER OF LOT 282, THENCE SOUTH 82°06'50" EAST ALONG THE SOUTHERLY LINE OF SAID LOT 182.17 FT. TO THE S.E. CORNER OF SAID LOT, THENCE NORTH 01°57'39" EAST ALONG THE EASTERLY LINE OF SAID LOT 14.60 FT., THENCE WESTERLY TO THE PLACE OF BEGINNING.

SEPTEMBER 7, 1993

SURVEY FOR SANDRA STRATZ

NO. 2376

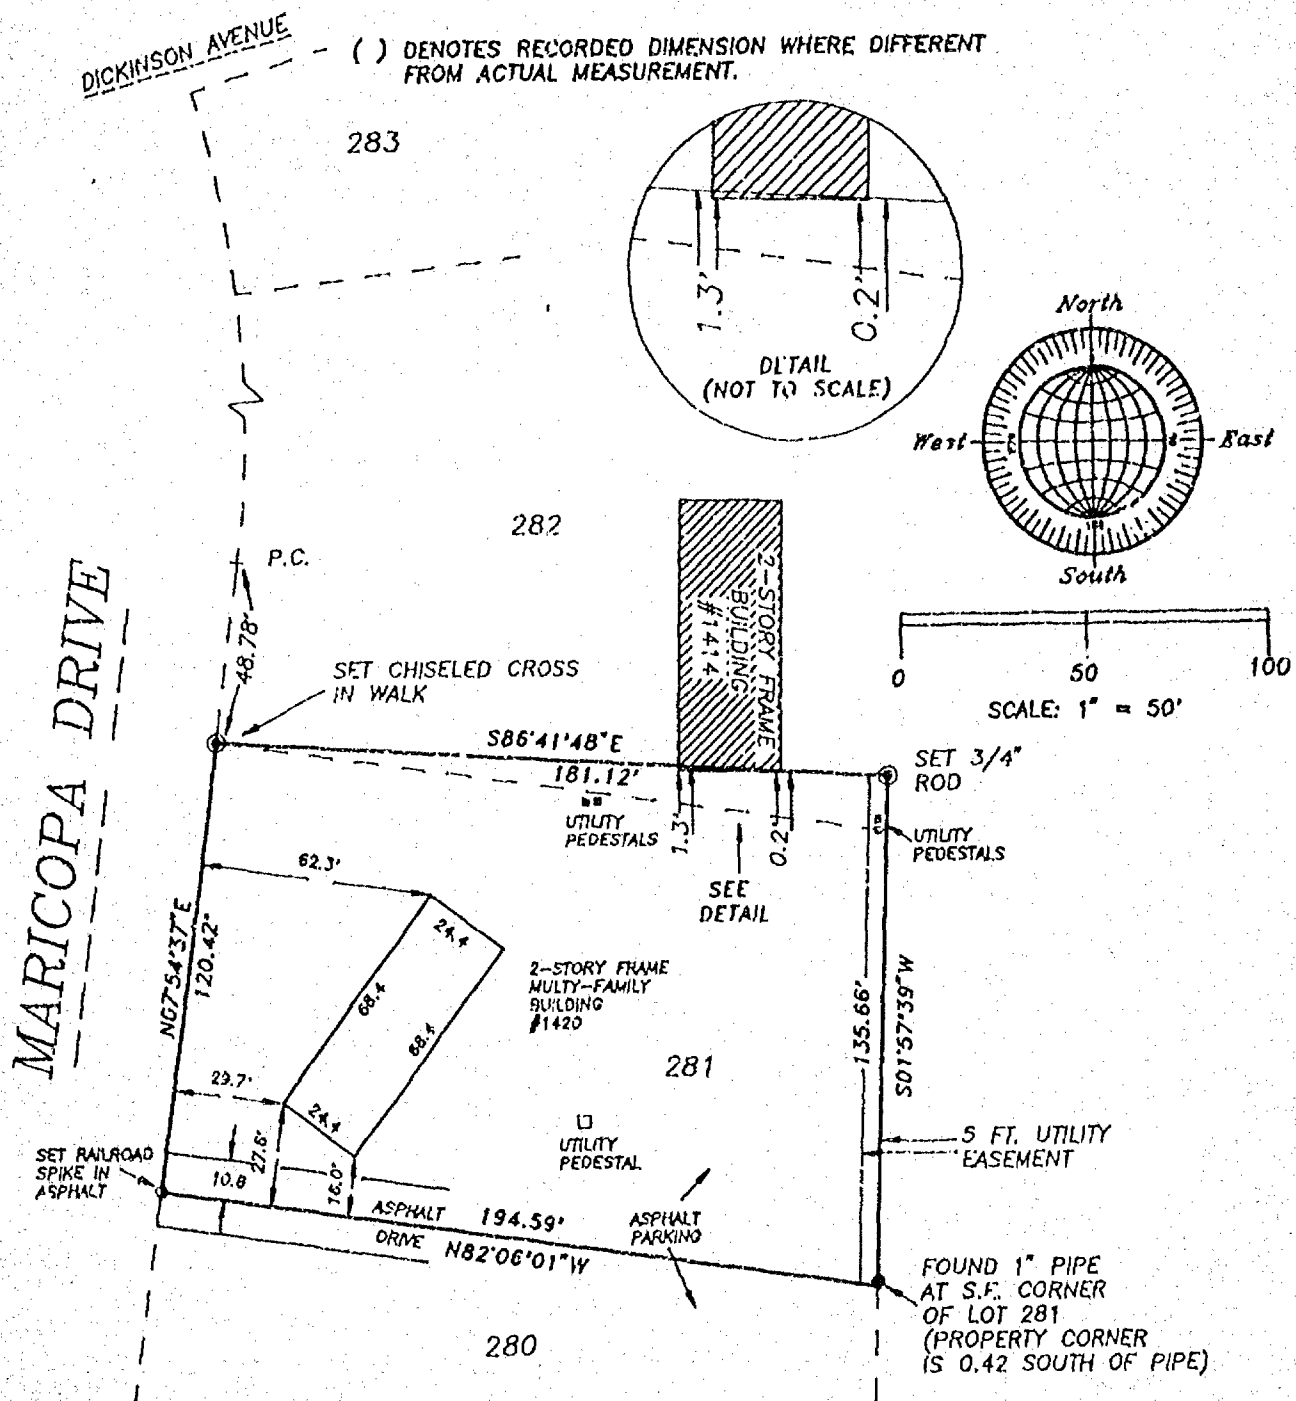

Surveyor's Certificate

I, Reinhard Roehlig, Wisconsin Registered Land Surveyor, certify that I have surveyed the above described property and that the above map is a correct representation thereof and shows the size and location of the property, its exterior boundaries, the locations and dimensions of all visible structures thereon, boundary fences, apparent easements and roadways and visible encroachments, if any.

This survey is made for the exclusive use of the present owners of the property and also those who purchase, mortgage or guarantee title thereto, within one (1) year from the date hereof.

9-7-93

Date



SEPTEMBER 7, 1993

ROEHLIG
LAND SURVEYING
&
CONSULTING LTD.

417 North Sawyer Street * Oshkosh WI * 54901

(414) 233-2884

NO. 2376A