


12 - 19 - 14

NO.	SURVEYED FOR	SURVEYOR	DATE	PLAT NO.	CERTIFIED MAP NO.	SURVEYS		SURVEY LOCATION
						VOL.	PAGE	
	Unlisted	Snyder	8-9-74					12-T19N-R14E
	H. V. Clark	Hartman	3-2-79					12-T19N-R14E SW/4

12-19-14

Plat of Survey

OWNER: M.E. & H.M. Blink
8286 Quigley Rd.
Winneconne, Wisc. 54986

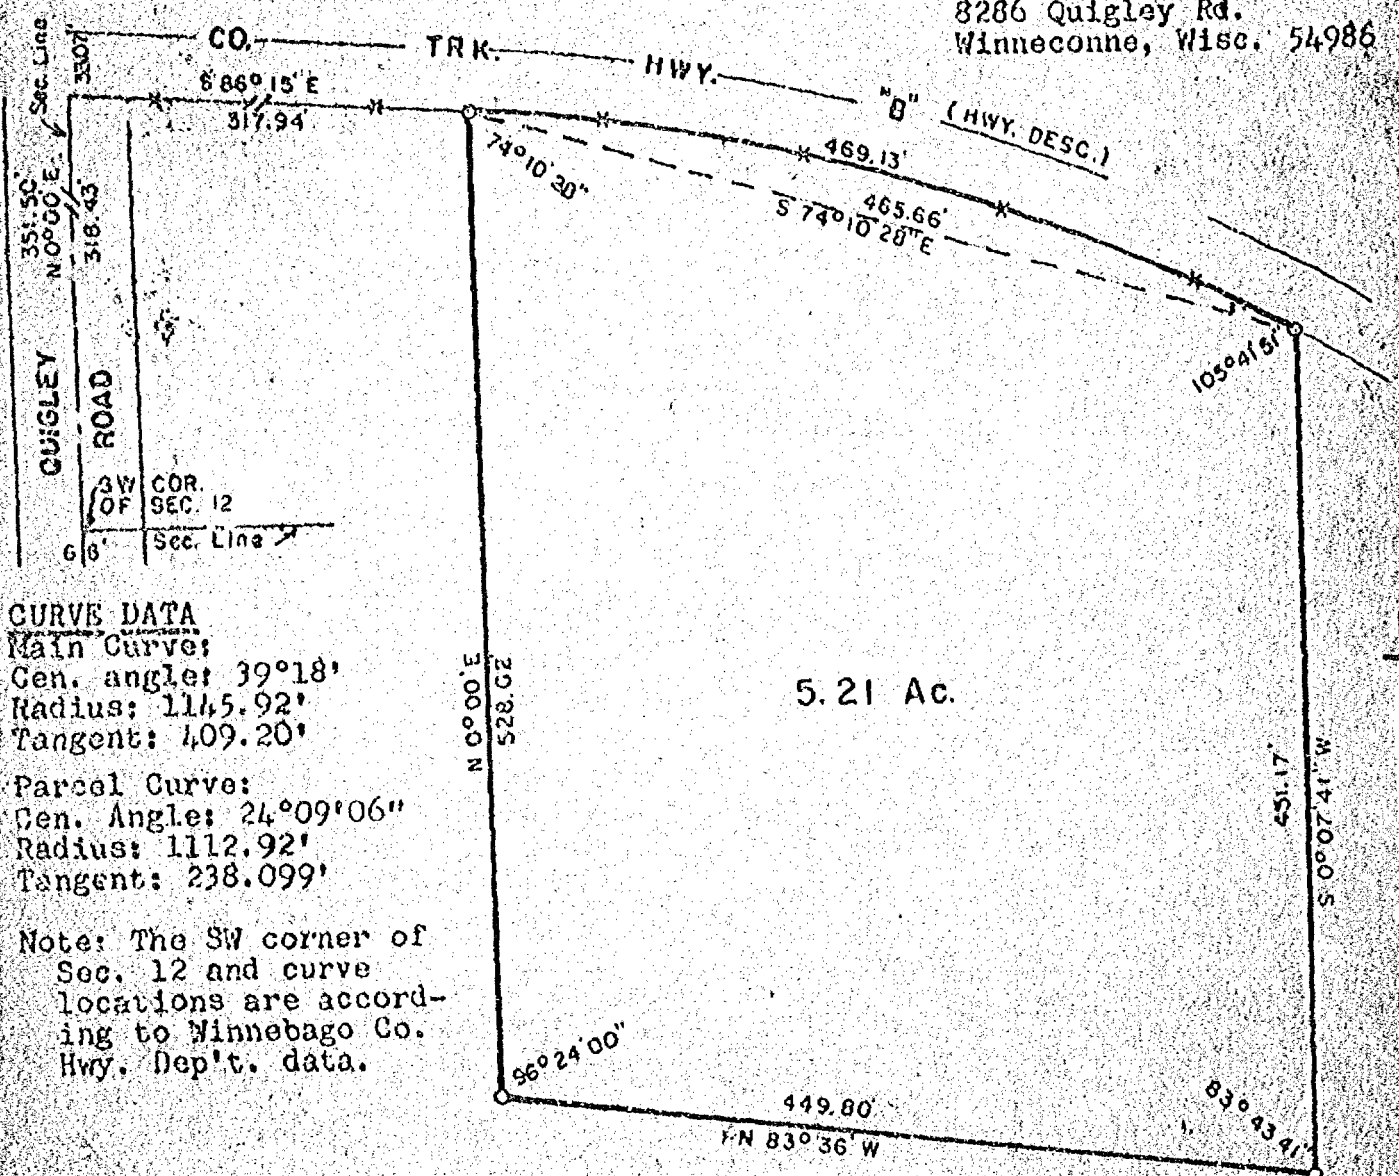

CURVE DATA
Main Curve:
Gen. angle: 39°18'
Radius: 1145.92'
Tangent: 409.20'
Parcel Curve:
Gen. Angle: 24°09'06"
Radius: 1112.92'
Tangent: 238.099'
Note: The SW corner of Sec. 12 and curve locations are according to Winnebago Co. Hwy. Dep't. data.

DESCRIPTION:
All that part of the SW $\frac{1}{4}$ of the SW $\frac{1}{4}$ of Sec. 12 and part of the NW $\frac{1}{4}$ of the NW $\frac{1}{4}$ of Sec. 13; all in T.19N., R.14E. in the Town of Poygan, Winnebago County, Wisconsin, described as follows: Beginning at an iron pipe on the Southerly R.O.W. line of Co. Trk. Hwy. "B" that is 318.43 ft., N0°00'E and 317.94 ft., S86°15'E of the SW corner of said Sec. 12. From that point running 469.13 ft. along the arc of a curve whose chord bears S74°10'28"E, 465.66 ft., thence S0°07'41"W, 151.17 ft., thence N83°36'W, 449.80 ft., thence N0°00'E, 528.02 ft. to the said point of beginning. Being a parcel of land of 5.21 acres, more or less.

LEGEND


- = Existing monuments
- = 2" x 30" iron pipe set
- = 1" x 30" iron pipe set
- ⊙ = reference caps or RR spikes
- ⊗ = Bernsen or Harrison monuments
- X-X = fence
- () = recorded as
- = stone monument



SURVEYORS CERTIFICATE

I, hereby certify that I have surveyed the property as shown, according to official records and that the plat above drawn is an accurate and correct representation of said survey. MARCH 2, 1914

Calvin W. Hawksworth
Winneconne, Wis.
Winneconne, Wis. Registered Land Surveyor
S-1290



R. K. SAYLER, INC.
LAND SURVEYORS
WINNECONNE, WI 54986

SCALE 1 in. = 100 ft.
PROJECT NO. S-000949
FIELD BOOK 36 PAGE 153-155